




EM1 Series

New Generation Digital Stepper Drive

Product Highlights

Compatible with 5-24 V pulse input

- Opto-coupling isolation supports differential signal input, compatible with 5-24V pulse signal. No resistor required when using 24V input.

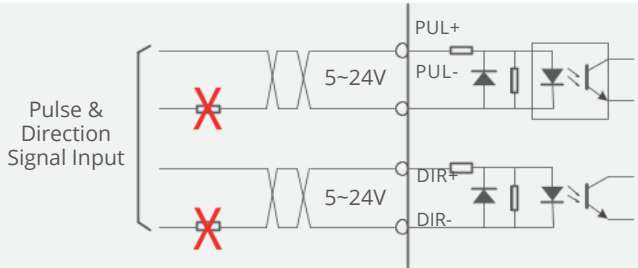

2nd DIP switches


- Can be used to set filter time, double pulse mode, limit pulse frequency 500 kHz (default 200 kHz), etc.

Dip Switch	Function	Description
SW 9	Microfine / filter setting	-
SW10	-	No filtering / filtering
SW11	auto-tuning setting	Power-on auto-tuning / no auto-tuning
SW12	Alarm output configuration setting	Often open / often closed
SW13	Effective edge setting	Rising edge / falling edge
SW14	Pulse mode setting	Single-pulse / double-pulse
SW15	Limit pulse frequency	500kHz / 200kHz




Support both pulse and IO control

- Can be switched using tuning software to meet the operation requirements of more scenarios.

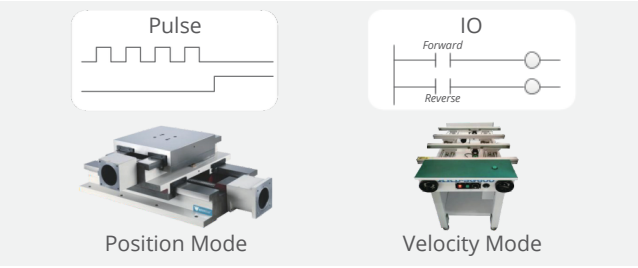


Built-in microscale

- Built-in microscopy power ridge for smooth motion curves.

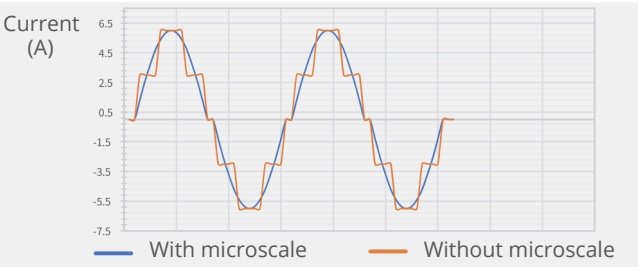


High Response & Low Vibration

- High Response Mode and Low Vibration Mode can be set using 2nd dip switch. Integrated with anti- resonance algorithm, motor jitter can be prevented when running at low speed.

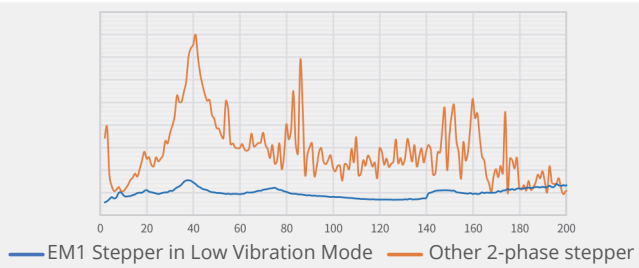


With alarm and brake output

- With alarm and brake output function, suitable for a variety of applications.

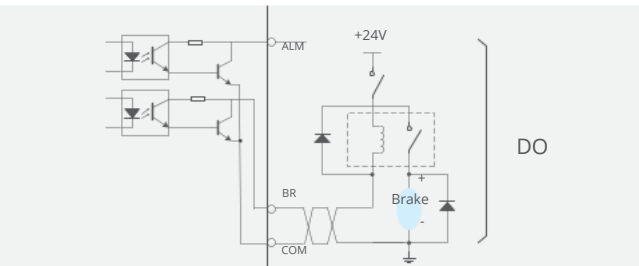


S-Curve

- Integrated S-Curve acceleration and deceleration Smooth speed curve, motor starts and stops at more stable pace.

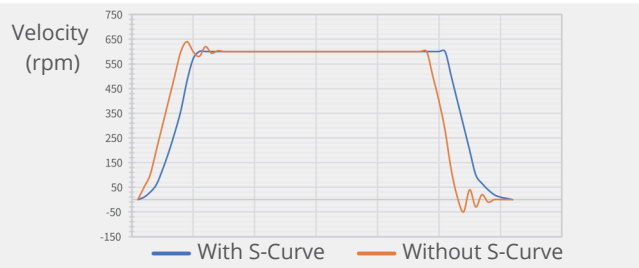

Lower motor running temperature

- High-precision current control, suppress electromagnetic noise, lowering motor temperature.

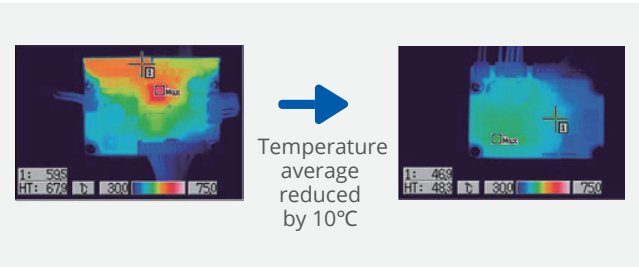

Model Number

Number of Axis

blank	Single
2	Dual

Product Series

EM	Digital Stepper
----	-----------------

Series

blank	Classic series
1	Pulse series

Control Mode

blank	Pulse type
IO	IO type

EM1 - 5 56 -

Max. Input Voltage

4	40V	5	50V
8	80V		

Custom Code

XXX

Input Power

blank	DC
AC	AC

Drive Version

blank	Standard
C	version Economy version

Peak Current Output

22	2.2A	42	4.2A
56	5.6A	70	7A
82	8.2A		

Standard series EM1 & Economic series EM1-C Comparison

Func tion	Standard type EM1 series	Economic type EM1-C series
Microscale	√	√
Anti-resonance	√	
S-curve	√	√
High Response & Low Vibration Mode	√	
Brake output	√	
Alarm output	√	
IO control	√	
Overcurrent Alarm	√	√
Overvoltage Alarm	√	√
Low Voltage Alarm	√	
Disconnection Detection	√	
Overheat Detection	√	√

Standard

EM1 series Stepper Drive

Drive Model						
	EM1-422	EM1-432	EM1-542	EM1-556	EM1-870	EM1-882AC
Dimension (L*W*H)	86*55.5*20.5		118*75.5*25.5	118*75.5*34		151*97*52
Matching Motors (Frame Size)	20/28/35/42	35/42	57	57/60	60/86	86
Input Voltage	20~36Vdc	20~36Vdc	24~50Vdc	24~50Vdc	24~80Vdc	20~70Vac 30~100Vdc
Max. Continuous Current Output	2.2A	3.2A	4.2A	5.6A	7.0A	8.2A
Pulse Voltage Input	5~24Vdc					
Max. Pulse Frequency	200kHz、500kHz Configurable					
Max. Current Output (Signal)	100mA (30Vdc Max. Voltage)					

Economic

EM1-C series Stepper Drive

Drive Model					
	EM1-322C	EM1-442C	EM1-542C	EM1-556C	EM1-860C
Dimension (L*W*H)	86*55.5*20.5	118*75.5*25.5			151*97*52
Matching Motors (Frame Size)	20/28/35/42	42/57	57	57/60	86
Input Voltage	20~30Vdc	20~40Vdc	24~50Vdc	24~50Vdc	20~70Vac 30~100Vdc 7.2A
Max. Continuous Current Output	2.2A	4.2A	4.2A	5.6A	
Pulse Voltage Input	5~24Vdc				
Max. Pulse Frequency	200kHz				

Ports & Connectors

DIP Switch 2

Switch	Settings
SW9	Microminiature/Filter
SW10	
SW11	Auto Tuning
SW12	Alarm Output
SW13	Signal Edge
SW14	Pulse Mode
SW15	Pulse Frequency Limit
SW16	Gain Switching

Output

Pin	Function
ALM	Alarm Signal
BR	Brake Signal
COM	Signal Common

Power Port

Pin	Function
GND	Power input port
Vdc	

Input

Pin	Function
A+	Motor Phase-A
A-	
B+	Motor Phase-B
B-	

RS232 Port

Pin	Signal	Label
1	TxD	RS232 Transmit
2	GND	Ground
3	RxD	RS232 Receive
4	+5V	5V Power Supply Positive (50mA)

LED Indicator

Light	Signal
Green	Power ON PWR
Red	Alarm ALM

Input

Pin	Function
PUL+	Pulse
PUL-	
DIR+	Direction
DIR-	
ENA+	Enable
ENA-	

DIP Switch 1

Switch	Settings	Switch	Settings
SW1	Dynamic Current	SW5	Precision
SW2	Direction	SW6	
SW3	Half/Full Current	SW7	
SW4		SW8	

Ports & Connectors

LED Indicator

Light	Signal
Green	Power ON PWR
Red	Alarm ALM

Input

Pin	Function
PUL+(+5V)	Pulse
PUL-(-5V)	
DIR+(+5V)	Direction
DIR-(-5V)	
ENA+(+5V)	Enable
ENA-(-5V)	

Power Port

Pin	Function
GND	Power input port
+V	

Motor Port

Pin	Function
A+	Motor Phase-A
A-	
B+	Motor Phase-B
B-	

DIP Switch

Switch	Settings	Switch	Settings
SW1	Dynamic Current	SW5	Precision
SW2		SW6	
SW3		SW7	
SW4		SW8	


Power Port (For AC Voltage Input)

Function
Power input port
AC

Output (For EM1-860C)

Pin	Function
Alarm	Alarm Signal
Alarm+	
Brake	Brake Signal
Brake+	

CM Series Stepper Motor

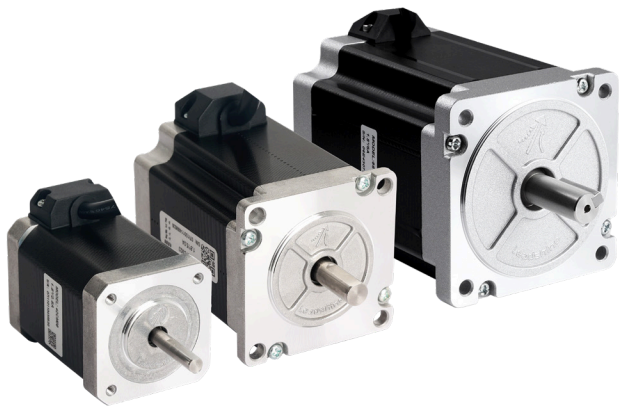

- **Flange Size:**
From NEMA 08(20mm) to NEMA 34(86mm)
2phase:20mm,28mm,35mm,42mm,57mm,60mm,86mm
- **Options**
Dual shaft IP65
waterproof
Encoder
Gearbox Brake

Great Stability

High torque

High consistency

Low Heating

Specifications

Step Angle	Flange Size (mm)	Length (mm)	Model	Rated Current (A)	Holding Torque (N·m)	Matched Drive	Remark
2-Phase1.8°	NEMA 8 (20mm)	33	20CM003	0.6	0.03	DM1-422	
		45	20CM005	0.6	0.05	DM1-422	
	NEMA 11 (28mm)	32	28CM006	1.2	0.06	DM1-422	
		41	28CM010	1.2	0.1	DM1-422	
		51	28CM013	1.2	0.13	DM1-422	
	NEMA 14 (35mm)	33	35CM015	1.2	0.15	DM1-422	
		47	35CM04	1.5	0.4	DM1-422	
	NEMA 17 (42mm)	33	42CM02-1A	1	0.2	DM1-422	
			42CM02	1.5	0.2	DM1-422	
		40	42CM04-1A	1	0.4	DM1-422	
			42CM04	1.5	0.4	DM1-422	
		47	42CM06-1A	1.5	0.6	DM1-422	
			42CM06	2.5	0.6	DM1-432	High speed
			42CM06-SZ	2.5	0.6	DM1-432	Dual shaft
			42CM06-BZ	2.5	0.6	DM1-432	Brake
		79	42CM08-1A	1.5	0.8	DM1-422	
			42CM08	2.5	0.8	DM1-432	High speed
		60	42CM08-SZ	2.5	0.8	DM1-432	Dual shaft
			42CM08-BZ	2.5	0.8	DM1-432	Brake
		92					


Step Angle	Flange Size (mm)	Length (mm)	Model	Rated Current (A)	Holding Torque (N·m)	Matched Drive	Remark	
	NEMA 23 (57mm)	41	57CM06	3	0.6	DM1-542		
		55	57CM13-3A	3	1.3	DM1-542		
			57CM13	4	1.3	DM1-542		
			57CM13-SZ	4	1.3	DM1-542	Dual shaft	
			57CM13-BZ	4	1.3	DM1-542	Brake	
		65	57CM13-FS	4	1.3	DM1-542	IP65	
		76	57CM23-3A	3	2.3	DM1-556		
			57CM23-4A	4	2.3	DM1-556		
			57CM23	5	2.3	DM1-870	High speed	
			57CM23-SZ	5	2.3	DM1-870	Dual shaft	
			57CM23-BZ	5	2.3	DM1-870	Brake	
		90	57CM23-FS	4	2.6	DM1-870	IP65	
		85	57CM26-4A	5	2.6	DM1-556		
			57CM26	5	2.6	DM1-870	High speed	
		84	57CM26-SZ	4	2.1	DM1-870	Dual shaft	
		NEMA 24 (60mm) Installation	67	D57CM21-4A	6	2.1	DM1-870	
				D57CM21	6	2.1	DM1-870	High speed
				D57CM21-SZ	4	3.1	DM1-870	
			88	D57CM31-4A	6	3.1	DM1-556	
				D57CM31	6	3.1	DM1-870	High speed
	D57CM31-SZ			5	2.2	DM1-870	Dual shaft	
	NEMA 24 (60mm)	67	60CM22X	5	2.2	DM1-870		
			60CM22X-SZ	5	3.0	DM1-870	Dual shaft	
			60CM30X	5	3.0	DM1-870		
		85	60CM30X-SZ	5	3.0	DM1-870	Dual shaft	
			60CM30X-BZ	5	3.5	DM1-870	Brake	
		125	60CM35X-FS	4	3.5	DM1-870	IP65	
		NEMA 34 (86mm)	65	86CM35	6	4.5	DM1-870	
	80		86CM45	6	4.5	DM1-870		
			86CM45-SZ	6	4.5	DM1-870	Dual shaft	
	114		86CM45-BZ	6	4.5	DM1-870	Brake	
	90		86CM45-FS	6	8.0	DM1-882AC	IP65	
	98		86CM80	6	8.5	DM1-882AC		
	118		86CM85	6	8.5	DM1-882AC		
			86CM85-SZ	6	8.5	DM1-882AC	Dual shaft	
			86CM85-BZ	6	8.5	DM1-882AC	Brake	
	152		86CM85-FS	6	12	DM1-882AC	IP65	
	128		86CM85-FS	6	12	DM1-882AC		
	129		86CM120	6	12	DM1-882AC		
	163		86CM120-BZ			DM1-882AC	Brake	
164	86CM120-FS				DM1-882AC	IP65		

Product Solutions

Woodworking CNC Router




- Simple tuning process using EM1-C Series Stepper Drive and CM series Stepper Motor.
- Up to 25% higher torque with low heating and lower vibration.
- Integrated with alarm and brake output for operational safety.

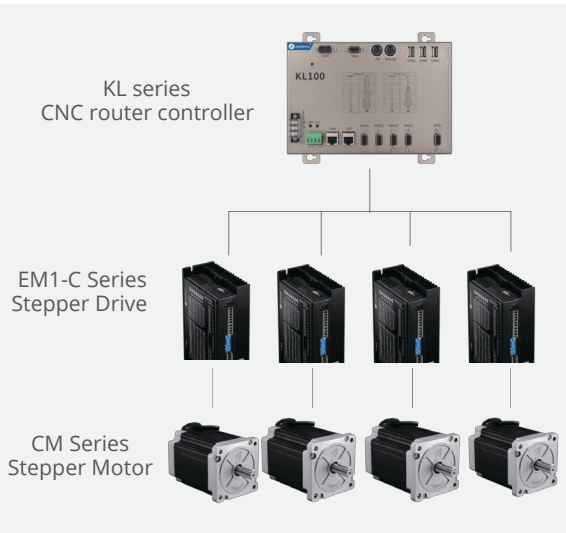


Labeling Machine

- Pulse control stepper system for easy setup of the machines.
- Precise label roller control and product conveying system using new EM1 series stepper drive.

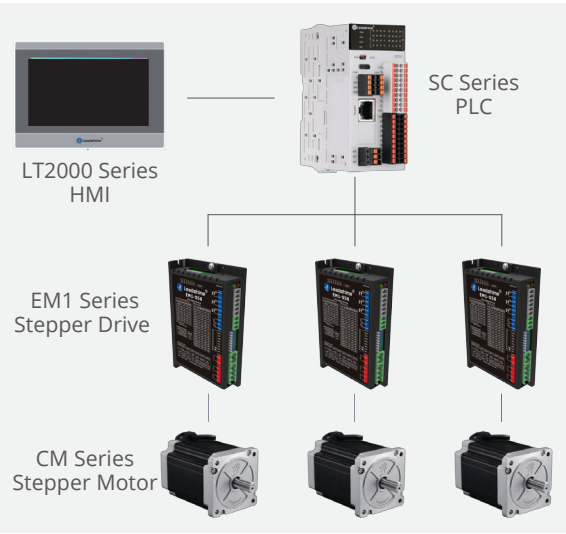

Food Packaging Machine

- Full range of EM1 series stepper drives available for various type of machine application with matching stepper motors from NEMA 8 to 34.
- Pulse and IO control can be used for control using new EM1 series stepper drives.

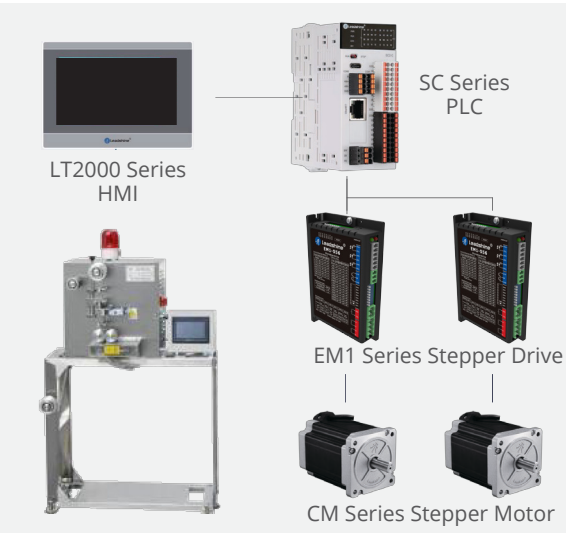

Headquarters China Leadshine Technology Co., Ltd.

☎ +86 755 26411692 📠 +86 755 26402718
🌐 www.leadshine.com
✉ sales@leadshine.com (Sales)
 tech@leadshine.com (Technical Support)
📍 15-20/F, Block B, Nanshan i-Valley, Shuguang Community,
 Xili Town, Nanshan District, Shenzhen 518055, China

North America Office Leadshine America, Inc.

☎ 1-949-608-7270 📠 1-949-638-7298
🌐 www.leadshineusa.com
✉ sales@leadshineusa.com (Sales)
 support@leadshineusa.com (Technical Support)
📍 26050 Towne Centre Dr.Foothill Ranch, CA 92610 USA