



EAGLE



ErreUno S.r.l.

Via Novella ,13
43058 Sorbolo (PR) Italy
Tel : +39 / 0521 694164
Fax: +39 0521-1851863
P.I / CF : 02379290345
RAE : 233443

Eagle-5iR16

i3-i5-i7 processor

Slim fanless for 5th Generation Intel®

support Intel Core i7 Processor

- Aluminium fanless CPU cooling design
- Stylish front panel diamond effect
- Support one serial port
- Support IR remote function



www.erre1.it



info@erre1.it



ERREUNO.SRL



www.syby.it

Pag. 1 di 5



EAGLE



ErreUno S.r.l.

Via Novella ,13
43058 Sorbolo (PR) Italy
Tel : +39 / 0521 694164
Fax: +39 0521-1851863
P.I / CF : 02379290345
RAE : 233443


Chassis external :

Aluminium black

247 x 240 x 38.5mm (W x D x H) - Vesa hole


Kensington lock

No Brand or Logo

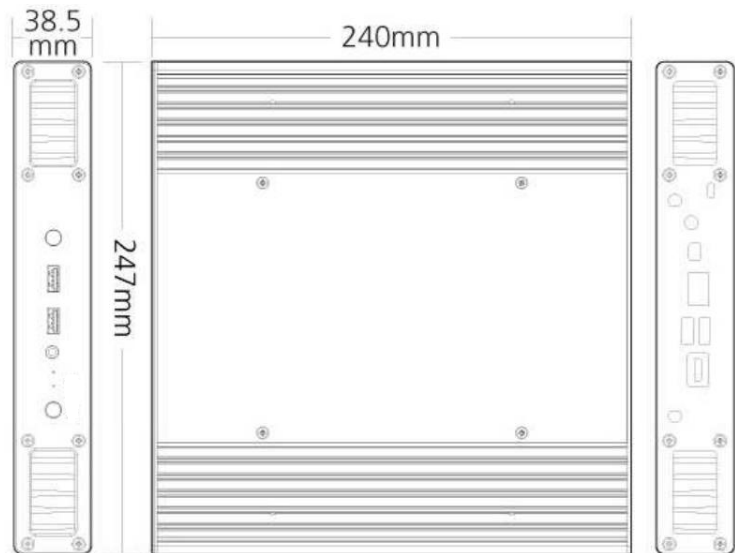

Totally silent

fanless CPU cooling design

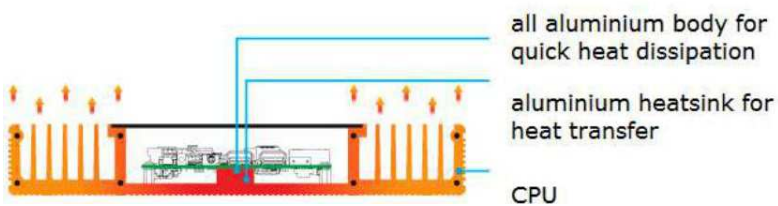



EAGLE



ErreUno S.r.l.

Via Novella ,13
43058 Sorbolo (PR) Italy
Tel : +39 / 0521 694164
Fax: +39 0521-1851863
P.I / CF : 02379290345
RAE : 233443

Eagle-5iR16-3

Eagle-5iR16-5

Eagle-5iR16-7

PROCESSOR

- 5th generation Intel® Core™ i3-5010U processor (2.1 GHz Dual Core, 3 MB Cache, 15W TDP)
- Supports Intel® Hyper-Threading Technology5
- Supports Intel® 64 architecture6

GRAPHICS

- Intel® HD Graphics 5500
- One Mini DisplayPort* version 1.2 supporting ultra-high definition 4K displays and multiple monitor functionality
- One Mini HDMI* 1.4a port

SYSTEM MEMORY

- Two DDR3L SO-DIMM sockets (up to 16 GB, 1333/1600 MHz) in dual channel configuration, 1.35V

STORAGE CAPABILITIES

- One M.2 Type M connector supporting 22x42, 22x60, and 22x80 SATA or PCIe*7 SSDs
- One SATA 6Gbps port for connection to 2.5" HDD or SSD (up to 9.5 mm thickness)

PERIPHERAL CONNECTIVITY

- Integrated Intel® Gigabit LAN
- Four Super Hi-Speed USB 3.0 ports (two back panel ports and two front ports including one charging port)
- Two additional Hi-Speed USB 2.0 ports via internal header
- Intel® Dual Band Wireless-AC 7265, 802.11ac, 2x2, up to 867Mbps
- Dual Mode Bluetooth 4.0

PROCESSOR

- 5th generation Intel® Core™ i5-5250U processor (1.6 GHz up to 2.7 GHz Turbo Dual Core, 3 MB Cache, 15W TDP)
- Supports Intel® Hyper-Threading Technology6
- Supports Intel® 64 architecture7

GRAPHICS

- Intel® HD Graphics 6000
- One Mini DisplayPort* version 1.2 supporting ultra-high definition 4K displays and multiple monitor functionality
- One Mini HDMI* 1.4a port

SYSTEM MEMORY

- Two DDR3L SO-DIMM sockets (up to 16 GB, 1333/1600 MHz) in dual channel configuration, 1.35V

STORAGE CAPABILITIES

- One M.2 Type M connector supporting 22x42, 22x60, and 22x80 SATA or PCIe8 SSDs
- One SATA 6Gbps port for connection to 2.5" HDD or SSD (up to 9.5 mm thickness)

PERIPHERAL CONNECTIVITY

- Integrated Intel® Gigabit LAN
- Four Super Hi-Speed USB 3.0 ports (two back panel ports and two front ports including one charging port).
- Two additional Hi-Speed USB 2.0 ports via internal header
- Intel® Dual Band Wireless-AC 7265, 802.11ac, 2x2, up to 867 Mbps
- Dual Mode Bluetooth 4.0

PROCESSOR

- 5th generation Intel® Core™ i7-5557U processor (3.1 GHz up to 3.4 GHz Turbo Dual Core, 4 MB Cache, 28W TDP)
- Supports Intel® Hyper-Threading Technology1
- Supports Intel® 64 architecture1

GRAPHICS

- Intel® Iris™ graphics 61001
- One Mini DisplayPort* version 1.2 supporting ultra-high definition 4K displays and multiple monitor functionality
- One Mini HDMI* 1.4a port

SYSTEM MEMORY

- Two DDR3L SO-DIMM sockets (up to 16 GB, 1333/1600 MHz) in dual channel configuration, 1.35V

STORAGE CAPABILITIES

- One M.2 Type M slot supporting 22x42, 22x60, and 22x80 SATA or PCIe3 SSDs
- One SATA 6 Gbps port for connection to 2.5" HDD or SSD (up to 9.5 mm thickness)

PERIPHERAL CONNECTIVITY

- Integrated Intel® Gigabit LAN
- Four Super Hi-Speed USB 3.0 ports (two back panel ports and two front ports including one charging port)
- Two additional Hi-Speed USB 2.0 ports via internal header
- Intel® Dual Band Wireless-AC 7265, 802.11ac, 2x2, up to 867 Mbps
- Dual Mode Bluetooth* 4.0



EAGLE



ErreUno S.r.l.

Via Novella ,13
43058 Sorbolo (PR) Italy
Tel : +39 / 0521 694164
Fax: +39 0521-1851863
P.I / CF : 02379290345
RAE : 233443

BOARD PRODUCT SAFETY REGULATIONS AND STANDARDS

- IEC 60950-1
- UL 60950-1
- EN 60950-1
- CAN/CSA-C22.2 No. 60950-1

BOARD EMC REGULATIONS AND STANDARDS (C L A S S B)

- CISPR 22
- FCC CFR Title 47, Chapter I, Part 15, Subparts A, B
- ICES-003
- EN 55022
- EN 55024
- VCCI V-3, V-4
- KN-22
- KN-24
- CNS 13438

BOARD ENVIRONMENTAL REGULATIONS

- RoHS Directive 2011/65/EU
- WEEE Directive 2002/96/EC
- China RoHS MII Order #39

- 5 Kensington lock support
- 6 Backpanel DC power connector (12V - 19V)
- 7 One Mini DisplayPort[®] version 1.2 supporting 8 channel digital audio (7.1 surround sound)
- 8 Intel[®] Gigabit LAN
- 9 2x USB 3.0 ports on the back panel
- 10 Mini HDMI[®] port supporting HDMI 1.4a and 7.1 surround sound
- 11 Support for user-replaceable third-party lids
- 12 2x USB 3.0 ports on the front panel (including one charging port)
- 13 Intel[®] HD Audio[®] via Headphone/Microphone jack
- 14 Consumer infrared sensor

FRONT



REAR






EAGLE



ErreUno S.r.l.

Via Novella ,13
43058 Sorbolo (PR) Italy
Tel : +39 / 0521 694164
Fax: +39 0521-1851863
P.I / CF : 02379290345
RAE : 233443

Optional & accessory



Eagle-5iR16-rack

Kit for rack mount 1 U