



Enabling an Intelligent Planet

Product Catalog 2018-2019

Industrial IoT Systems and Devices

Enabling Industrial IoT with Intelligent Automation

- Software and Industry Solutions
- Industrial Server
- Intelligent System
- Intelligent HMI and Monitors
- Automation Computers and Controllers
- Industrial Communication
- Remote I/O & Wireless Sensing Modules
- Industrial I/O and Video Solutions

ADVANTECH

Enabling an Intelligent Planet

www.advantech.com

Table of Contents

Corporate Information

- 003 About Advantech
- 004 Advantech Online Services
- 005 The Industrial Internet of Things (IIoT)
- 007 Enabling IIoT and Industry 4.0 with
Sector-Focused Solutions and Intelligent Automation
- 009 Global Certified Partner Network
- 011 Advantech iPlanet Care
- 012 One-Stop Global Services

Star Product Highlights

- 013 Advantech WISE-PaaS Edge Intelligence Platform
- 014 iFactory and M2I Solution-Ready Packages
- 015 Energy & Environment Solution-Ready Packages
- 016 Machine Automation
- 017 Power and Energy Solutions
- 018 Intelligent Transportation Systems
- 019 Intelligent Systems and Platforms
- 021 Embedded Automation Computers
- 023 Intelligent HMI
- 026 Control IPCs
- 027 Edge DAQ Devices
- 029 Industrial Communication
- 032 Wireless IoT Sensing Devices
- 033 Data Acquisition and Control
- 035 Remote I/O Modules
- 036 Industrial Tablets for Mobile Workers

Solution Forums

- 037 Enabling an Industrial IoT Evolution
- 039 Industry 4.0
- 041 Industrial Equipment Manufacturing Solutions
- 043 Intelligent Transportation Systems
- 045 Cloud-enabled Energy & Environment Solutions

WISE-PaaS 2.0

- 047 Enabling IoT Edge Intelligence with WISE-PaaS

CH1

Software and Industry Solutions

- 1-2 WISE-PaaS/IIoT and WebAccess Software
- 1-5 iFactory & M2I/CNC Solution Ready Package
- 1-7 E&E & M2I/E&E Solution Ready Package
- 1-9 Intelligent Motion Control and Machine Vision
- 1-20 Power & Energy Solution
- 1-24 Intelligent Transportation Platforms

CH2

Industrial Server

- 2-2 Industrial Storages
- 2-4 GPU Servers
- 2-6 Industrial Server Boards
- 2-11 Industrial Server Chassis

CH3

Intelligent System

- 3-2 Slot SBC & Passive Backplanes
- 3-14 Industrial Motherboards
- 3-17 Industrial Chassis
- 3-21 CompactPCI Platforms
- 3-23 Industrial Computer Peripherals

CH4

Intelligent HMI and Monitors

- 4-4 Modular Panel PC
- 4-5 High-Performance Control Panels
- 4-7 Thin-Client Terminals
- 4-9 Domain Focused
- 4-10 Industrial Operator Panel
- 4-11 Industrial Monitors
- 4-14 General Panel PC

CH5

Automation Computers and Controllers

- 5-2 Control Cabinet PCs
- 5-7 Industrial IoT Gateways
- 5-11 iDoor Technology Modules
- 5-16 Modular IPCs
- 5-20 Intelligent Inspection Systems
- 5-24 Control IPCs
- 5-31 WISE-PaaS/EdgeLink-Enabled Gateways:
ADAM-3600, ECU-1000TL
- 5-35 Remote DA&C Systems: ADAM-5000
- 5-42 Edge Data Acquisition and Analytics Platform:
ADAM-6700

CH6

Industrial Communication

- 6-2 Industrial Ethernet Solutions
- 6-16 Industrial Wireless and Protocol Gateway Solutions

CH7

Remote I/O & Wireless Sensing Modules

- 7-2 Wireless IoT Sensing Devices
- 7-9 Ethernet I/O Modules: ADAM-6000
- 7-15 RS-485 I/O Modules: ADAM-4000

CH8

Industrial I/O and Video Solutions

- 8-2 Industrial I/O
- 8-23 Intelligent Video Solutions



Enabling an Intelligent Planet

About Advantech

Advantech : Partnering for Smart City and IoT Solutions

Founded in 1983, Advantech has the corporate vision to “Enable an Intelligent Planet”. The company is a global leader in the fields of IoT intelligent systems and embedded platforms. To embrace the trends of IoT, big data, and artificial intelligence, Advantech promotes IoT hardware and software solutions with the Edge Intelligence WISE-PaaS core to assist business partners and clients in connecting their industrial chains.

Advantech is also working with business partners to co-create business ecosystems that accelerate the goal of industrial intelligence.

Advantech’s Good-to-Great 3-Circle Principle

The Advantech 3-Circle Principle is based on the book “Good to Great,” by Jim Collins. According to the book, a company looking for long-term success should clearly address these three fundamental principles, and commit to their continuing, solid execution. Advantech is fully committed to this approach and has defined the Advantech “Good to Great 3-Circle Principle” as a means of adhering to it.

World-Class Recognition

Advantech is an authorized alliance partner of both Intel® and Microsoft®. Our customers find the technologies we use inside our products to be widely compatible with other products in the global marketplace. Interbrand, the world renowned brand consulting firm, recognized Advantech as one of the Top 20 Taiwanese Global Brands for many years. Advantech appreciates this recognition of our efforts to build a trusted, global brand; it also symbolizes a promise we give to our business partners, which is to keep building a trustworthy brand that is recognized everywhere and improves the lives of all.



Quality and Environmental Compliance

As a member of the global village, Advantech understands the importance of preserving the environment. Our environmental programs focus on reducing, reusing, and recycling materials used in our manufacturing operations. Advantech’s quality and environmental compliance efforts include the

- ISO 9001 Certification
- ISO 14001 Certification
- ISO 13485 Certification
- OHSAS 18001 Certification
- TL9000 Certification
- ISO 17025 Certification
- RoHS Directive Compliance
- WEEE Directive Compliance
- Authorized Sony Green Partner
- REACH SVHC Directive Compliance
- EICC Conflict Minerals Declaration

Timely Support at Your Convenience

Advantech has over 20 regional hotlines and offices throughout 23 countries, with over 8,000 employees employees to provide efficient, professional services for customer care, product selection, technical support, and order handling. Through our call centers and online stores, customers worldwide enjoy the convenience of Advantech’s multi-service channels to reduce business turnaround time. Together with the four logistics centers in Taiwan, China, Europe and the United States, our global service network offers an extensive spectrum of services that includes warehousing, logistics, peripheral certification, sourcing & purchasing, and RMA & value-added services, and technical support & training.

Advantech Online Services

Advantech.com Website

Through www.advantech.com, we not only offer comprehensive products, but also real-time updated information to our customers. In addition to product information, you also can find case studies of proven applications from diverse sectors. Furthermore, registered MyAdvantech members, can access the RMA service center, updated price lists, and various promotion programs.



Buy.Advantech.com

Online Store

To extend Advantech's services, we launched the Buy.Advantech online store which offers one-stop shopping for Human Machine Interfaces, Industrial Ethernet networking, Controller & I/O products, plus computing platforms. This eStore offers comprehensive product information to build systems easily, with live expert support to solve problems, online configuration providing easy system customization options, instant quotations, an extensive library of FAQs and all the latest up-to-date downloads and firmware.

Online Support

Providing superior self-support mechanisms is one of the most essential parts of being a top-tier automation company, and we take pride in the outstanding level of service that we offer. To best support our customers, we've created a suite of useful interactive online tools, including:

- **Technical Documents:** Manuals, datasheets, updated drivers and utilities—all available for download through the support portal.
- **3D Product Models:** Simulated products in 3D format to provide detailed visualizations for evaluation.
- **Online Training:** Self-training documents and videos to provide trainees with integrated information.
- **Online Catalog:** A comprehensive online catalog with extensive product information.



support.advantech.com



24/7 Online Service

To effectively respond to customers' questions, our regional call centers support inquiries about: purchasing, shipping, technical, RMA issues and more. Contact your regional call center to get the support you need today.


Global Hotlines

| | | | | | |
|-------------|-----------------------|------------------------|-------------------|-------------------|--|
| US / Canada | 1-888-576-9668 | China | 800-810-0345/8389 | Russia | 8-800-555-01-50 (Moscow) 8-800-555-81-20 (St. Petersburg) |
| Mexico | 52-01-800-467-2415 | Taiwan | 0800-777-111 | India | 1-800-425-5070/71 |
| Colombia | 57-1381-2858 | Japan | 0800-500-1055 | Thailand | 66-2-248-3140 |
| Brazil | 0800-770-5355 | Korea | 080-363-9494/9495 | Indonesia | 62-21-7511939 |
| Europe | 00800-2426- 8080/8081 | Singapore | 65-6442-1000 | Malaysia (KL) | 60-3-7725-4188 |
| | | Australia/ New Zealand | 1300-308-531 | Malaysia (Penang) | 60-4-537-9188 |

The Industrial Internet of Things (IIoT)

Advancing Key Growth Areas in Industry 4.0, Industrial Equipment Manufacturing, Energy & Environment and Transportation

The Industrial Internet of Things (IIoT) is set to open up a new era of industrial applications, booming opportunities, and economic growth. The IIoT is a matrix of networks that connects people with data and intelligent machines in order to optimize industrial operations, productivity, and efficiency. To support the growth of IIoT, Advantech provides products and services that build the IIoT infrastructure and strengthen their offerings with four layers including, IoT Sensing Devices, Edge Intelligence Servers (EIS), IoT Cloud Platforms, and Solution Ready Package (SRP). Advantech is devoted to leveraging its computing, data acquisition, and networking competence to provide customer-centric products and solutions for key growth areas in Industry 4.0, Industrial Equipment Manufacturing, Energy & Environment, and Transportation.

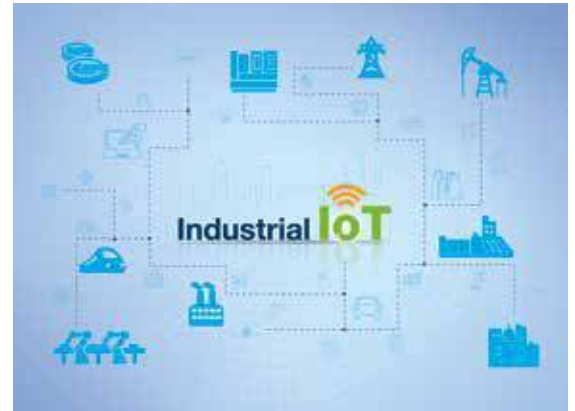

Realizing Industry 4.0 with Advantech's iFactory SRP Solutions

Industry 4.0 is transforming manufacturing worldwide. Factory management needs assistance as they either upgrade existing facilities, or establish new ones that take advantage of Industry 4.0 optimization. Advantech IoT solution architecture enables the development of iFactory Solution Ready Packages (SRPs) that help customers as they embrace Industry 4.0. Advantech's iFactory SRPs are quick-start tools that enable a step-wise approach to achieving Industry 4.0.

The Industry 4.0 situation room is the most important upgrade to intelligent transformation. The Industry 4.0 situation room is the factory's nerve center where data is collected, analyzed, and visualized for real-time management. The situation room is realized with the iSensing devices, edge intelligent gateways, WISE-PaaS software platforms, and iFactory SRP solutions.

iFactory solutions facilitate machine connection without replacing existing equipment, allowing for collection of equipment status data, production data, and environmental data. Data acquisition enables production monitoring, data integration with MES, and visualization on the situation room dashboard for production optimization and data-driven decision making. The WebAccess App enables push notifications of unexpected downtime, allowing immediate action to be taken. Advantech realizes the intelligent factory from a user perspective, and helps customers embrace Industry 4.0.



The best industrial equipment manufacturing solutions for equipment builders

A key step Advantech adopts to realize smart manufacturing is to connect devices, computing systems, and equipment all together to accomplish data acquisition and integration, and import services to accomplish manufacturing process integration. Advantech achieves the network connection of equipment and devices needed to improve manufacturing and transform industry.

The product offerings of Advantech's industrial IoT include Internet of Things software – WebAccess, industrial communication products, gateways, PC-based control platforms, industrial computing platforms, servers and data capture modules. Meanwhile, Advantech also provides equipment automation and intelligent factory solutions. In the vertical markets of equipment automation, Advantech works with partners to find the most suitable industrial machinery, electronic equipment, and manufacturing solutions to meet the needs coming from diverse markets.



Cloud-enabled Energy and Environment Solutions

As the development of IoT and cloud technology, lots of Energy & Environment practices have evolved to remote management using cloud service for further analytics, visualization, and machine learning. However, there are still many difficulties system integrator and equipment operators need to overcome, including getting data from wide area, connecting data to different cloud service, and making data visible and applicable.

To shorten the gap and accelerate our customers' time-to-market, Advantech is devoted to offering Solution Ready Packages (SRP) for Energy & Environment markets based on our success of both hardware/software products and domain experience.

With our Machine-to-Intelligence (M2I) SRP, which include power inverters, water pumps, HVAC, and transformers, equipment builders can easily get the status of their machines and facilities then connect their data to the cloud. By integrating different M2I SRP into vertical system SRP, system integrators can quickly build up energy, solar power, water treatment, and pollution management solutions.



Intelligent Transportation Systems

With a decade of successful experience, Advantech has dedicated resources to designing and developing new products designed for the transportation industry. These products support both railway and roadway applications, including railway automatic fare collection, wayside control, rolling stock, city traffic management, highway management, transport hubs, and more. Our mission is to enable intelligent transportation systems, which also helps us fulfill our vision of creating and delivering smart city technologies.

Enabling IIoT and Industry 4.0 with Sector-Focused Solutions and Intelligent Automation





Global Certified Partner Network

Since 1983, Advantech has formed strong and lasting partnerships with many well-established channel partners and solution partners to deliver prompt and reliable local services for our customers. Currently, Advantech has over 600 partners in more than 70 countries worldwide to provide certified services and products anytime, anywhere.

Certified Professionals Guarantee Outstanding Quality Services

Through rigorous training and validation, our partners are certified annually, guaranteeing a high standard of quality and service. With these dedicated and well-trained sales and technical support teams, Advantech customers can enjoy outstanding quality services and early access to latest industrial computing solutions.

- **Value-added services:** Many of our partners are, value-added resellers, focused channels, system integrators, or independent software vendors specialized in specific industry segments or applications with years of experience in developing application ready platforms.
- **Quality technical support:** All the partners have dedicated application engineers to provide pre-sales and post-sales technical support. Within Advantech, there's a group of hotline and field application engineers to back up our partners, ensuring the highest service levels.
- **Fast delivery with flexible global supply chain:** With over 600 partners and 4 regional service centers worldwide, Advantech offers fast delivery and after-sales support to our customers.

Their profound knowledge in integrating Advantech's hardware platforms with peripherals and software can speed up your time-to-market.



Strategic Focus Makes the Difference

As industrial and embedded computing applications become more diversified, customers are demanding tailored solutions for vertical applications plus high-quality local support. To fulfill such needs, Advantech has developed its global partner network with a strategic focus in mind. We only partner with distributors, VARs, and system integrators who value high-quality services as we do and pride themselves with expert industry know-how and technical proficiency. Through our comprehensive training and certification programs, Advantech partners are expert consultants in our portfolio of product and service offerings for various vertical segments. Currently, Advantech has partners in the following categories:

Channel Partners

Advantech Industrial IoT Channel Partners (CPs) are focused on industrial automation, embedded systems, and general computing platform markets. With local inventory, logistic services, technical support and other add-on value services, our partners provide professional services and prompt delivery of system and components for automation applications. Aligned with our regional sales offices and service centers, Advantech CPs have formed a strong service network to offer professional pre-sales and post-sales worldwide. Advantech has also identified key channel partners and focused on specific vertical segments, to provide local value added services for our customers such as application development, technical consultation, design services, integration and installation, on-site services, technical training, and project management. These CPs are certified value-added resellers with expertise in application development and system integration for each vertical segment.



Solution Partners



Solution Partners are 3rd parties who integrate Advantech products and value-added software and peripherals to provide turn-key solutions. Advantech's Solution Partners offer our customers a full range of field proven integrated solutions in Medical, Telecom, Transportation, Gaming, Power & Energy, Building & Home Automation, Factory & Machine Automation, Environmental Monitoring & Facility Management, Retail, Hospitality & Selfservice, and many more. Their solutions are validated with Advantech products for compatibility, quality, and service.

WISE-PaaS Alliance


Advantech WISE-PaaS Alliance is a market-oriented cooperation model based on Advantech's WISE-PaaS software platform. WISE-PaaS/IIoT is one of the two software components of WISE-PaaS Alliance and is designed to connect partners, cultivate co-development of vertical solutions, and encourage strategic co-marketing. By providing comprehensive IoT solutions for diverse markets and applications, WISE-PaaS/IIoT can enable partners to expand into various IoT vertical markets. By leveraging WISE-PaaS/IIoT and WebAccess platform and solutions, partners will be able to shorten their project life cycles through integrated solutions, gain competitive advantages through early technology access, boost profits and revenue through co-marketing activities, and enable cross-region business through Advantech's business networking and coverage.

Advantech iPlanet Care

Manufacturing

Our dual, world-class manufacturing centers in Taiwan and China maintain precise quality control, and offer a full range of production in a timely and cost-effective manner. To maximize the efficiency of operational procedures, we have implemented a cluster manufacturing system within our segmented manufacturing service units. This unique approach enables a direct, simplified, and highly streamlined design-to-manufacturing process.

- In-house board, chassis, and system production
- Dual world-class manufacturing centers minimize business risks
- Advanced production capabilities and customizable processes
- Rigid quality assurance system
- Most complete ISO standard coverage

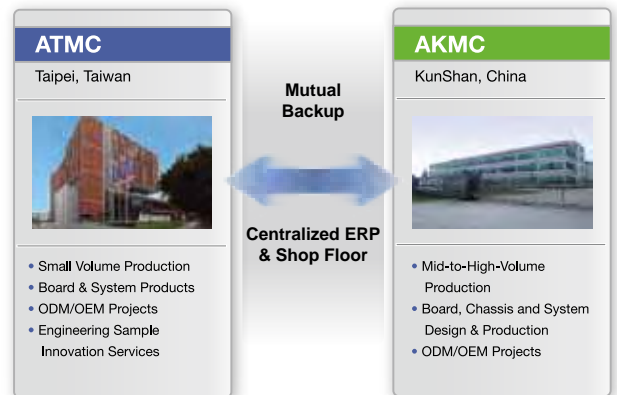

Configure To Order Services

Advantech's Configure To Order Services (CTOS) makes industrial computing solutions more accessible by offering web-based configuration tools, comprehensive, complex assembly services with high-mix, low-volume box build and customized assembly, modification, system integration and functional testing services.

- Online intelligent configuration
- Comprehensive approach to complex configuration solutions
- Local customized configuration services
- 2 year global warranty covering system & peripherals integrated

ADVANTECH CTOS
Configure To Order Services

Certified Quality Assurance System

Advantech has been designing and manufacturing industrial PCs according to our 3C Quality Statement:

- Always strive for overall customer satisfaction
- Continuous improvement
- Apply closed-loop mechanisms to resolve problems



At Advantech, quality is our main priority. A complete line of safety, EMC and reliability measures such as ESD, vibration, drop testing, temperature, humidity and HALT chambers are available to ensure our products meet the strictest standards. All facilities are at least ISO 9001 and 14001 certified while others hold additional certifications such as ISO 13485, 17025, TL9000 and OHSAS18001. An environmental program that focuses on reducing, reusing and recycling of materials throughout the manufacturing process is also applied at Advantech. All our products are 100% RoHS compliant and hazardous substance management systems are applied to meet worldwide environmental requests. Advantech's efforts towards environmental protection have been recognized by Sony since 2004 (Sony Green Partner).

- Complete ISO coverage
- Constant quality and reliability monitoring
- Green policies
- Ease of access to quality contacts

One-Stop Global Services

Advantech iPlanet Care combines exceptional business expertise, powerful design capacities, and a thorough global service network to provide one-stop global services and total solutions. Our broad range of global support packages adds maximum flexibility and efficiency to your projects.



Global Logistics Services

With strong integrated ERP and SAP supply chain solutions, our worldwide logistics network offers a wide range of options for different delivery models including local and global solutions that meet your unique needs and budget requirements. Advantech's Logistics Service gives you the flexibility to simplify your logistical networks, bring your products to market on time, and enjoy a timely return on your investment.

- Optimized and flexible shipping solutions
- Integrated ERP and SAP supply chain solution with global distribution network
- Centralized plants with local delivery

Global Peripheral Procurement Services

Advantech global peripheral procurement network consists of local teams that leverage strong, worldwide supplier relationships and strict vendor and product management to offer quality-guaranteed, compatible peripherals with short lead times and competitive prices.


Global Customer Support Services

- Localized procurement with worldwide network support
- Global standardization management; 100% compatible peripherals
- Trusted quality with revision control
- Short lead time and competitive price

Our global presence provides localized reliable customer support services. We can create an optimized maintenance and support plan, leveraging the full power of our service portfolio to help reduce costs and proactively mitigate business risks to best meet your needs. In addition to our complete technical and repair support, we provide a variety of customizable after-sales services, including extended warranty, advance replacement, upgrades, fast repairs, and more. With our knowledgeable local support groups, we enable a consistent support experience around the world and help keep your investment at peak performance and within your budget.



- 24/7 technical support: hotline AE & online chat support
- Easy-to-use web-based repair and tracking system (eRMA)
- Global deployment with local full-line repair capability
- Various value-added, after-sales service packages

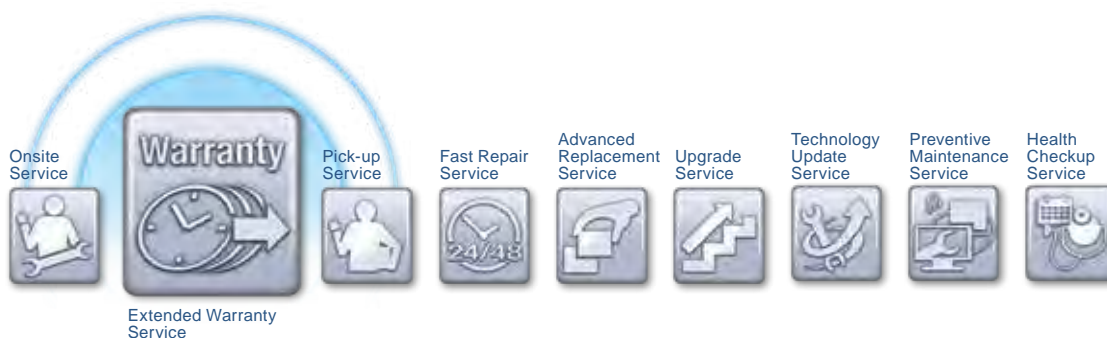

Advantech WISE-PaaS Edge Intelligence Platform

Enabling IoT Edge Intelligence & IoT Innovative Business Models



Advantech's key strategies for the next decade are to provide integrated IoT solution platforms. The Advantech WISE-PaaS Edge Intelligence Platform offers a diverse range of software that can be applied and integrated into domain-focused SRPs. This platform provides a wide range of software and cloud-based service solutions from industrial data/ video acquisition, analysis, and visualization to cloud platform services and dashboard functions, thus enabling IoT at all system layers and realizing IoT-powered business models in various vertical markets. Join Advantech's WISE-PaaS VIP program and enjoy IoT success by leveraging WISE-PaaS's comprehensive solutions.

Advantech WebAccess Software



WebAccess/SCADA

WebAccess/SCADA

Industrial IoT Application Software Platform

- Enables 100% web-based remote engineering, monitoring, and control
- Driver support for major PLCs, PACs, I/O modules, CNCs, network switches, and computer platforms
- Redundant SCADA, ports, and devices for high availability
- Supports multiple databases for data connectivity and data fusion
- HTML5-based dashboard for cross-browser, cross-platform data visualization and data analysis
- Provides flexible open interfaces for easy development and integration of third-party applications
- Plug-and-play functionality ready for private cloud solution
- Online software license authentication for cloud computing virtual machines



WebAccess/HMI

WebAccess/HMI

HMI Runtime Development Software

- Smart screen management
- Project-based management for multiple applications
- Software support for a diverse range of machines
- Provides efficient tools for easy customization
- Boosts performance with simulations
- Enhanced data security



WebAccess/CNC

WebAccess/CNC

CNC Machine Networking Solution

- Supports leading CNC network controllers
- Supports CNC machine and I/O device monitoring
- Provides CNC availability queries and NC file transfer function
- Supports all features and full functions of WebAccess/SCADA software
- Automatically generates CNC projects for WebAccess/SCADA software



WebAccess/MCM

WebAccess/MCM

Machine Condition Monitoring Software

- Dynamic signal acquisition and analysis
- Real-time monitoring and alarm notification
- Provides feature extraction algorithms for data processing
- Remote management for distributed monitoring solutions
- Integrated with WebAccess/SCADA
- Ensures easy setup without additional programming



WebAccess/NMS

WebAccess/NMS

Network Management System

- Cross-browser compatible
- Online Google Maps and offline OpenStreetMap support
- Supports all Advantech Ethernet-based products
- Dynamic connectivity indication
- Automatically discovers and diagrams network topology
- PoE, ring, wireless, cellular connection indication



WISE-PaaS/VideoCMS

WISE-PaaS/VideoCMS

Video Content Management

- Centralized management and deployment of video sources
- Configurable video analysis modules, generated events, and attributed data to facilitate an intelligent security system
- Powerful SDK integration for expansion to various application scenarios



WISE-PaaS/EnSaaS

WISE-PaaS/EnSaaS

Platform for IoT Cloud Services

- Connect, monitor, and manage millions of IoT assets
- Managed SQL, NoSQL, and time-series databases for app developers
- Visualization dashboard for deriving actionable insights
- Quickly create powerful cloud apps using a fully managed platform

iFactory and M2I Solution-Ready Packages

Designed for Smart Factory and IoT Applications



Industry 4.0

In response to increasing demand for Industry 4.0 technology, Advantech has aimed to create data-driven solutions that enable intelligent manufacturing solutions that are more flexible and responsive. To highlight this, iFactory solutions are targeted at markets that seek to utilize smart factories, such as in food and beverage, electronics manufacturing, auto assembly, footwear, and energy and environment industries; whereas M2I/ CNC solutions are designed to enhance CNC intelligent machine monitoring.

Process Visualization Solutions



SRP-FPV240

Enhanced Productivity and Reduced Downtime with Centralized Management

- Centralized applications and client management
- Enables superior visualization for multi-tasking
- Reduced downtime and easy maintenance of thin clients

SRP Package:

1 x UNO-2362G-T2AE, ACP-Ready Thin Client,
HDMI x 1, DP x 1



SRP-FPV220

Process Data Charting and Analysis for Production Optimization

- Shop-floor information visualization
- Mobile production monitoring with dashboards
- Easily integrated with MES via open APIs

SRP Package:

1 x WebAccess/ SCADA, 1 x UNO-2483G,
1 x WISE-4012

Equipment Connectivity Solutions



SRP-M2i240-A

Easy Programming for Real-Time Machine Control

- IEC 61131-3-compliant
- Dual Fieldbus for real-time data acquisition
- EtherCAT for real-time soft motion control

SRP Package:

1 x CODESYS V3.5 SP8, 1 x UNO-1372G,
1 x iDoor CANOpen



SRP-FEC220

Machine Data Acquisition for Monitoring and Optimization

- 100% data acquisition
- Flexible protocol conversion
- Easily connect OT and IT

SRP Package:

1 x WebAccess/ HMI, 1 x UNO-2271G,
1 x ADAM-6060

M2I/CNC Solution



SRP-M2i600

CNC Processing Efficiency Monitoring and Tool Wear Management

- Easy protocol conversion for all major CNC controllers
- A range of CNC operation and management functions
- Visual and web-based dashboards

SRP Package:

1 x WebAccess/ CNC, 1 x UNO-1372G-J

Energy & Environment Solution-Ready Packages

Accelerating Cloud-enabled IoT and Smart City Applications



Given the growing public concern regarding energy and the environment, Advantech's E&E SRPs have an industrial IoT focus on the processes of sensing, control monitoring, and remote communication. By combining these technologies with WebAccess and WISE-PaaS, both of which are reliable tools for information integration and data analysis, our E&E M2I and SRPs solutions can be widely utilized in various E&E industries.

Central Management



WebAccess/SCADA

Data Server

Application Server

E&E SRP-010 Basic System Series

- Highly stable and reliable industrial-grade server
- Powerful processing performance based on the Intel® Xeon® E5 CPU
- Extended hardware and software architecture for flexible scalability

Field Sites:

Energy management, solar power management, water management, and indoor air quality solutions



Multi-Display System

Display Server

E&E SRP-100 Situation Room Series

- Multi-screen integration for creating a highly visualizable control room
- Ruggedized fanless industrial display server
- HD display quality

Field Sites:

Energy management, solar power management, and water management solutions

Field Site Solutions



WebAccess/EMS

E&E SRP-400

Energy Management Solution

- Data acquisition sensors and meters
- Customized energy consumption reports
- Built-in formula for energy management

SRP Package:

1 x EMS, 1 x WebAccess/ SCADA w/ 5000 tags, 1 x UNO-2483G, 1 x ECU-1251



WebAccess/SPMS

E&E SRP-410

Solar Power Management Solution

- Hierarchical visualization and complete management
- System stability guaranteed by seamless integration
- Precise and effective data acquisition

SRP Package:

1 x SPMS, 1 x WebAccess/ SCADA, 1 x ECU-4784, 10 x ECU-1251



WebAccess/SCADA

E&E SRP-WMS420

Water Management Solution

- Monitoring and analysis for operational efficiency
- Reliable and stable seamless integration
- Data acquisition for different equipment types

SRP Package:

1 x WMS, 1 x WebAccess/ SCADA w/ 20000 tags, 1 x ECU-4784, 1 x ADAM-3600

Machine to Intelligence (M2I) Solutions



WISE-PaaS/EdgeLink

E&E SRP-401

On-Site Energy Data Acquisition

- Connect to field devices with multi-protocol support
- Smart meter for energy data acquisition
- Data store and forward

SRP Package:

ECU-1152TL, WISE-M502



WISE-PaaS/EdgeLink

E&E SRP-411

Distributed Solar Power Data Acquisition

- One slot for wireless expansion
- Built-in data mapping for solar power inverters
- Data store and forward

SRP Package:

ECU-1251TL, WISE-M502



WISE-PaaS/EdgeLink

SRP-EM2i450

Distributed Equipment M2I SRP

- Conditional maintenance
- Real-time monitoring of operating status
- Cloud connectivity via MQTT

Applied devices:

Water pumps, power generators, and HVAC

Machine Automation

Integrated Soft Computing to Enable Intelligent Machines



Advantech has independently developed a unique SoftMotion kernel and innovative GigE Vision offload engine that uses field programmable gate arrays (FPGA), digital signal processing (DSP) units, and Arm® processors as the core-computing platform. In addition to providing versatile solutions, Advantech's PCI and PCIe motion cards and all-in-one systems also deliver optimum motion performance and fulfill the needs of OEM machine makers and system integrators. Our new motion solutions also support EtherCAT for distributed, deterministic motion and I/O capability. MAS and VPS are our new SRP offerings for motion control and machine vision, enabling customers to continuously advance their technologies.

EtherCAT Solutions



High Precision

- Motion master cycle time: Up to 250 μ s for 6/ 10/ 16/ 32/ 64 axes
- I/O master cycle time: 200 μ s

Real Time

- Embedded RTOS for real-time motion control
- User-friendly basic scripts for stored procedures

Ease of Use

- Unified API for rapid development
- SoftMotion Engine for vertical applications

Integration

- Supports EtherCAT servo/ stepping motors
- Pulse train control via EtherCAT motion modules
- Automatic connection of EtherCAT slaves throughout a network

Structure



PC-Based Programmable Motion Control Solutions



Open Platform Multi-Axis Controller

- Seamlessly integrated motion control, machine vision, and I/O components
- Open standard interface for communication and database connectivity

One Programming Tool – Motion Studio

- Easy to program with BASIC language, thus shortening the learning curve
- Extensive debugging tools for machine control applications
- Fast to learn, program, and service

Real-Time SoftMotion Kernel

- Up to 6-axis interpolation, trajectory planning, and tracking
- Rich motion functions for XYZ table and SCADA control

Structure



Automatic Vision Inspection Solutions



Configurable Application Software

- Easy-to-configure and deploy applications without programming
- Intuitive GUI shortens the learning curve
- Industrial-grade and compact design
- Fanless system w/ IP40 rating
- 7-year product lifetime
- Palm-sized (137 x 50 x 118 mm)

Versatile I/O for the Factory Floor

- PWM lighting control
- Debounce filter w/ interrupt on digital input
- Compliant with GigE Vision cameras

Structure



Power and Energy Solutions

Ensuring Reliable Solutions in the Changing Energy Market



To ensure safety and reliability by strengthening the energy management and monitoring of distributed energy stations, renewable energy sources, grid infrastructure, and manufacturing consumption, Advantech offers the ECU series of automation controllers, gateways, and data acquisition modules. These units are IEC 61850-3-compliant, have a robust design, and offer such features as wireless connectivity, multi-protocol support, and WebAccess integration to provide a flexible and robust open platform for convenient secondary development. By leveraging the extensive range of Advantech energy technology and solutions, users can manage tasks economically and efficiently despite the increasing complexity and dynamic nature of power and energy markets.

Automation Platforms



NEW

ECU-4784 Series

TUV IEC-61850-3-Certified Power Automation Computer

- Intel® Xeon® quad-core E3-1505L processor (2.0 GHz) w/ 16 GB of DDR4 ECC RAM
- Intel® Core™ i7 4650U/ Core™ i3 4010U/ Celeron® 2980U processor w/ 8 GB of DDR3L RAM
- 8 x 10/ 100/ 1000MB LAN, 2 x RS-232, 8 x RS-232/ 422/ 485 serial ports
- 2 x I/O expansion slots
- Supports iCDManager/ VT-D/ AMT/ TPM



NEW

ECU-4685

IEC-61850-3-Compliant Power Automation Computer w/ Intel® Celeron® 2980U Processor

- Intel® Celeron 2980U processor (1.6 GHz) w/ 4 GB of DDR3L RAM
- 6 x 10/ 100/ 1000MB LAN, 2 x RS-232, 8 x RS-232/ 485 serial ports
- 2 x relay output, 1 x IRIG-B
- 1 x mini-PCIe slot (full size)

XPCIe Cards



ECU-P1524PE (HSR+PRP)

2-Port SFP Gigabit Ethernet card w/ HSR+PRP support

- 2 x SFP (1000 Mbps Base-X)
- 2 x SFP (HSR+PRP, selection via jumper)
- Wide operating temperature range (-25~70°C)



ECU-P1761 (Digital I/O)

4-ch Isolated Digital Input/ 4-ch Isolated Relay Output Card w/ IRIG-B

- 4 x digital input (wet contact)
- 4 x relay output (Form C)
- 1 x IRIG-B
- Wide operating temperature range (-25~70°C)



ECU-P1628D/ 1618D (COM)

8-Port Isolated/ Non-Isolated RS-232/ 422/ 485 Card

- RS-232: 50~115.2 kbps (max.)
- RS-422/ 485: 50~921.6 kbps (max.)
- 2500 VDC isolation (ECU-P1628D)
- Wide operating temperature range (-20~70°C)

RISC-Based Gateways



ECU-1251

IEC-61850-3-Compliant Cortex® A8 Power Automation Gateway w/ 2 x LAN, 4 x COM

- Arm® Cortex® A8 800-MHz processor w/ 256 MB of DDR3L RAM
- 2 x 10/ 100 MB LAN, 4 x RS-232/ 485 serial ports
- 1 x mini-PCIe slot for wireless expansion
- Wide operating temperature range (-40~70°C)



ECU-1152

IEC-61850-3-Compliant Cortex® A8 Power Automation Gateway w/ 2 x LAN, 6 x COM

- Arm® Cortex® A8 800-MHz processor w/ 512 MB of DDR3L RAM
- 2 x 10/ 100 MB LAN, 6 x RS-232/ 485 serial ports
- 1 x mini-PCIe slot for wireless expansion
- Wide operating temperature range (-40~70°C)



NEW

ECU-4553

IEC-61850-Compliant Cortex® A8 Power Automation Gateway w/ 4 x LAN, 16 x COM

- ARM® Cortex® A8 800-MHz processor w/ 1 GB of DDR3L RAM
- 4 x 10/ 100MB LAN, 16 x RS-232/ 485 serial ports
- 2 x CAN 2.0b, 1 x IRIG-B
- Wide operating temperature range (-40~70°C)

Intelligent Transportation Systems

Total Solutions Build Up Modernized Infrastructure



With a decade of successful experience, Advantech has dedicated resources to designing and developing new products designed for the transportation industry. These products support both railway and roadway applications, including railway automatic fare collection, wayside control, rolling stock, city traffic management, highway management, transport hubs, and more. Our mission is to enable intelligent transportation systems, which also helps us fulfill our vision of creating and delivering smart city technologies.

Rugged-design Computer Platform



EN 50155

ITA-5831

EN 50155-Certified Compact Fanless System

- Intel® Core™ i7-6822EQ platform with QM170
- Satisfies EN 50155 Tx (-40~70°C) and IEC 61373 body mount Class B standards
- Compliant with EMC standard EN 50121-3-2 for rolling stock apparatus
- Ruggedized communication and power port connectors (M12)
- Supports easy-swap storage and I/O modules



EN 50155

ITA-5231

EN 50155-Certified Fanless System

- H-series, 6th generation Intel® Core™ i3/i5/i7 platform with QM170
- Satisfies temp. standards for EN 50155 TX (-40~70°C) and IEC 61373 body mount class B
- Compliant with EN 50121-3-2/ EN 50121-4 on EMC compatibility
- Ruggedized connectors (M12) used for communication and power ports
- Supports easy-swap storage and I/O modules

Display System



ARS-P3800

EN50155-Certified 38" Railway Panel PC w/ AMD® Embedded G-Series Processor

- 38" LCD panel w/ 1920 x 540 resolution
- 1 x GbE (M12), 1 x USB 2.0 (M12)
- Certificated with EN50155 T1 (-25~55°C), IEC 61373 Class B, EN 45545
- IP54 rating ensures protection against dust/ water ingress
- Fanless, anti-shock and anti-vibration design

Process Visualization Solutions



ITA-1711

Intel® Celeron™ J1900 Fanless Compact System

- 4 GB of DDR3 onboard RAM w/ optional NVRAM
- 2 x LAN, 6 x USB, 14 x COM, and 1 x USB 3.0 ports
- Replaceable secondary display (VGA 2/ DVI-D/ LVDS)
- Supports dual outputs of full HD resolution video
- Serial RS-232/ 422/ 485 ports support with automatic flow control



EN 50121-4

ITA-2231

EN50121-4-Compliant 2U Fanless System

- Intel® 6th Gen Core™ i7 processor w/ 16 GB of DDR4 RAM (up to 32 GB via DIMM expansion)
- Compliant with EN 50121-4 EMC standard for railway applications
- Provides 3 x ITA-EM modules, 1 x PCI104, and 1 x M.2 slots for expansion
- Wide operating temperature range (-25~60 °C)
- Supports single/ dual power modules

Touch Panel PC



EN 50155

NEW

ITA-8120

EN50155-Certified 12.1" Railway Panel PC with Intel® Atom™ X Series Processor

- 12" LCD touch panel w/ 1024 x 768 resolution
- 2x GbE (M12), 1x USB 2.0 (M12), 2x RS-422/ 485 (M12)
- Wide voltage input range: 24/ 48/ 72/ 110 VDC (±40%)
- Compliant with EN50155 T3 (-25~70°C), IEC 61373 Class B, and EN 45545

EN50155 Switches



EKI-9500 Series

28/ 20/ 16/ 12/ 10/ 8-Port EN50155 Managed Switch w/ PoE Support

- EKI-9520: 16 x M12 D-coded/ X-coded PoE ports + 4 x M12 X-coded w/ bypass
- EKI-9528: 16 x M12 D-coded/ X-coded PoE ports + 4 x M12 X-coded w/ bypass + 8 x M12 D-coded/ X-coded ports
- Wide power input range (24/ 36/ 48/ 72/ 96/ 110 VDC)



EKI-9512E-4EETB

EN50155 Train Router for Rolling Stock Backbone

- 8 x 10/ 100 Mbps M12 D-coded + 4 x 10/ 100 Mbps M12 D-coded w/ bypass
- TTDP (IEC-61375-2-5)
- Wide power input range (24/ 36/ 48/ 72/ 96/ 110 VDC)

Managed Ethernet Switch for Road Transportation



EKI-7700 Series

Industrial Managed Switch

- X-Ring Pro redundancy (recovery time < 20 ms)
- IXM for rapid deployment
- PoE/ PoE+ models available
- Compliant with EN50121-4 and NEMA TS2

Intelligent Systems and Platforms

Infrastructure for the IoT



With a diverse range of innovative technologies including cloud computing (industrial and video servers), edge computing (fanless, slim, portable devices), and high-performance embedded systems, Advantech's industrial cloud services and system design-to-order services (DTOS) transform embedded systems into intelligent systems equipped with smart, secure, energy-saving features. Our intelligent systems are designed specifically for vertical markets in intelligent transportation, factory automation/ machine automation, cloud infrastructure, and intelligent video application sectors.

Industrial Computers



ACP-2020

2U Rackmount Short Depth Chassis for ATX/ MicroATX Motherboards

- 398-mm short-depth 2U rackmount chassis
- Supports microATX single-processor motherboards
- 350-W single or 500-W redundant power supply
- Two internal 2.5" or hot-swap drive bays
- Intelligent system module for smart fan, self-diagnosis, and remote management



IPC-631

4U Front I/O Short Depth Rackmount Chassis for ATX/ Micro-ATX Motherboards

- 350-mm short-depth rackmount chassis
- Supports microATX single-processor motherboards, CPU TDP up to 120 W
- 500-W single or redundant power supply
- All I/O ports, buttons, LEDs, drive bays, and AC inlet on the same side
- PWM-controlled smart fan for minimal noise



ACP-4340

4U Rackmount Chassis w/ 4 x Hot-Swap Drive Trays

- Supports a PICMG backplane with up to 14 slots or an ATX/ microATX motherboard
- Shock-resistant disk drive bay holds 4 x hot-swap 3.5" and 2.5" SATA disk trays, 1 x slim optical disk drive, and 1 x 2.5" internal drive
- 2 x front USB 3.0 ports
- Front-accessible system fan without opening top cover for easy maintenance
- Intelligent system module for smart fan control, self-diagnosis, and remote management

Machine Vision Systems



AIIS-3400U/ P

Compact Vision System, Intel® 6th/ 7th Gen Core™ i CPU, 4-ch Camera Interface for GigE PoE or USB 3.0

- Intel® 6th/ 7th Gen Core™ i CPU (LGA1151)
- AIIS-3400P: 4-ch GbE PoE
- AIIS-3400U: 4-CH USB 3.0 w/ dedicated controller

Modular Industrial Computer



MIC-7700

Intel® 6th/ 7th Gen Core™ i Desktop Compact Fanless System

- Intel® 6th/ 7th Gen Core™ i CPU socket-type (LGA1151) w/ Intel® Q170/ H110 chipset
- VGA and DVI output
- 2 x GigaLAN and 8 x USB 3.0
- 2 x RS-232/ 422/ 485 and 4 x RS232 serial ports
- 1 x 2.5" HDD/ SSD, 1 x CFast, and 1 x mSATA



MIC-7420

Compact Fanless System with Intel® 6th Gen Core™ i Processor

- Intel® 6th Gen Core™ i7/i3 (BGA type) processor w/ Intel® QM170 chipset
- 8 GB of DDR4 memory (up to 24 GB)
- 2 x DVI, 2 x GbE LAN, 8 x USB ports
- 2 x PCIe x4/ 2 x PCI expansion slots
- 2 x 3.5"/ 2.5" HDD and 1 x M.2



Storage / Hybrid Server



NEW

SKY-5240

2U 4-Node Intel® Xeon® Scalable Series Hybrid Server

- Cutting edge technologies with Intel Xeon Scalable Family and support up to 24 DIMMs per Node
- Flexible I/O options, easy to upgrade to 1G/10G/40G/100G LAN via daughter boards
- Supports NVMe, SAS 12G, and SATA 6G for flexible storage arrangement
- Featured with Platinum redundant power supply, providing up to 96% high efficiency
- Supports two additional PCIe x16 expansion cards

Tower Chassis

**HPC-5000**

Small Tower Chassis for MicroATX/Mini-ITX Motherboards

- Supports microATX/ mini-ITX motherboards
- Supports 2 x 3.5" or 1 x 3.5" and 1 x 2.5" internal HDDs
- 2 x USB 2.0 and 2 x USB 3.0 ports on the front panel
- Supports up to 4 FH/ FL (10.5") expansion slots
- Supports 300/ 500-W high-efficiency single ATX power supply
- Replaceable air filter to protect against dust ingress
- Under 23 dB(A) in idle mode (tested with ASMB-585 in smart fan mode)

GPU Server



NEW

SKY-6400

4U Rackmount Intel® Xeon® Scalable Series GPU server

- Supports DDR4 REG 2666/ 2400/ 2133/ 1866-MHz DIMM (up to 384 GB)
- Provides 4 expansion slots
- PCIe x16 double-deck card + 1
- PCIe x8 single-deck FH/ FL card
- PSU: 2000-W 1+1 redundant power supply with 80 PLUS Platinum certification
- IPMI function support for remote management
- Dual Intel® Xeon® scalable series processor

Video Capture Cards

**DVP-7011UHE**

4K Capture Card

- 1-ch 4K HDMI 2.0 video input with H.264 software compression
- 60/ 50 fps (NTSC/ PAL) at up to 4096 x 2160p for recording and display
- PCIe x 4 host interface
- Low profile size

**DVP-7635HE**

4-ch AHD Capture Card

- 4-ch AHD/ CVI/ TVI/ composite (CVBS) hardware compression
- 30/ 25 fps (NTSC/ PAL) at up to 1920 x 1080p for recording and display per channel
- PCIe x 4 host interface
- Supports watchdog function

**DVP-7011MHE**

M.2 DVI/ VGA/ HDMI Capture Card

- 1-ch HDMI/ DVI-D/ DVI-A/ YPbPr channel video inputs with H.264 software compression
- 30/ 25 fps (NTSC/ PAL) at up to full HD for recording and display
- PCIe M.2 (B/ M) host interface

Industrial Motherboards

**AIMB-705**

LGA1151 6th/ 7th Gen Intel® Core™ i7/i5/i3/ Pentium ATX with DVI/ VGA, DDR4, SATA III, USB 3.0, and 6 x COM

- Intel® Core™ i7/i5/i3/Pentium® processor w/ H110 chipset
- Dual-channel (non-ECC) DDR4 RAM at 1866/ 2133 MHz (up to 32GB)

**AIMB-785**

LGA1151 6th/ 7th Gen Intel® Core™ i7/i5/ i3/Celeron/ Pentium ATX with 2 x DVI VGA, DDR4, and SATA III, USB 3.0, and 6 x COM

- Intel® Core™ i7/i5/i3/Celeron®/Pentium® processor w/ Q170 chipset
- Dual-channel (non-ECC) DDR4 at 1866/ 2133 MHz (up to 64 GB)
- Supports triple display (VGA/ 2 DVI-D)

**PCE-3029**

LGA1151 6th/ 7th Gen Intel® Core™ i7/i5/i3 Half-Sized SHB with DVI/ VGA, DDR4, SATA III, mSATA, USB 3.0, and 2 x COM

- Intel® Core™ i7/i5/i3/Celeron®/Pentium® processor w/ H110 chipset
- Dual-channel (non-ECC) DDR4 at 1866/ 2133 MHz (up to 32 GB)

Slot Single-Board Computers

**PCE-5029**

LGA1151 6th/ 7th Gen Intel® Core™ i7/i5/i3 Full-Sized SHB with DVI/ VGA, DDR4, SATA III, USB 3.0, and 2 x COM

- Intel® Core™ i7/i5/i3 processor w/ H110 chipset
- Dual-channel (non-ECC) DDR4 at 1866/ 2133 MHz (up to 32 GB)

**PCE-5129**

LGA1151 6th/ 7th Gen Intel® Core™ i7/ i5/i3 Full-Sized SHB with 2 x DVI VGA, DDR4, SATA III, USB 3.0, 2 x COM, M.2, and AMT

- Intel® Core™ i7/i5/i3 LGA1151 processor w/ Q170 chipset
- Dual-channel (non-ECC) DDR4 at 1866/ 2133 MHz (up to 32 GB)
- Supports SW Raid 0/ 1/ 5/ 10
- Supports triple display (VGA/ 2 DVI D)
- Compliant with PICMG 1.3

**PCE-7129**

LGA1151 6th and 7th Gen Intel® Xeon® / Core™ i7/i5/i3/Pentium® LGA1151 System Host Board with DDR4, SATA 3.0, USB 3.0, M.2, Dual GbE, and Triple Display

- Intel® Xeon® E3-1200v5/ Core™ i7/i5/i3 LGA1151 processor w/ C236 chipset
- Dual-channel (non-ECC) DDR4 1866/ 2133 MHz (up to 32 GB)
- Supports triple display (VGA/ 2 DVI D/ DP)

Embedded Automation Computers

Seamless Cloud Connection and Transmission for Smart Factories



Equipped with advanced communication capabilities and integrated iDoor technology, UNO systems can serve as intelligent IoT gateways for smart factories to ensure convenient cloud connectivity. These units offer scalable computing power for field site control and can support a diverse range of protocols for various PLC models with the integration of Advantech's WebAccess/ HMI software. The modularized design allows for flexible configuration and future expandability, making UNO systems ideal industrial computing solutions for smart factory operations.

Modular Box Platforms



NEW

UNO-2271G

Intel® Atom™ Pocket-Sized Smart Factory Edge Gateway

- Intel® Atom™ E3815 processor, w/ 4 GB of DDR3L onboard RAM
- Modular design for flexible expansion
- Built-in 32 GB of eMMC storage
- Versatile mounting options (DIN rail/ pole/ VESA/ stand)

Optimized UNO UNO-2271G-E21AE

- 2 x GbE, 1 x USB 3.0, 1 x HDMI
- Supports additional second stack expansion for iDoor (UNO-2372G-EKAE)

Universal UNO UNO-2271G-E22AE

- 2 x GbE, 1 x USB 3.0, 1 x HDMI, 3 x USB 2.0

Customized UNO UNO-2271G-E23AE

- 2 x GbE, 1 x USB 3.0, 1 x HDMI, 2 x RS-232/ 422/ 485



NEW

UNO-2372G

Intel® Atom™ Small-Sized Smart Factory Data Gateway

- Intel® Atom™ E3845/ Celeron J1900 processor w/ 4 GB of DDR3L RAM
- Modular design for flexible expansion
- Versatile mounting options (DIN rail/ VESA/ stand)

Optimized UNO UNO-2372G-E021AE

- 2 x GbE, 1 x USB 3.0, 3 x USB 2.0, 1 x HDMI, 1 x DP
- Supports additional second stack expansion for iDoor (UNO-2372G-EKAE)

Universal UNO UNO-2372G-E022AE

- 2 x GbE, 1 x USB 3.0, 3 x USB 2.0, 1 x HDMI, 1 x DP
- 2 x iDoor expansion slots



NEW

UNO-2484G

Intel® Core™ i7/i5/i3 Regular-Sized, High-Performance Modular IPC

- Intel® Core™ i7/i5/i3 processor w/ 8 GB of DDR4 RAM
- Ruggedized and cableless design with lockable I/O
- TPM 2.0 technology for cyber security
- Versatile expansion module for different applications

Optimized UNO UNO-2484G-6731AE

- 4 x GbE, 4 x USB 3.0, 1 x HDMI, 1 x DP, 4 x RS-232/ 422/ 485
- Supports additional second stack expansion: UNO-2484G-EKAE (4 x iDoor installation); UNO-2484G-S2AE (dual external accessible storage)

Universal UNO UNO-2484G-6732AE

- 4 x GbE, 4 x USB 3.0, 1 x HDMI, 1 x DP, 4 x RS-232/ 422/ 485, 4 x iDoor expansion slots

Customized UNO UNO-2484G-6732H5AE

- 4 x GbE, 4 x USB 3.0, 4 x USB 2.0, 5 x HDMI, 1 x DP, 4 x RS-232/ 422/ 485

Control Cabinet PCs



UNO-1252G/ 1251G

Micro-Sized DIN-Rail Industrial IoT Gateway

- Intel® Quark™/ TI Cortex®-A8 processor with 512/ 256 MB of RAM
- UNO-1252G: 2 x LAN, 2 x USB, 2 x mPCIe, 2 x COM, 8 x DI/O, 1 x microSD, 1 x SIM, 1 x iDoor, Ycoto Lynux
- UNO-1251G: 2 x LAN, 1 x USB, 1 x mPCIe, 3 x COM, 1 x CAN, 2 x microSD, 1 x microSIM, WEC7
- Programmable OLED display for indicating system status



NEW

UNO-1372GH/ UNO-1372G-J

Intel® Atom™/ Celeron Small-Sized DIN Rail Controller

- Intel® Atom™ E3845/ Celeron J1900 processor w/ 4 GB of DDR3L RAM
- UNO-1372GH: 3 x GbE, 2 x mPCIe, 2 x USB 2.0, 1 x USB 3.0, 1 x RS-232, 1 x RS-422/ 485, 1 x VGA, 1 x HDMI, 8 x DI/O, 1 x Line-out, 1 x iDoor, CID2-certified
- UNO-1372G-J: 2x GbE, 2 x mPCIe, 3 x USB 2.0, 1 x USB 3.0, 4 x RS-232/ 422/ 485, 1 x DP, 1 x HDMI, 8 x DI/O, 1 x iDoor
- Dedicated TPM2.0 onboard for hardware security (UNO-1372G-J)



UNO-1483G

Intel® Core™ i3 Standard-Sized DIN-Rail Controller

- 4th Gen Intel® Core™ i3 processor (up to 1.7 GHz) w/ 8 GB of DDR3L RAM
- 4 x GbE, 3 x mPCIe, 1 x PCIe x1, 2 x USB 2.0, 2 x USB 3.0, 1 x RS232, 2 x RS422/ 485, 1 x VGA, 1 x DP, 8 x DI/O, 1 x line out, 1 x iDoor
- Redundant power and easy-access swappable RTC battery



UNO-3283G/ 3285G

Intel® Core™ i Wall Mount Automation Computer

- 6th Gen Intel® Core™ i processor w/ 8 GB of DDR4 RAM
- 2 x GbE, 6 x USB 3.0, 2 x RS-232/ 422/ 485, 1 x DVI-I, 1 x HDMI, 1 x CFast 1 x iDoor, 2 x mPCIe (UNO-3283G: 2 x PCI/ PCIe, UNO-3285G: 4 x PCI/ PCIe)
- Dual hot-swappable HDD/ SSD slots with thumb screws for easy maintenance
- Redundant power input



UNO-3382G/ 3384G

Intel® Core™ i7/Celeron® Book Mount Automation Computer

- 4th Gen Intel® Core™ i7/Celeron® processors with 4/ 8 GB of DDR3L RAM
- 2 x GbE, 2 x USB 2.0, 2 x USB 3.0, 1 x RS-232/ 422/ 485, 1 x DP, 1 x HDMI, 2 x mPCIe, 1 x CFast, 2 x iDoor (UNO-3384: 2 x PCI/ PCIe)
- Dual hot-swappable HDD/ SSD slots with thumb screws for easy maintenance




IP67

UNO-3483G

Intel® Core™ i7 Enclosure Mount Automation Computer

- 3rd Gen Intel® Core™ quad-core i7-3612QE processor (up to 2.1 GHz) w/ 8 GB of DDR3L RAM
- 2 x GbE, 2 x USB 2.0, 2 x USB 3.0, 1 x RS-232 (pin header), 1 x RS-422/ 485 (pin header), 1 x VGA, 1 x HDMI, 1 x PCIe x4, 3 x mPCIe, 2 x iDoor
- Dual hot-swappable HDD/ SSD slots with thumb screws for easy maintenance

iDoor Modules

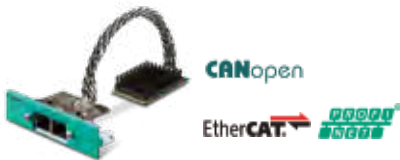

Industrial Fieldbus PCM-26 Series

Industrial Fieldbus iDoor modules support common automation protocols

- CANOpen
- PROFIBUS
- PROFINET
- EtherCAT
- EtherNet/ IP
- Sercos 3
- POWERLINK
- CC-Link IE



Wireless Communication PCM-24S Series

Wireless communication iDoor modules enhance connectivity for industrial IoT

- Wi-Fi/ Bluetooth
- 3G/ GPS
- LTE/ GPS
- Sigfox
- LoRa
- Sub-1G



Industrial I/O and Peripherals PCM-23/ 24/ 27/ 29 Series

Industrial I/O and peripheral modules enable flexible I/O expansion

- RS232/ 422/ 485
- MRAM
- USB 3.0
- Audio
- Digital I/O
- CFast slot
- PoE
- IO-Link
- GigaLAN
- USB dongle
- TPM

Intelligent HMI

Leading HMI Innovations for Smart Factories



As a leading promoter of Industry 4.0, Advantech offers a diverse range of HMI products equipped with iDoor technology, including high-performance control panels, low-power industrial thin clients, web browser terminals, and industrial monitors. For vertical markets such as railway transportation and food and beverage industries, we also provide reliable domain-focused products with IP69K, C1D2, and EN50155 certification. Advantech has developed a new generation of modular solutions for a diverse range of configurations to meet specific usage requirements, offering customers a quick time to market and high level of expandability for Industry 4.0 applications.

Modular Industrial Panel PCs

Preconfigured Modular Systems



TPC-5000 Series

Modular 12"/ 15"/ 17"/ 18.5"/ 21.5".
LED LCD w/ 6th Gen Intel® Core™ i7/i3/
Celeron® Multi-Touch Panel Computer

- Intel® Core™ i7-6600U processor with 8 GB of DDR4 SODIMM
- Various front panel sizes that support either PCT touch for multi-touch control or 5-wire resistive touch
- 3 x GbE, 1 x full-sized mini-PCIe with iDoor technology and 1 x half-sized PCIe slot



TPC-2000 Series

Modular 12"/ 15"/ 17"/ 18.5"/ 21.5"
LED LCD w/ Intel® Atom™ Industrial
Thin Client

- Intel® Celeron® J3455 Quad-Core Processor (1.50 GHz) + 4 GB of DDR3L SODIMM
- Various front panel sizes that support either PCT touch for multi-touch control or 5-wire resistive touch
- Supports NFC, Wi-Fi, and Bluetooth wireless communication, as well as iDoor technology



FPM-7000 Series

Modular 12/ 15/ 17/ 18.5/ 21.5 Full HD
Industrial Monitor

- Supports dual displays and control with picture-in-picture functionality
- Module-in-module design with customizable I/O interface
- iLINK technology enables long-distance (up to 100 m) one-to-one/ one-to-many (up to 4) data transmissions

Standalone Modules

Box Module



TPC-B500-6C2AE

Intel® Celeron® 3955U,
4 GB of DDR4 RAM

TPC-B500-6C2AE

Intel® i3-6100U,
8 GB of DDR4 RAM



TPC-B200-J12AE

Intel® Celeron® J3455
1.50 GHz, 4G of DDR3L RAM

TPC-B200-E12AE

Intel® Atom® 1.8GHz,
4G of DDR3L RAM



FPM-B700-AE

Modular monitor box w/ 2 x I/O slots

Panel Module



FPM-D12T-AE

12.1" XGA



FPM-D15T-AE

15" XGA



FPM-D17T-AE

17" SXGA



FPM-D18W-AE

18.5" HD



FPM-D21W-AE

21.5" Full HD

High Performance Control Panels



TPC-1x82 Series

12"/ 15"/ 17" TFT LED LCD

Intel® Core™ i3 Touch Panel Computer

- Intel® Core™ i3-5010U/ 4010U (1.7/ 2.1 GHz) w/ 4 GB of DDR3L SDRAM + 5-wire resistive touch screen
- Expandable system I/O, isolated digital I/O, Fieldbus, and communication via iDoor technology
- PCIe and mini-PCIe expansion support
- Supports 2 x USB 3.0 and HDMI ports for independent displays



TPC-1x81WP Series

15.6"/ 18.5" TFT LED LCD

Intel® Core™ i7/i3 with PCT Multi-Touch Panel Computer

- 7H surface hardness glass widescreen with PCT multi-touch control, IP66 rating, and true-flat design
- Expandable system I/O, isolated digital I/O, Fieldbus, and communication via iDoor technology
- Built-in ikey and Home key provide an intuitive user interface
- Supports USB 3.0 and HDMI for independent displays

Industrial Thin Clients



TPC-xx51T Series

5.7"/ 6.5"/ 12.1"/ 15"/ 17" TFT LED LCD

Intel® Atom™ Dual-Core Thin Client Panel Computer

- Intel® Atom™ dual-core E3827, 1.75 GHz, processor with 4 GB of DDR3L SDRAM (Optional Intel® Celeron™ quad-core J1900 processor)
- Wide operating temperature (-20 ~ 60 °C)
- IP66-rated front panel with durable true-flat 5-wire resistive touchscreen
- Supports iDoor technology (TPC-1251T-EHKE required)



TPC-xxWP Series

10.1"/ 15.6" TFT LED LCD Intel® Atom™ Dual-Core Thin Client Panel Computer

- Intel® Atom™ dual-core E3827 (1.75 GHz) w/ 4 GB of DDR3L SDRAM
- Wide operating temperature range (-20~55°C)
- 7H surface hardness glass widescreen with PCT multi-touch control, IP66 rating, and true-flat design
- Supports iDoor technology (TPC-1251T-EHKE required)



TPC-1840WP/ TPC-2140WP

18.5"/ 21.5" TFT LCD Multi-Touch Panel Computer with AMD Dual-Core Processor

- AMD dual-core T56E (1.65 GHz) w/ independent GPU
- 16:9 WXGA/ FHD TFT LED LCD display with PCT multi-touch control
- Built-in function and home key buttons provide an intuitive user interface
- Easy maintenance Cfast/ HDD/ mini-PCIe components

Web Browser Terminals



WebOP-3000 Series

7"/ 10.1"/ 12" Cortex™-A8 Operator Panel

- Microsoft Windows Embedded CE 6.0
- Backup memory frame in 128 KB (64 words) without battery
- Wide operating temperature range (-20~60°C)
- Flat-sealed front panel with IP66 rating



WebOP-2000 Series

4.3"/ 7"/ 10.1" WSVGA Operator Panel

- 65,536 colors TFT LCD, Arm9-based CPUs
- Front panel flat-sealed with IP66 rating
- Low power consumption (10 W)
- Supports over 400 PLC communication protocols

Domain-Focused Panel PCs



SPC Series

All-Around IP66-Rated 18.5"/ 21.5" Stationary Panel w/ Intel® i3/i5/i7/AMD® Dual-Core Processor

- Intel® Core™ i3-4010U/ AMD G-series T56N processor
- 7H surface hardness glass widescreen with true-flat design, all-around IP66 rating VESA mount support
- Waterproof M12 I/O: 1 x RS-232, 1 x USB, and 2 x LAN (customization is allowed)
- Winner of the 2013 iF product design award



IPPC-5211WS

IP69K-Rated 21.5" TFT LED LCD w/ PCT Touch Panel

- Intel® Celeron® quad-core J1900 (2 GHz)
- 21.5" full HD TFT LED LCD display
- IP69K rating with corrosion-proof stainless steel housing
- Supports detachable accessories for various applications

Panel PCs



NEW

PPC-6000C Series

15"/ 17"/ 19" 6th Gen Intel® Core™ i7/i5/i3 Panel PC w/ Selectable Mini-ITX Motherboard

- 6th Gen Intel® Core™ i, up to 45W TDP (socket type)
- True-flat, IP65-rated, front bezel with resistive or optional PCAP touchscreen
- Selectable mini-ITX motherboard for diverse requirements
- 2 x expansion slots (1 x PCIe x 4 or 2 x PCI)



NEW

PPC-3001 Series

15"/ 15.6"/ 21.5" 6th/ 4th Gen Intel® Core™ i5 Fanless Panel PC

- Intel® Core™ i5-6300U/ 4300U, 2.4 GHz/ 1.9 GHz, processor
- True-flat, IP65-rated front bezel w/ PCAP or resistive touchscreen
- Wide input voltage range (9~32 VDC, 12~32 VDC)
- Supports 1 x PCIe x 4/ PCI x1 bus expansion
- Built-in isolated RS-422/ 485 with auto flow control
- Supports triple display (1 x DP, 1 x VGA)



NEW

PPC-3001S Series

18.5"/ 21.5" 6th Gen Intel® Core™ i5 Fanless Panel PC

- Intel® Core™ i5-6300U, 2.4 GHz, processor
- True-flat, IP65-rated front bezel with PCAP touchscreen
- Compact fanless design with solid aluminum alloy enclosure
- Wide input voltage range (12~24 VDC)



PPC-3000 Series

10.4"/ 12.1"/ 15"/ 17"/ 19" Intel® Atom™ Quad-Core Fanless Panel PC

- Intel® Atom™ quad-core E3940/ E3845 (1.6/ 1.91 GHz)
- Wide operating temperature range (-20~60°C)
- Wide input voltage range (9~32 VDC)
- Supports 1 x PCI/ PCIe bus expansion
- Built-in isolated RS-422/ 485 with auto flow control
- Optional expansion for CF/ CFast, USB dongle, RS232 and GPIO



NEW

PPC-3000S Series

6.5"/ 10.4"/ 12.1"/ 15"/ 15.6"/ 18.5"/ 21.5" Intel® Celeron Dual/ Quad-Core Fanless Panel PC

- Intel® Celeron quad-core N2930/ N4200 (1.83/ 1.1 GHz)
- True-flat, IP65-rated front bezel with resistive or PCAP touchscreen
- Compact fanless design with solid aluminum alloy enclosure
- Wide input voltage range (12 ~ 24 VDC)

Industrial Monitors



FPM-2000 series

12"/ 15"/ 17" SXGA Industrial Monitor with Resistive Touchscreen and Direct-VGA Port

- Robust design with IP65 aluminum front panel
- Anti-glare screen
- Supports panel, wall, desktop, rack or VESA arm mounting
- Combination RS-232 + USB interface for touchscreen function



FPM-3000 series

15"/ 17"/ 19" SXGA Industrial Monitor with Resistive Touchscreen, Direct-VGA and DVI Ports

- Robust design with stainless steel chassis and IP65 aluminum front panel protection
- OSD control pad on front panel
- Supports industrial 12 and 24 VDC power input
- Supports panel, wall, desktop, rack or VESA arm mounting



FPM-5000 series

6.5"/ 12"/ 15"/ 15.6"/ 18.5"/ 21.5" True-Flat Industrial Monitor with PCT/ Resistive, Direct VGA, and DVI Ports

- Robust design with IP65-rated front panel
- Front USB port for easy maintenance
- Supports industrial 12 and 24 VDC power input
- Supports panel, wall, desktop, or VESA arm mounting

Control IPCs

Scalable PC-based Automation Controllers for Smart Factories



Advantech's APAX series products leverage embedded computing technology and a modular system design. Featuring flexible I/O expansion, real-time Fieldbus and I/O control, and network connectivity via a range of interfaces, the APAX series provides integrated control systems and an open environment that can be integrated with unique software to bridge the gap between operational and information technology.

Control IPCs



APAX-5580

Embedded Control IPC

- Supports CODESYS V3.5 RTE
- Onboard Fieldbus support for EtherCAT, PROFINET, Ethernet/ IP
- PLC-graded RTC battery with 10-year lifecycle
- Supports up to 8 x local and 64 x remote COM ports
- Supports up to 32 x APAX expansion I/O, 768 x DI/DO, and 192 x AI channels



APAX-5580CDS

Supports CODESYS V3.5 RTE

- Onboard Fieldbus support for EtherCAT, PROFINET, Ethernet/ IP
- PLC-graded RTC battery with 10-year lifecycle
- Supports up to 8 x local and 64 x remote COM ports
- Supports up to 32 x APAX expansion I/O, 768 x DI/DO, and 192 x AI channels

Couplers



APAX-5070/ 5071/ 5072

Fieldbus Communication Coupler

- APAX-5070 supports 1-ms Modbus response time
- Flexible Modbus mapping table
- Supports UDP data streaming and event alarms

CODESYS Cloud Connectivity Plug-in Package



WebAccess/SCADA

WebAccess/SCADA Support

- Export tags from CODESYS PLC Handler
- Seamless integration w/ WebAccess SCADA nodes



ODBC Database Direct Connection

- Update tag values to a cloud database each cycle
- Supports update times of <1 ms



OPC/ UA Support

- OPC/ UA Server supported
- Supports Micro Embedded Device Server profile
- OPC/ UA Security support (x.509)

APAX Series Modules



NEW

APAX-5090

Local Bus Communication Module

- 4 x RS-232/ 422/ 485 ports
- Up to 64 x virtual COM ports with APAX-5580
- Supports a distributed topology with APAX bus



APAX-5017H

12-ch High-Speed AI Module

- Input current: 4~20 mA
- Input voltage: $\pm 10V$
- Each channel can be configured to different input types and ranges
- 100/ 1000 Hz sampling rate per channel



APAX-5430

SATA HDD Module

- SATA I/ II/ III 2.5" HDD/ SDD
- Supports RAID 0/ 1

Edge DAQ Devices

Booster for Equipment Manufacturers, Rental Services, and End Users



Advantech's edge data acquisition solutions are designed to simplify remote equipment monitoring. These solutions can improve service quality by facilitating product care, enabling equipment operation monitoring, and allowing for efficiency and energy consumption analysis. This allows manufacturers, rental services, and end users to obtain insights on usage behaviors by connecting machine data to the cloud in order to derive intelligence through the analysis of big data. Advantech provides three major solutions for protocol translation and minimizing programming effort in different application scenarios: 1) WISE-PaaS/EdgeLink, 2) Node-RED core product solution, and 3) the ADAM-5630 open edge data acquisition platform.

WISE-PaaS/EdgeLink Core DAQ Solution



WISE-PaaS/EdgeLink

M2I Edge Engine

- Click-and-go cloud access deployment
- Protocol support for multiple PLCs
- IEC-61131-3 Soft Logic controller
- SSL encryption for web page access
- Optimized network connection with cyber security protection

Modularize Edge DAQ



ADAM-3600

Wireless Intelligent RTU with WISE-PaaS/EdgeLink

- Linux-based
- CPU: Arm® Cortex-A8, 32 bit
- RAM: 256 MB
- Data storage: micro-SD
- 2 x LAN ports
- 2 x wireless comm. interface (mini-PCIe)
- 8 x DI, 8 x AI, 4 x isolated DO channels



ADAM-3651/ ADAM-3656

Digital I/O Expansion Module

- ADAM-3651: 8-ch DI module
- ADAM-3656: 8-ch DO module



ADAM-3617/ ADAM-3624

Analog I/O Expansion Module

- ADAM-3617: 4-ch AI module
- ADAM-3624: 4-ch AO module

Edge Intelligent Communication



ECU-1251TL

RISC-based IIoT Gateway with WISE-PaaS/EdgeLink

- Linux-based
- CPU: Arm® Cortex-A8 (32-bit, 800 MHz)
- RAM: 1 GB
- Memory: 256 MB
- External storage: micro-SD, 1 GB
- 2 x LAN, 1 x USB 2.0, 4 x RS-485/ 232 ports
- 1 x mini-PCIe/ USB



NEW

ECU-1051TL

Compact RISC-based IIoT Gateway with WISE-PaaS/EdgeLink

- Linux-based
- CPU: Arm® Cortex-A8 (32-bit, 600 MHz)
- RAM: 256 MB
- Data storage: NADA flash
- 2 x LAN, 2 x COM ports



NEW

ECU-1050TL

Wireless to Wireless RISC based IIoT Gateway with WISE-PaaS/EdgeLink

- Linux-based
- CPU: Arm® Cortex-A8 (32-bit, 600 MHz)
- RAM: 256 MB
- Data storage: NADA flash
- 1 x LAN port
- 2 x wireless comm. interface (mini-PCIe)

Node-RED Core DAQ Solution



Node-RED

- Graphical programming with drag-and-drop user interface
- Exclusive function nodes for fast and customized application deployment
- Encrypted data to the cloud or a database
- Universal JavaScript-based programming for customization
- Data analytics and visualization



NEW

ADAM-6750

Data Analytics Gateway with Digital I/O

- Linux-based
- CPU: Arm® Cortex-A8 (32-bit, 1 GHz)
- RAM: 1 GB
- Memory: 256 MB
- External storage: micro-SD (1 GB)
- 2 x LAN, 1 x RS-485 port
- 8-ch DI/ 4-ch DO



NEW

ADAM-6717UH

Data Analytics Gateway with High-Speed Analog Input

- Linux-based
- CPU: Arm® Cortex-A8 (32-bit, 1 GHz)
- RAM: 1 GB
- Memory: 256 MB
- External storage: micro-SD (1 GB)
- 2 x LAN ports
- 8-ch AI/ 1-ch DO (sample rate: 100 KHz over 8 channels)



NEW

ADAM-6771

Data Analytics Gateway

- Linux-based
- CPU: Arm® Cortex-A8 (32-bit, 1 GHz)
- RAM: 1 GB
- Memory: 256 MB
- External storage: micro-SD (1 GB)
- 2 x LAN, 1 x USB 2.0, 2 x RS-485, 2 x RS-485/ 232 ports

Edge Intelligent DAQ Controller



NEW

ADAM-5630

- TI Cortex-A8 (600 MHz) w/ 512 MB of DDR3 RAM
- Real-time Linux
- 2 x LAN ports with two MAC addresses
- 4/ 8 slots selection
- Micro-SD slot for storage
- Wired and wireless communication expansion options
- Supports web services

Expansion Modules



NEW

ADAM-5037

8-ch High-Speed AI Module

- 4/ 8 slots selection
- Micro-SD slot for storage



NEW

ADAM-5101

Storage Expansion Module

- Supports mini PCI express or M.2 interface



NEW

ADAM-5101P

Mini-PCI Express Expansion

- Supports wireless expansion
- 2 x Antenna Points



NEW

ADAM-5191

Serial Expansion Module

- 4 x serial ports
- Supports RS-485/ 232/ 422



NEW

ADAM-5192

Network Expansion Module

- 2 x LAN ports



ADAM-5000 Expansion I/O Modules

- 9 x AI/ AO Channels
- 16 x DI/ DO Channels
- 2 x Counters

Industrial Communication

Seamless Data Connectivity from the Network Edge to the Core



Advantech leverages over 20 years of industry experience to develop industrial communication products that provide reliable wired and wireless communication solutions for mission critical applications. These products include industrial Ethernet switches, industrial Fieldbus gateways, Modbus gateways, cellular IP gateways, cellular routers, wireless access points/ clients, media converters, and serial device servers, all of which contribute to securely transmitting critical and sensitive information, remotely monitoring and controlling networked devices, and delivering advanced communication capabilities for industrial applications.

Wireless Sensing Platforms



Wizzard Mesh Platform

Wireless Mesh I/O Sensors—Intelligent Sensing Platforms

- Ultra-low power consumption
- 802.15.4e SmartMesh IP technology
- Supports MQTT and JSON IoT protocols
- UL Class 1/ Division 2 hazardous location rating
- IP66-rated, reinforced-fiber polyester PBT enclosure



SmartSwarm 243 LoRa Private Gateway/ WISE-6610 LoRaWAN Gateway

LoRa I/O Sensors Node and Gateway

- Low power consumption for solar and battery power applications
- Long-range, wide-area IoT gateway
- IP66-rated reinforced-fiber polyester PBT enclosure
- LoRa private protocol for closing system applications

Intelligent Gateway



SmartSwarm 351 Asset Integration Gateway

Seamlessly Integrate Data from Legacy Modbus Systems, Devices, and Sensors

- Protocol translation w/ Modbus and MQTT support
- Event triggering and data transmissions without duplication
- Data aggregation and reporting to reduce network traffic
- Authentication and encryption features for data security

LTE Routers & Gateways



SL30x Series

SmartStart Routers and Gateways

- LTE/ UMTS/ HSPA+/ HSDPA/ GPRS/ EDGE
- Wi-Fi (optional)
- 2 x SIM card holders
- Advanced security and networking features
- UL 60950-1 certification for hazardous locations



SR30x Series

SmartFlex Routers and Gateways

- LTE/ UMTS/ HSPA+/ HSDPA/ GPRS/ EDGE
- Wi-Fi (optional); GPS receiver (wired version not included)
- 2 x SIM card holders, 1 x MicroSD card holder
- PoE PD/ PSE (optional)
- Advanced security and networking features



ST35x Series

SmartMotion Routers and Gateways

- Twin interdependent cellular modules for redundant reliability
- Wi-Fi (optional) and GPS receiver (not included w/ wired version)
- 4 x SIM card holders, 1 x microSD card holder
- PoE PD/ PSE (optional)
- Advanced security and networking features

Fieldbus Gateways



EKI-1242EIMS

Modbus RTU/ TCP to EtherNet/ IP Fieldbus Gateway

- Dual power input
- Integrates Modbus RTU/ TCP and EtherNet/ IP communication
- Designed for protocol extensibility and adaption
- Built-in real-time diagnostics
- I models support a wide operating temperature range



EKI-1242PNMS

Modbus RTU/ TCP to PROFINET Fieldbus Gateway

- Dual power input
- Integrates Modbus RTU/ TCP and EtherNet/ IP communication
- Designed for protocol extensibility and adaption
- Built-in real-time diagnostics
- I models support a wide operating temperature range



EKI-1242ECMS

Modbus RTU/ TCP to EtherCAT Fieldbus Gateway

- Dual power input
- Integrates Modbus RTU/ TCP and EtherNet/ IP communication
- Designed for protocol extensibility and adaption
- Built-in real-time diagnostics
- I models support a wide operating temperature range

Serial Device Servers



EKI-1526/ EKI-1528

16/ 8-Port RS-232/ 422/ 485 Rackmount Serial Device Server

- Connect up to 8/ 16-port RS-232/ 422/ 485 devices directly to TCP/ IP networks
- High-speed baud rates (50 bps~976.5 Kbps) for high-volume transmission
- VCOM, TCP server, TCP client, UDP, and RFC2217 operating modes



EKI-1528-DR

8-Port RS-232/ 422/ 485 DIN Rail Serial Device Server

- 2 x 10/ 100 Mbps Ethernet ports for LAN redundancy
- VCOM, TCP server, TCP Client, UDP, and RFC2217 operating modes
- I models support a wide operating temperature range;
- CI models support isolation and a wide operating temperature range



EKI-1520 Series

1/ 2/ 4-Port RS-232/ 422/ 485 Serial Device Server

- 2 x 10/ 100 Mbps Ethernet ports for LAN redundancy
- VCOM, TCP server, TCP Client, UDP, and RFC2217 operating modes
- I models support a wide operating temperature range
- CI models support isolation and a wide operating temperature range

Modbus Gateway



EKI-1220 Series

1/ 2/ 4/ 8-Port Modbus Gateway

- Supports redundancy-enhanced Modbus ID
- Integrates Modbus TCP and Modbus RTU/ ASCII networks
- Wide operation temperature range and isolation (optional)

Modbus Router



NEW

EKI-1220R Series

1/ 2/ 4-Port Modbus Gateway/ Router

- Integrated stateful firewall for protection from intrusion
- Supports redundancy-enhanced Modbus ID
- Integrates Modbus TCP and Modbus RTU/ ASCII network

WLAN Device Servers



EKI-1360/ 1360MB Series

1/ 2-Port RS-232/ 422/ 485 to 802.11a/b/g/n WLAN Serial/ Modbus Device Server

- 2 x 10/ 100 Mbps Ethernet ports for LAN redundancy
- VCOM, TCP server, TCP Client, UDP, and RFC2217 operating modes
- Supports dual bands 2.4/ 5 GHz (selective)

Industrial Wireless AP/ Clients



EKI-6331AN/ 6332GN

802.11N Wi-Fi AP/ Bridge/ Client

- Compliant with IEEE 802.11 a/n and 802.11 b/g/n
- High output power
- Fast roaming
- IP55 rated for waterproof



EKI-6333AC

802.11N/ AC Wi-Fi AP/ Bridge

- Compliant with IEEE 802.11 a/b/g/n/ac
- DIN rail mounting
- Supports dual bands 2.4/ 5 GHz (selective)

NEW

L3 Switches



EKI-9700/ 9600 Series

Industrial Layer 3 Managed Switch

- Static routing/ NAT (EKI-9612G, EKI-9628G)
- Static routing, RIP v1/ v2, OSPF v2, VRRP (EKI-9728G)
- Supports up to 4 x 10GbE fiber ports (EKI-9728G)
- Wide operating temperature range

Network Management System



WebAccess/NMS

Network Management System

- Cross-browser compatible
- Online Google Maps and offline OpenStreetMap support
- Supports all Advantech Ethernet-based products
- Dynamic connectivity indication
- Automatically discovers and diagrams network topology
- PoE, ring, wireless, cellular connection indication

IEC 61850-3-Certified Switches



NEW

EKI-9228 Series

Industrial Rackmount Managed Switch with Flexible Port Options

- 16 x Gigabit RJ-45 ports, 4 x SFP, 8 x Gigabit combo ports
- SFP socket for easy and flexible fiber expansion
- Gigabit X-Ring redundancy (ultra-high-speed recovery time, <20 ms), RSTP/ STP (802.1w/ 1D), MSTP
- Wide operating temperature range (-40~85°C)
- Dual wide-range AC/ DC power input



NEW

EKI-9226G Series

26-port Rackmount Managed Switch w/ High-Density Fiber Ports

- 20 x Gigabit SFP + 6 x Gigabit RJ-45 ports
- Numerous fiber ports for establishing fiber links to many locations
- Security: 802.1x, HTTPS, SSH, and SNMPv3
- Gigabit X-Ring redundancy (ultra-high-speed recovery time, <20 ms), RSTP/ STP (802.1w/ 1D), MSTP
- Wide operating temperature range (-40~85°C)
- Dual wide-range AC/ DC power input and 2 x relay outputs



NEW

EKI-9213

DIN Rail Managed Switch w/ Support for HSR/ PRP

- 8 x 10/ 100 Mbps RJ-45 + 3 x 100/ 1000 Mbps SFP + 2 x 10/ 100 Mbps HSR/ PRP combo ports
- IEC 62439-3 Clause 4 (PRP) and Clause 5 (HSR)-compliant
- Security: 802.1x, HTTPS, SSH, and SNMPv3
- Wide operating temperature range (-40~85°C)

L2 Managed Switches



EKI-7428G-4CI

Industrial Rackmount Managed Switch

- IXM for rapid deployment
- Management: SNMP v1/ v2c/ v3, WEB, Telnet, Standard MIB
- Wide operating temperature range (-40~70°C)
- Dual-power input (12~48 Vdc)
- EN50121-4 and NEMA TS2-certified



EKI-7700 Series

Industrial Managed Switch

- Models supporting Gigabit / FastEthernet ports + Gigabit Copper/ SFP combo ports
- IXM function enables fast deployment
- IP30-rated chassis design
- EN50121-4 and NEMA TS2-certified



EKI-5500-EI/ PN/ 5600-EI/ PN

Managed Switch with EtherNet/ IP or PROFINET Protocol Support

- UL508, Class 1 Division 2, ATEX-certified
- Compatible with SIMATIC step 7 and TIA portal (PROFINET-compatible models)
- PROFITNET models support MRP
- Faceplate compatible with Rockwell FactoryTalk® View (Ethernet/ IP compatible models)
- Easy and fast deployment from Advantech IXM technology

Unmanaged Switches



EKI-5000 Series

Unmanaged Switch

- IECEx, ATEX, CID2 certification for hazardous environments
- Monitoring utility
- Port-based QoS for deterministic data transmissions
- Loop detection
- Dual-power input



EKI-2000 Series

Unmanaged Switch

- 5 x Fast Ethernet ports w/ slim design (W 25 x H 80 x D 84 mm)
- Supports redundant power input + 1 x DC power jack
- Wide operating temperature range (-40~75°C)
- IP40-rated chassis design
- AC power design (EKI-2428G-4FA)



EKI-2525LI

Unmanaged Switch

- 5 x Fast Ethernet ports w/ slim design (W 25 x H 80 x D 84 mm)
- Supports redundant power input + 1 x DC power jack
- Wide operating temperature range (-40~75°C)
- IP40-rated chassis design

PoE Switches



EKI-7428G-4CPI

Industrial Rackmount Managed Switch with 24G PoE, 4G Combo Ports

- 24 x IEEE 802.3 af/ at PoE Gigabit ports, 4 x Gigabit copper/ SFP combo ports
- IXM for rapid deployment
- Management: SNMP v1/ v2c/ v3, WEB, Telnet, Standard MIB
- Wide operating temperature range (-40~70°C)
- EN50121-4 and NEMA TS2-certified



EKI-7700 Series

Fully Managed PoE/ PoE+ Industrial Ethernet Switch

- X-Ring Pro redundancy (recovery time < 20 ms)
- IXM for rapid deployment
- Wide operating temperature range (-40~75°C)
- EN50121-4 and NEMA TS2-certified



EKI-5000/ 2000 Series

Unmanaged PoE/ PoE+ Industrial Ethernet Switch

- Compact size
- Redundant power design
- Wide operating temperature range (-40~75°C)
- IP30-rated chassis design
- IECEx, ATEX, and CID2 certification for hazardous environments (EKI-5000 Series)



EKI-9528/ 9520 Series

28/ 20-Port EN50155 Managed Switch w/ Support for PoE

- EKI-9520: 16 x M12 D-coded/ X-coded PoE ports + 4 x M12 X-coded w/ bypass
- EKI-9528: 16 x M12 D-coded/ X-coded PoE ports + 4 x M12 X-coded w/ bypass + 8 x M12 D-coded/ X-coded ports
- M12 with IP67 protection
- Wide operating temperature range for EN501055 Tx (-40~70°C)
- Wide input power range (24/ 36/ 48/ 72/ 96/ 110 Vdc)



EKI-9516/ 9512/ 9510/ 9508 Series

16/ 12/ 10/ 8-Port EN50155 Managed Switch w/ Support for PoE

- IEEE 802.3af/ 802.3at per port with system PoE power management (PoE models)
- Compact size for space-limited environments (EKI-9510/ 9508)
- Wide operating temperature range for EN501055 Tx (-40~70°C)
- M12 with IP67 protection (EKI-9516/ 9512)



EKI-9512E-4EETB

EN50155 Train Router for Rolling Stock Backbone

- 8 x 10/ 100 Mbps M12 D-coded + 4 x 10/ 100 Mbps M12 D-coded w/ bypass
- TTDP (IEC-61375-2-5)
- Wide input power range (24/ 36/ 48/ 72/ 96/ 110 Vdc)

Wireless IoT Sensing Devices

Intelligent Wireless Sensing Devices for IoT Big Data Acquisition



With developments in wireless and cloud technology, more remote management services have adopted cloud services for wide area communication. To shorten the gap between the network edge and the cloud, Advantech provides wireless sensing devices that directly pass data to the cloud by utilizing MQTT and RESTful APIs.

While WISE-4000 are designed for wide area communication with Wi-Fi, LPWAN, LoRa, NB-IoT/eMTC, and 3G/LTE, the WISE-2000 are all-in-one devices for specific applications, and the WISE-6000 comprise ready-to-use M2I edge devices for remote machine status monitoring and management.

Wireless I/O Modules



WISE-4000 Series

2.4 GHz Wi-Fi I/O Module

- REST and MQTT protocol for IoT or cloud services
- Local data logger and cloud storage w/ secure sockets
- HTML5 web interface for mobile configuration

WISE-4012

- 4-ch AI/ DI + 2-ch DO

WISE-4051

- 8-ch DI + 1 x RS-485 port

WISE-4050/ 4060

- 4-ch DI + 4-ch DO/ relay

WISE-4012E IoT Developer Kit

- 2-ch AI + 2-ch DI + 2-ch relay
- Ready-to-use software and accessories for immediate use

Wireless Sensor Nodes



WISE-4200/ 4400/ 4600 Series

Sensor to Intelligence Node

WISE-4220 (2.4 GHz Wi-Fi)

- REST and MQTT protocol for IoT or cloud services
- Local data logger and cloud storage w/ secure sockets

WISE-4210 (Sub-GHz LPWAN)

- Less interference than at 2.4 GHz
- Long distance communication with 3.6 V AA battery power

WISE-4470 (Cellular, NB-IoT)

- Local data logger and cloud storage w/ secure sockets
- IP65-rated protection with M12 connectors and an internal antenna

WISE-4610 (LoRa, LoRaWAN)

- IP65-rated protection with M12 connectors for outdoor applications
- Solar panel rechargeable battery and optional GPS for location tracking

Wireless Sensor Devices



WISE-2000 Series

Self-Powered Sensor Nodes and Intelligent RFID Gateways

WISE-2210 (Sub-GHz LPWAN)

- Self-Powered by photovoltaic panel or current transducer
- Power consumption measuring or environment monitoring for equipment and machine

WISE-2800 (RFID)

- 4-port UHF RFID read/ write function
- Node-RED programmable for data read/ write, filtering, and transfer
- Application-ready function block
- Ethernet and Wi-Fi interface for up-link

Wireless M2I Edge Devices



WISE-PaaS/ EdgeLink



WISE-6200 Series

RISC Edge Device with Arm Cortex-A8 and RT-Linux OS

- Support for more than 100 PLC drivers via WebAccess/ TagLink
- Built-in DI/DO, AI/AO, RS-485 and Ethernet for machine status monitoring
- Wi-Fi, 3G, NB-IoT w/ mini-PCIe communication
- Intelligent logic control with Node-RED
- ePaper for local visualization and web service support for remote management

Data Acquisition and Control

Diverse Form Factors to Satisfy All DAQ Requirements



Advantech offers a wide range of industrial data acquisition and control devices with various interfaces and functions. Based on PC technology, from add-on cards and portable modules to signal conditioning and graphical software tools, Advantech's industrial I/O products are reliable, accurate, affordable, and suitable for a range of industrial automation applications such as measurement, laboratory operations, machine automation, and production testing. Moreover, Advantech's latest DAQNavi I/O driver supports Windows 7, 8, 10, and Linux, enabling customers to seamlessly integrate data acquisition cards with the latest platforms for improved performance and reduced development time.

PCI Express DAQ Cards



NEW

PCI-1730H/ 1756H

32/ 64-ch Isolated DI/DO PCI Express Card

- 16/ 32-ch isolated DI/DO channels w/ 24 V compatibility
- Interrupt handling capability for all DI channels
- Software-selectable digital filter time for all DI channels
- 16-ch TTL DI/DO w/ 5 V compatibility (PCI-1730H only)
- High-voltage isolation on all isolated DI/DO channels (2,500 V_{DC})



PCI-1812

8-ch Simultaneous Sampling Multi-Function PCI Express Card

- 8 x differential simultaneous sampling AI channels (sample rate: up to 250 kHz; resolution: 16-bit)
- 2 x AO channels (sample rate: up to 3 MHz; resolution: 16-bit)
- 2 x analog/ digital triggers for AI/ AO channels
- 4 x 32-bit programmable encoder counters/ timers
- 32 x programmable DI/DO channels with interrupt function



NEW

PCI-1813

4-ch, 26-bit Simultaneous Sampling, Universal Bridge Input, Multi-Function PCI Express Card

- 4 x AI channels (sample rate: 38.4 Hz/ 4 s; resolution: 26-bit for full-, half-, and quarter-bridge sensor inputs)
- 2 x AO channels (sample rate: up to 3 MHz; resolution: 16-bit)
- 4 x 32-bit programmable encoder counters/ timers
- 32 programmable DI/DO channels with interrupt functions



PCI-1810/ 1816/ 1816H

16-ch AI Multi-Function PCI Express Card

- Sample rate: 500 KHz for PCI-1810 and PCI-1816; 1 MHz for PCI-1816H
- Resolution: 12/ 16-bit
- Analog and digital triggers
- Waveform generator for AO channels
- 24 x programmable DI/DO channels



PCI-1802/ 1802L

8/ 4-ch Dynamic Signal Acquisition PCI Express Card

- 8/ 4 x simultaneously sampled AI channels (sample rate: up to 216 KHz)
- 24-bit resolution A/D converters (dynamic range: 115 dB)
- Wide input voltage range ($\pm 0.2 \sim 10$ V)
- Built-in anti-aliasing filter



NEW

PCI-1840/ 1840L

4-ch Digitizer PCI Express Card

- 4 x AI channels (sample rate: up to 125/ 80 MHz, resolution: 16-bit)
- 500-MHz time-interleaved sampling rate
- Supports continuous data streaming
- 2 GB of onboard memory

PCI DAQ Cards



PCI-1714U/ 1714UL

4-ch Simultaneous AI PCI Card

- A/D converter for each channel
- 4 x single-ended AI channels (12-bit, 30 MHz for PCI-1714U; 12-bit, 10 MHz for PCI-1714UL)
- 30 VDC overvoltage protection



PCI-1716/ 1716L

16-ch Multi-Function PCI Card

- 16 x single-ended, 8 x differential/ combination AI channels
- 16-bit A/D converter (sample rate: up to 250 kHz)
- Automatic calibration
- 16 x DI/DO channels
- 2 analog outputs with 16-bit resolution (PCI-1716 only)



PCI-1730U/ 1756

32/ 64-ch Isolated DI/O Universal PCI Card

- High-voltage isolation on DO channels (2,500 V_{DC})
- Wide output voltage range (5~40 VDC)
- High sink current for isolated output channels (max. 200 mA/ channel)
- Current protection for each port

USB DAQ Modules



USB-4711/ 4716

16-ch Multi-Function USB Module

- 2 x analog output channels
- Resolution (sample rate): 12-bit (150 kHz)/ 16-bit (200 kHz)
- 8x 5V/ TTL-compatible DI/DO channels
- 1 counter for event counting, frequency measurement, and PWM output
- Lockable USB cable for connection security



NEW

USB-5830/ 5856

32/ 64-ch Isolated Digital I/O module (USB 3.0)

- SuperSpeed USB (5 Gbps)
- Built-in USB hub
- 2,500 VDC isolation protection
- Level 3 ESD and surge protection



NEW

USB-DSO

2-ch Digital Storage Oscilloscope

- Sample rate: up to 1 GHz
- Bandwidth: 200 MHz
- Waveform memory: up to 128 MS/ ch
- Resolution: 8/ 16-bit

Communication Solutions



PCI-1600/ PCIE-1600

2/ 4/ 8-Port PCI/ PCIE Serial Communication Card with Surge/ Isolation Protection

- PCI/ PCIE - 1604/ 1610/ 1620: RS-232 port
- PCI/ PCIE - 1602/ 1612/ 1622: RS-232/ 422/ 485 port
- Optional surge/ isolation protection
- Fast data transmission: up to 921.6 kbps



PCIE-1680

2-Port CAN Bus Universal PCI Communication Card w/ CANopen Support

- Supports two simultaneous CAN networks
- Fast data transmission: up to 1 Mbps
- CAN controller frequency: 16 MHz
- Isolation protection: 2,500 VDC



USB-4630

4-Port Isolated SuperSpeed USB 3.0 Hub

- The world's first isolated SuperSpeed USB Hub (5 Gbps)
- 2,500 VDC voltage isolation for upstream ports
- Lockable USB 3.0 cable included
- Can be powered via USB bus or 10~30 VDC external power source

EtherCAT Remote I/O Modules



NEW

AMAX-4817

8-ch Isolated AI EtherCAT Remote I/O Module

- Suitable for EtherCAT networks
- 8 x AI channels w/ 2,500 VDC isolation (resolution: 16-bit)
- Quick-remove European-type connector
- Supports DC mode
- LED indicators for I/O status



AMAX-4830

16-ch Isolated DI/DO EtherCAT Remote I/O Module

- Suitable for EtherCAT networks
- 2,500 Vdc isolation
- Quick-remove European-type connector
- Supports DC mode
- LED indicators for I/O status



AMAX-4856

32-ch Isolated DI/DO EtherCAT Remote I/O Module

- Suitable for EtherCAT networks
- 2,500 Vdc isolation
- Quick-remove European-type connector
- Supports DC mode
- LED indicators for I/O status

DAQ-Embedded Computers



MIC-1810/ 1816

12/ 16-bit Data Acquisition Platform w/ Intel® Core™ i3/Celeron® Processor

- Intel® Celeron® 1047UE (1.4 GHz)/ Core™ i3-3217UE processor (1.6 GHz)
- MIC-1810: 16x AI channels (sample rate: up to 500 KHz; resolution: 12-bit), 2 x AO channels (sample rate: up to 500 KHz; resolution: 12-bit)

- MIC-1816: 16 x AI channels (sample rate: up to 1 MHz; resolution: 16-bit), 2 x AO channels (sample rate: up to 3 MHz; resolution: 16-bit)
- 2 x 10/ 100/ 1000BASE-T RJ45 LAN ports
- 2 x USB 2.0 and 2 x USB 3.0 ports

- 2 x RS-232 ports
- Onboard FIFO memory (4k samples)
- Supports digital and analog triggers
- 24 x programmable DI/DO channels
- 2 x programmable counters/ timers (32-bit)

Remote I/O Modules

Transformation for IIoT's Wider & Larger Applications



Advantech's ADAM remote I/O modules, with their cutting-edge functional design, have been a consistently reliable figure in the industrial automation field for over 25 years. The versatile product offerings and latest technology updates for this series of modules continue to accelerate the realization of industrial IoT and fulfill the demands of larger scale network infrastructure in an increasingly more diverse range of applications. With RFID and USB technology, users have additional options for configuration and inspection, even when unpowered. Additionally, for larger network infrastructure, ADAM Ethernet-based remote I/O modules use SNMP and MQTT to enhance communication efficiency.

RFID Introduction

Serial I/O Modules



RFID Access



Applicable to ADAM-4100 and ADAM-6200 series



ADAM-4100 Series

Robust RS-485 I/O Modules

- Wide operating temperature range (-40~85°C/ -40~185°F)
- High protection level: 4-kV surge, 3-kV EFT, 8-kV ESD
- High common mode voltage: 200 VDC
- Burnout detection

Module Selection

- ADAM-4117: Robust 8-ch AI module
- ADAM-4118: Robust 8-ch thermocouple
- ADAM-4150: 7-ch DI/ 8-ch DO module
- ADAM-4168: 8-ch relay module



ADAM-4000 Series

RS-485 I/O Modules

- Watchdog timer
- ± 35 VDC overvoltage protection
- 3,000 VDC voltage isolation

Module Selection

- ADAM-4017+: 8-ch AI module
- ADAM-4024: 4-ch AO/ 4-ch DO module
- ADAM-4015: 6-ch RTD module
- ADAM-4051: 16-ch DI module
- ADAM-4055: 8-ch DI/ 8-ch DO module

Ethernet I/O Modules



ADAM-6200 Series

Daisy-Chain Ethernet I/O Modules

- Cloud management: configuration, monitoring, and firmware updates
- Daisy chain connectivity w/ auto-bypass protection
- Supports HTML5, JavaScript, XML
- Supports GCL and P2P functions
- Group configuration capability

Module Selection

- ADAM-6217: 8-ch AI module
- ADAM-6224: 4-ch AO/ 4-ch DI module
- ADAM-6250: 8-ch DI/ 7-ch DO module
- ADAM-6251: 16-ch DI module
- ADAM-6266: 4-ch Relay/ 4-ch DI module



ADAM-6100 Series


Real-Time Ethernet I/O Modules

- Daisy chain connectivity
- Coupler-free design
- GSD, L5K, and EDS file-ready
- 2,500 VDC isolation protection

Module Selection

- ADAM-6117EI/PN: 8-ch AI module
- ADAM-6160EI/PN: 6-ch relay module
- ADAM-6150EI/PN: 8-ch DI/ 7-ch DO module
- ADAM-6151EI/PN: 16-ch DI module
- ADAM-6156EI/PN: 16-ch DO module

*PROFINET: PN, EtherNet/ IP: EI

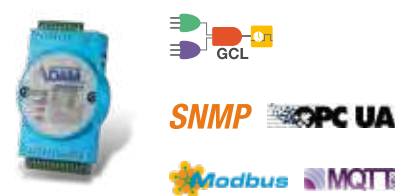

ADAM-6000 Series

Smart Ethernet I/O Modules

- Cloud management: configuration, monitoring, and firmware updates
- Embedded web server
- Data stream function to push data
- Supports GCL and P2P functions
- Supports C# .NET and VB.NET

Module Selection

- ADAM-6015: 7-ch RTD module
- ADAM-6017: 8-ch AI/ 2-ch DO module
- ADAM-6050: 12-ch DI/ 6-ch DO Relay module
- ADAM-6060: 6-ch DI/ 6-ch Relay module

Industrial Tablets for Mobile Workers

Support On-Site Management, Manufacturing and Inspections



Advantech's industrial tablets are designed for mobile workers in on-site factory inspections. Equipped with the latest Intel® processor and RF technology, our rugged tablets enable seamless data transmission, thus ensuring access to real-time information. For example, the AIM-65 tablet and application-oriented peripherals are built for rough handling in extreme environments; this tablet has been drop-tested at 1.2 m and has an IP65 rating. The extension module also has a barcode scanner (20°/ 70°) and RJ45+COM capabilities to satisfy customization requirements. For extended operations, the AIM-65 can be operated and easily removed from its wall docking station, and it has hand and shoulder straps to enable hands-free carry.

Industrial-Grade Tablets and Handheld Terminals



PWS-872

10" Industrial-Grade Tablet w/ 7th Gen Intel® Core™ i3/i5/i7/Celeron® Processor

- 10.1" high-brightness WUXGA LED display with scratch-resistant Corning® Gorilla® Glass 3 panel
- Multi-touch PCAP touchscreen with support for gloved operation
- Rugged design with MIL-STD-810G certification, IP65 rating, and 4-ft. drop tolerance
- 4G LTE, WLAN (802.11 a/b/g/n/ac), Bluetooth 4.1, and GPS modules with BeiDou/ GLONASS support
- Built-in front and rear cameras, 1D/ 2D barcode scanner, and NFC RFID reader

AIM-65

8" Industrial-Grade Tablet w/ Intel® Atom™ Processor

- Intel® Atom™ processor for Windows 10 IoT and AIM Android operating systems
- 8" WUXGA full HD display with scratch-resistant Corning® Gorilla® Glass 3 and multi-touch PCAP control
- WLAN, BT, NFC, 3G/ 4G LTE technology for seamless communications
- Optional extension modules such as a 1D/ 2D barcode scanner and LAN +COM module
- Additional modules and accessories can be customized according to application requirements

PWS-472

5" Industrial-Grade Handheld Terminal w/ Arm® Cortex™-A53 Quad-Core Processor

- ARM® Cortex™-A53, quad-core, 1.3 GHz processor with Android 5.1
- 5" HD (1280 x 720) capacitive touchscreen
- Lightweight design (295 g)
- IP65 rated for protection from water and dust
- Wide operating temperature range (-20~60°C)
- Wi-Fi, Bluetooth, GPS, BeiDou, and 4G LTE communication capabilities
- 13-megapixel auto-focus camera and optional 1D/ 2D barcode scanner

PWS-472 UHF RFID Reader

5" Industrial-Grade Handheld UHF RFID Reader with ARM® Cortex™-A53 Quad-Core Processor

- Built-in 13-megapixel auto-focus camera and 1D/ 2D barcode scanner
- Long-range UHF RFID capabilities (compatible with EPC C-1 G-2/ ISO 18000-6C)
- User-friendly trigger button
- IP54 rated for protection from water and dust
- Wi-Fi, Bluetooth, GPS, BeiDou capabilities

Enabling an Industrial IoT Evolution

Advancements in technology have shaped modern life, allowing us to interconnect people in ways never thought possible before. Advantech, a global industrial computing and automation manufacturer, continues to explore what technology brings to our lives. With over three decades of proven experience, we combine information, automation and communication technology with efficiency, energy conservation, minimized risk, cost-effectiveness, and environmental protection to create solutions to enable an intelligent planet.

Transportation


- Railway
- Road network
- Transport hub

General Industrial IoT

- Platforms for general industries
- Platform & device distribution
- Medical Equipment, Broadcasting and Video Surveillance

Industrial Equipment Manufacturing (IEM)

- Machine automation
- Predictive maintenance
- Remote control and video capture
- Edge computing

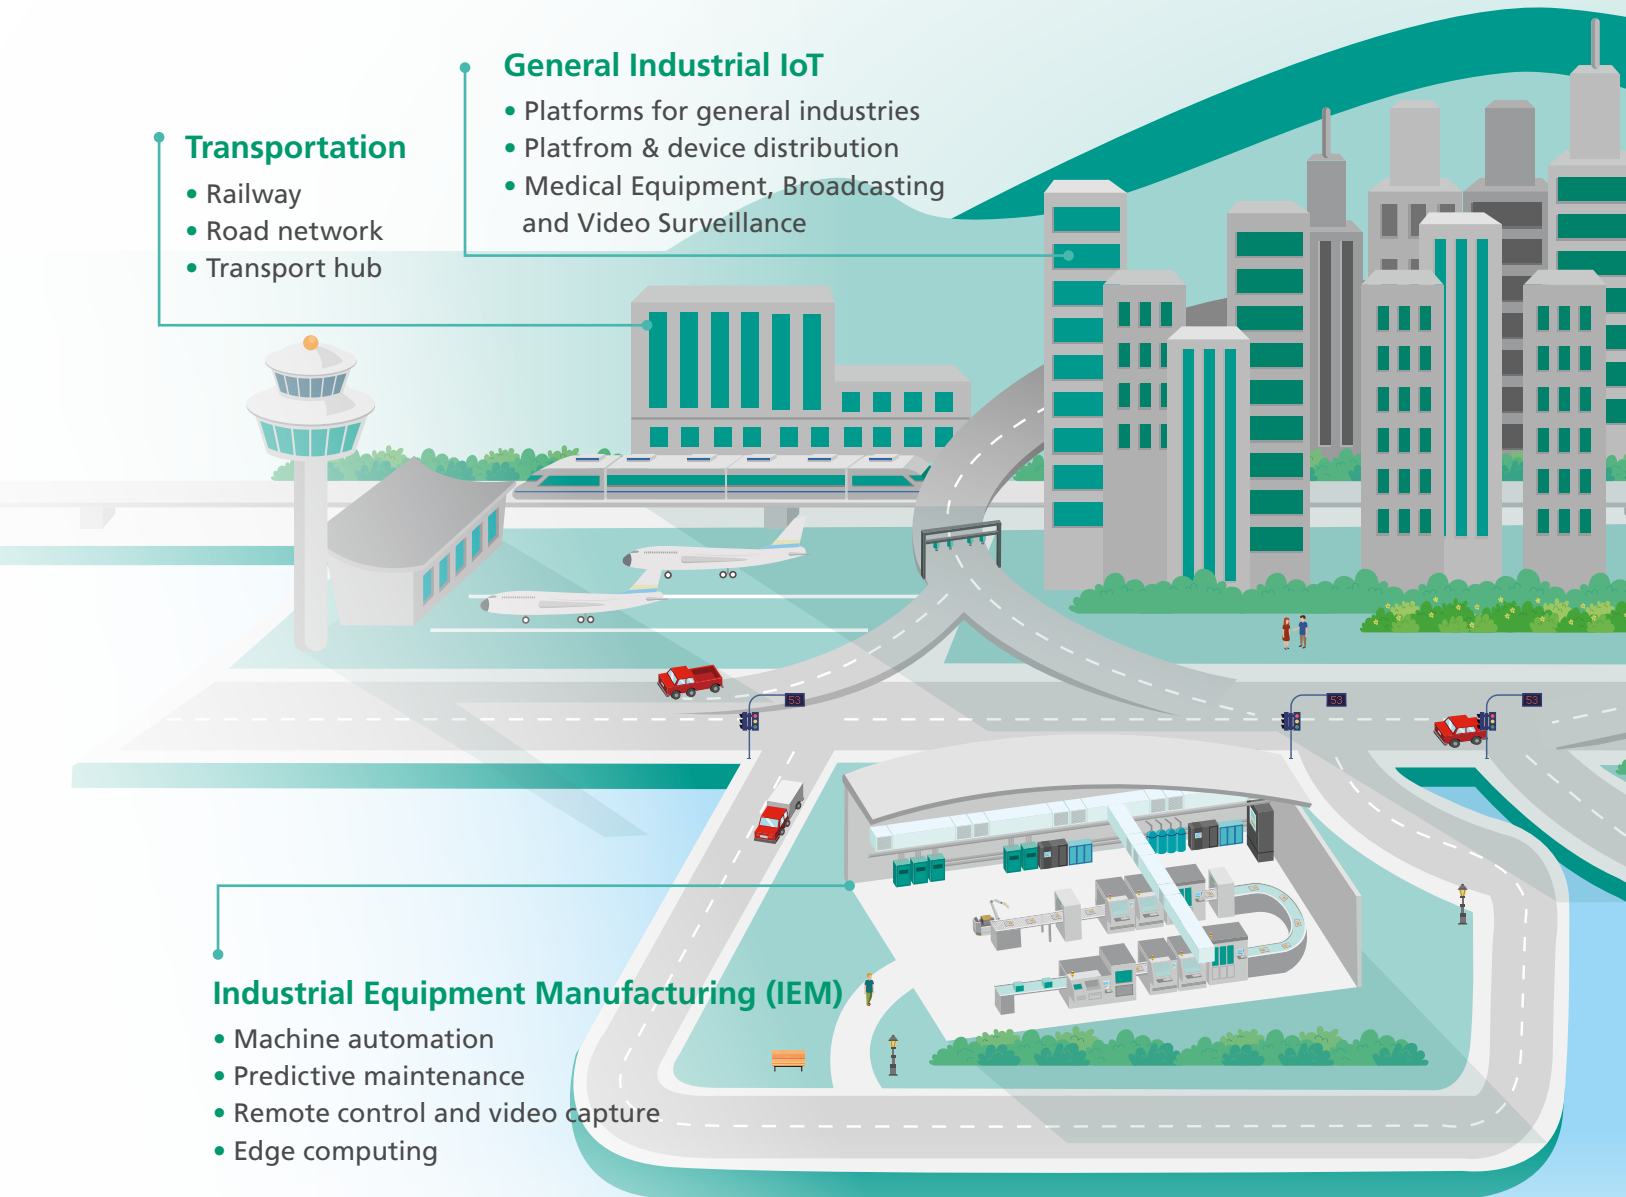



iConnectivity

- WebAccess/NMS
- Cellular routing solution
- Wired & wireless network infrastructure
- Protocol & interface conversion solution

Energy & Environment


- Energy management
- Solar power management
- Water management
- Pollution monitoring

iFactory

- M2I/iMachine
- OEE monitoring
- Industry 4.0 situation room
- Factory energy & environment monitoring
- Warehouse management

Industry 4.0

Industry 4.0 is transforming manufacturing worldwide. Factory management needs assistance as they either upgrade existing facilities, or establish new ones that take advantage of Industry 4.0 optimization. Advantech's IoT solution architecture strategy enables the development of iSensing devices, edge intelligent gateways, and iFactory Solution Ready Packages (SRPs) that help our customers embrace Industry 4.0.

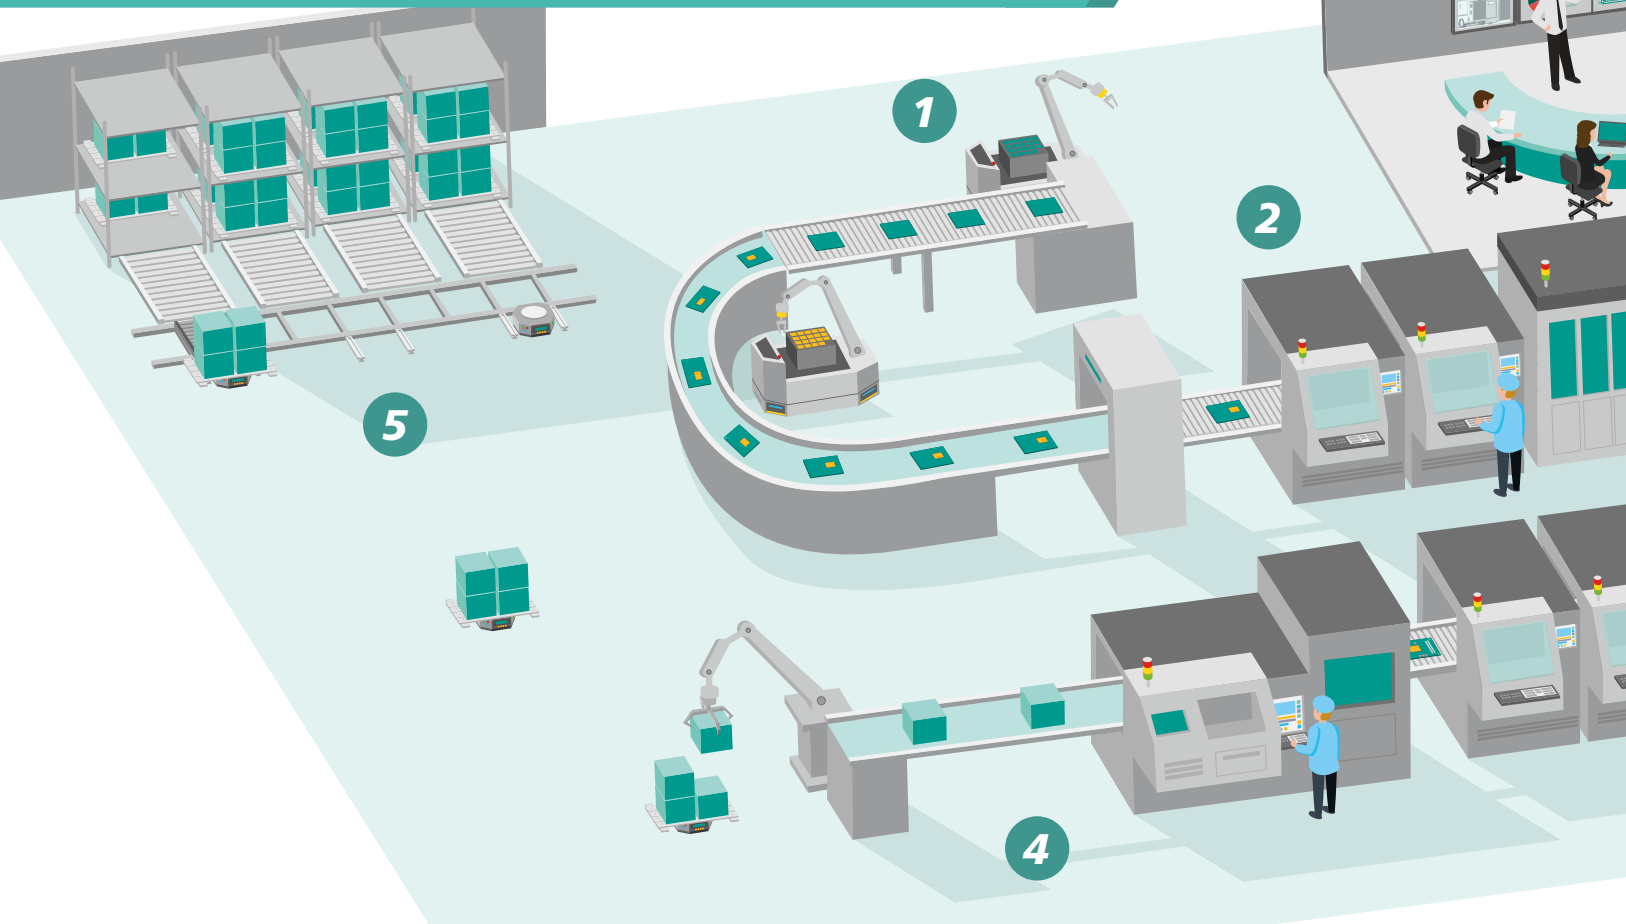

Product Solutions

WebAccess Software



Advantech WebAccess
• IIoT application software platform

Solution Ready Package (SRP)



SRP Series
• Software-hardware integrated solutions

Wireless IoT Sensing Devices



WISE-4000 Series
• IIoT wireless I/O modules

Remote I/O Modules



ADAM-4000/6000 Series
• RS-485 & Ethernet I/O modules



1

M2I/iMachine

- Real-time monitoring for cloud-based Machine-to-Intelligence (M2I) management.
- Robot management with machine status monitoring, diagnosis, and intelligent prediction.
- CNC machine monitoring for enhanced CNC management and predictive maintenance.

Predictive Maintenance

- Access multiple data sources in real time to predict asset failures or quality issues and improve operational processes.
- Intelligent predictive analytics to prevent unexpected breakdowns, allowing maintenance to be planned before failures occur.

2

OEE Monitoring

- Data acquisition from wireless shop-floor devices in real time.
- Overall Equipment Effectiveness (OEE) monitoring for realizing equipment connectivity and effective optimization.
- Dashboard visualization with machine availability, downtime, and streamlined balance rates.

3

Industry 4.0 Situation Room

- Factory nerve center where data is collected, analyzed, and visualized for real-time management and data-driven decision making.
- Data consolidation and visualization framework easily accessible to factory managers.
- Real-time management for efficiency improvements and production optimization.

4

Factory Energy & Environment Monitoring

- Factory energy management system to enable energy supply and consumption optimization to reduce factory operating costs.
- Temperature and humidity monitoring to optimize factory operations.
- Factory safety can be monitored for dust, gas, CO₂, water and other hazardous materials to ensure the factory environment is safe.

5

Warehouse Management

- Automated guided vehicles (AGV) solution to transport materials and products.
- Full warehouse inventory visibility to optimize warehouse management.
- Paperless warehouse management in real time to ensure competitive and successful distribution operations.

Industrial Communication



EKI Series, Wzzard™ & IE Multiway
• Industrial communication

Industrial Controllers



UNO-1000/3000, APAX-5000 & MIC-7000 Series
• Control IPCs

IIoT Gateways



ADAM-3600/ECU-1100 & UNO-2000 Series
• Industrial IoT gateways


Intelligent HMI



TPC & PPC Series
• Control panels, thin clients, and operator panels

Industrial Equipment Manufacturing Solutions

The key step Advantech adopts to realizing intelligent manufacturing and smart equipment is to connect devices, computing systems, and equipment together to accomplish data acquisition, analysis, and visualization. Cloud platform services and dashboards complete data integration and allow network connection of all equipment and data to achieve intelligent manufacturing processes and industry transformation.

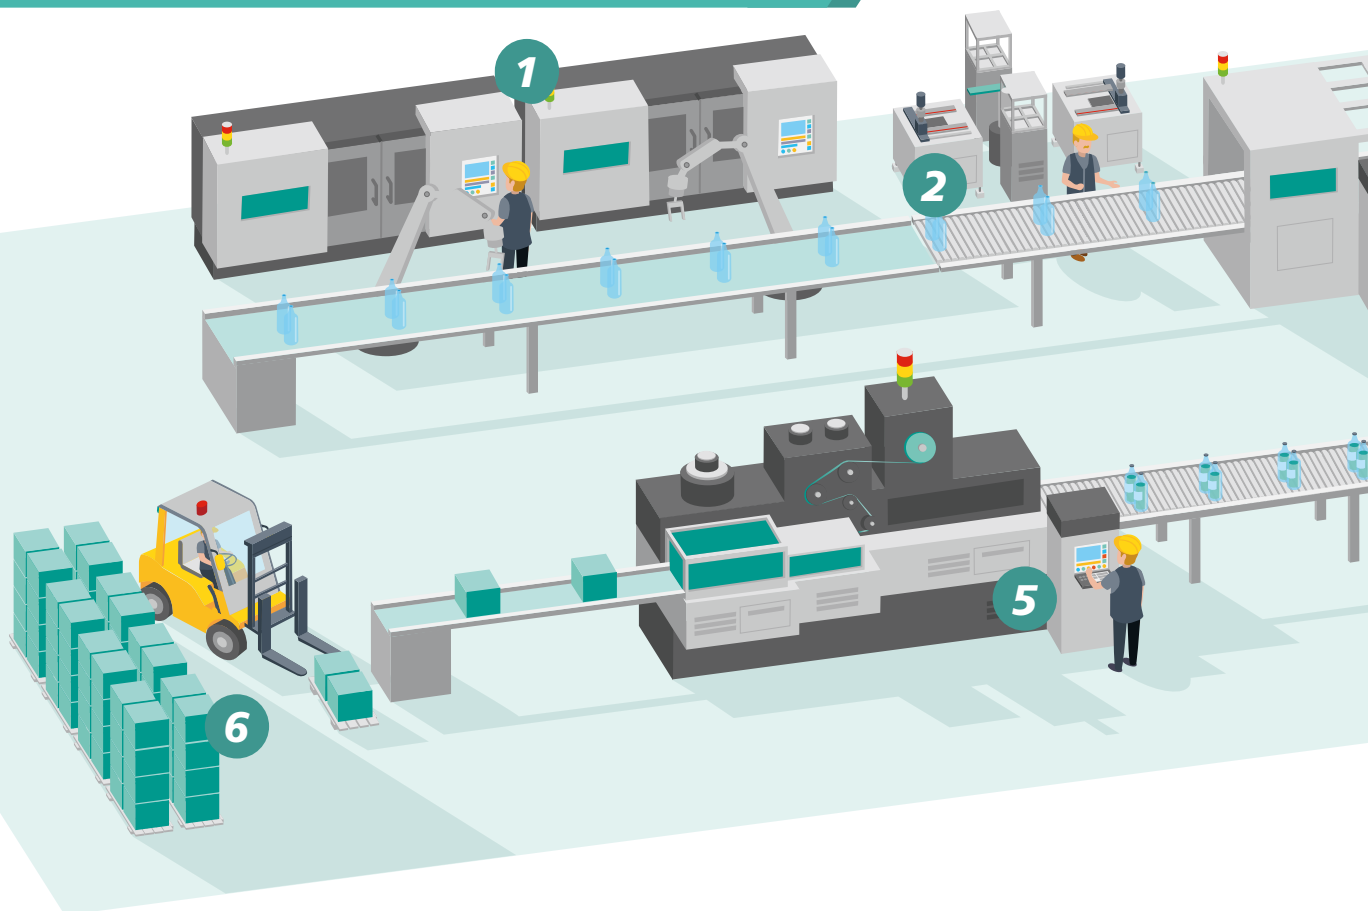

Product Solutions

Motion Control



- Supports versatile EtherCAT servo/stepping motor
- Pulse train control via EtherCAT motion module

Machine Vision



- Easy-to-configure without programming
- Intuitive GUI shortens the learning curve

Industrial Ethernet Switch & Wireless Network




- Wired & wireless network infrastructure

Data Acquisition



- Provides a wide range of I/O devices with various interfaces and functions
- Reliable and accurate data acquisition hardwares and graphical software tools

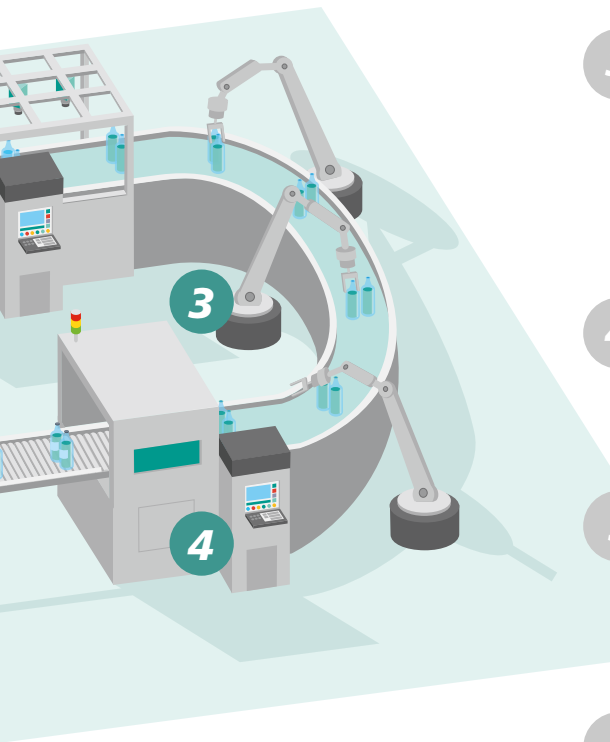

1

Remote Control and Video Capture

- Extremely low latency(<3 ms) for video, control and data transmission
- Extends up to 100 meter (330 ft)
- Supports High Resolution 1920x1080 @ 60Hz

2

Protocol Gateway

- Supports various widely used industrial protocols such as PROFINET, EtherNET/IP and EtherCAT
- Seamless conversion between each industrial protocol
- Efficiently connect to different protocol equipment with redundancy and management features

3

Predictive Maintenance

- Wide-range of industrial data acquisition and control devices with various interfaces and functions
- Reliable, accurate, affordable, and suitable for diverse industrial automation applications
- Enables customers to seamlessly integrate data acquisition cards with the latest platforms for improved performance and reduced development time

4

Edge Computing

- Modular design for PC-based controllers, industrial PCs, and panel computers
- High system configuration flexibility to meet the needs of various applications
- Minimize lead times with global CTOS capability

5

Motion Control and Machine Vision

- Unique SoftMotion kernel and innovative GigE Vision offloads engine using FPGA, DSP and ARM as the core-computing platform
- Provides versatile solutions and optimum motion / vision performance for fulfilling the demands of OEM machine makers and system integrators

6

Industrial Connectivity

- Robust, reliable, and sophisticated connectivity from the network edge to the network core
- Transmit data over copper cables, fiber optics, and wireless connections
- Flexible access to network status via multiple industrial protocols

Remote Control and Video Capture



- Only one power supply supports both transmitter and receiver
- Mountable design for Industry application scenario

All-in-One Computing Platform



- AIIS Series: Compact Vision System supports the latest Intel® Core™ processors
- AiMC Series: Micro Computer supports the latest Intel® Core™ processors

Modular IPC



- Comprises compact modularized systems
- Supports the innovative i-Module for flexible expansion to satisfy diverse application requirements


Servers and Storage



- Xeon® E5 processor for high performance computing
- CPU/GPU hybrid technology for video-intensive applications
- Supreme server DTOS for optimal customization

Intelligent Transportation Systems

From railways to roads, airports to harbors, the endless streams of vehicles, passengers, and cargo vessels create difficulties and challenges for transportation infrastructure planning by city authorities and traffic operators. With decades of experiences and an impressive portfolio of successful applications, Advantech offers a comprehensive range of solutions and in-depth industry know-how to help our partners and customers build effective transportation systems around the world.

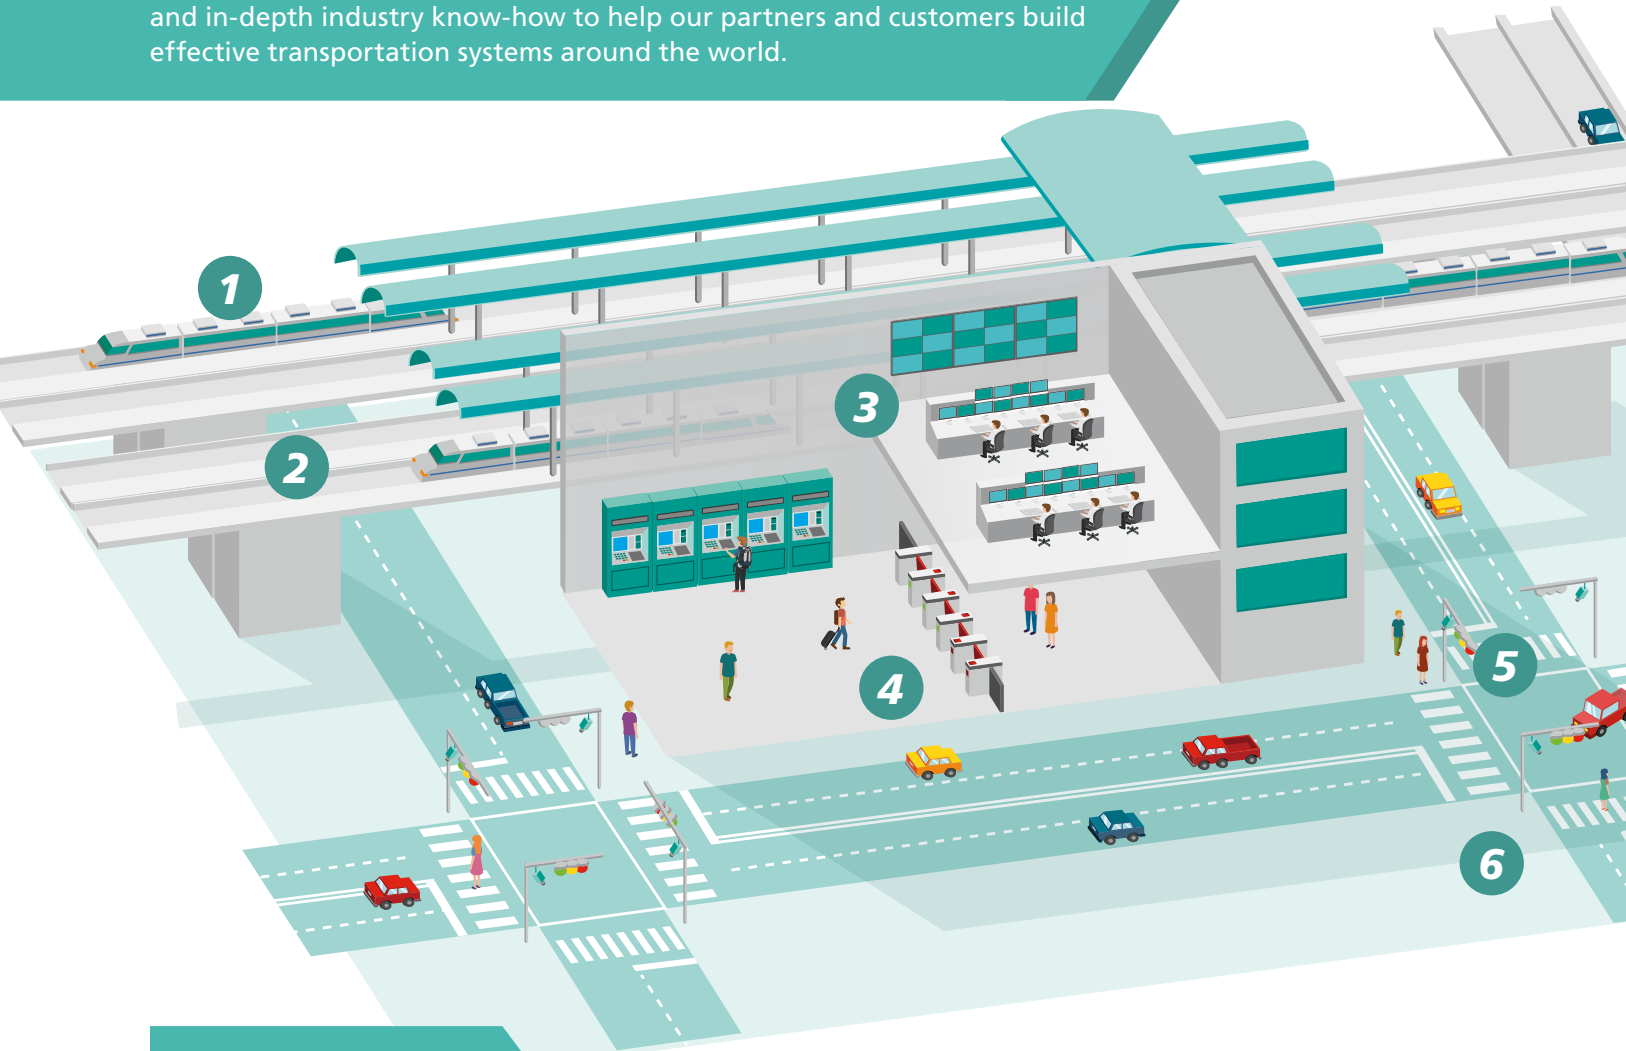

Product Solutions

Rolling Stock Controller



ITA-5000 Series

- EN 50155 certified product for railway applications

Rugged-design Platform



ITA-2000 Series

- Flexible configuration design for multiple COM, CAN, LAN

AFC Controller



ITA-1000 Series


- EN 50155 Certified Panel PC

Display System



ARS-P3800/2800

- EN 50155 Certified Panel PC

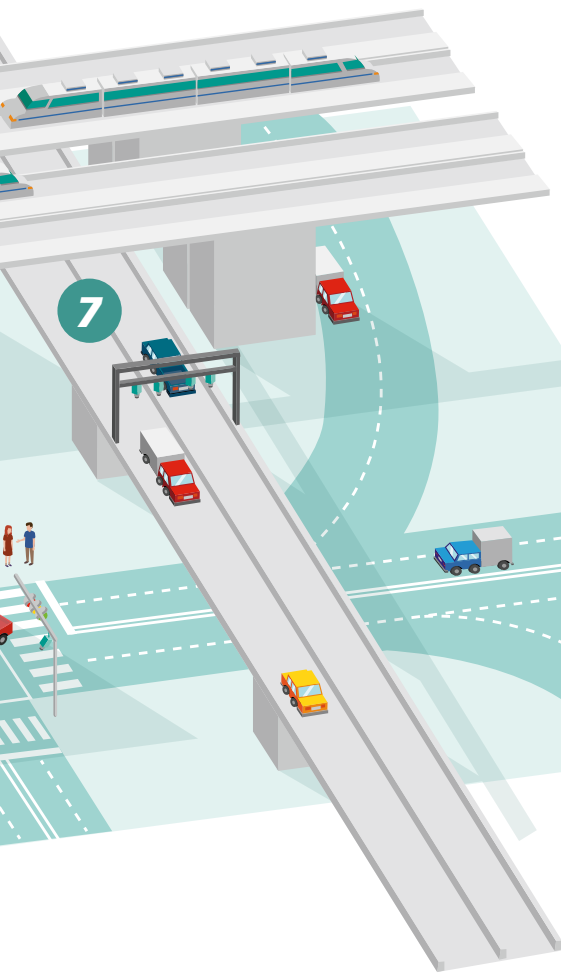

1

Rolling Stock Solution

- Passenger information system
- CCTV system
- Infotainment system
- Vehicle monitoring system

2

Wayside Control Solution

- Wayside signaling
- Interlocking system
- Train control system

3

Integrated Supervisory Control System

- Building automation system
- Fire alarm system
- Passenger information system
- CCTV system

4

Automatic Fare Collection Solution

- Automatic gate machine
- Ticket vending machine

5

Intelligent Video Analytics Solution

- Traffic management surveillance system
- License plate recognition system

6

Traffic Management Solution

- Signal control management
- Road condition monitoring
- Emergency system

7

Highway Management Solution

- Electronic toll collection system
- Bridge & tunnel monitoring
- Traffic flow control & analysis

Panel Controller

- ITA-8000 Series &
TPC-8100
- EN 50155 certified HMI

Railway Ethernet Solutions

- EKI-9500 Series
- EN 50155 certified switches

Roadway Ethernet Solutions


- EKI-7700 & MiniMc Series
- Roadway network communications

Wireless Solutions

- WISE/Wzzard/SmartFlex
- Transportation wireless communications

Cloud-enabled Energy & Environment Solutions

Nowadays, energy and environment practices have evolved to remote management using cloud services. To accelerate our customers' time-to-market, Advantech offers Solution Ready Package (SRP) based on our hardware/ software products and domain experience. With Machine-to-Intelligence (M2I) SRP, equipment builders can easily connect operating data to the cloud. By integrating M2I SRPs into vertical system SRPs, SIs enjoy the benefits of remote management, operations, and maintenance.

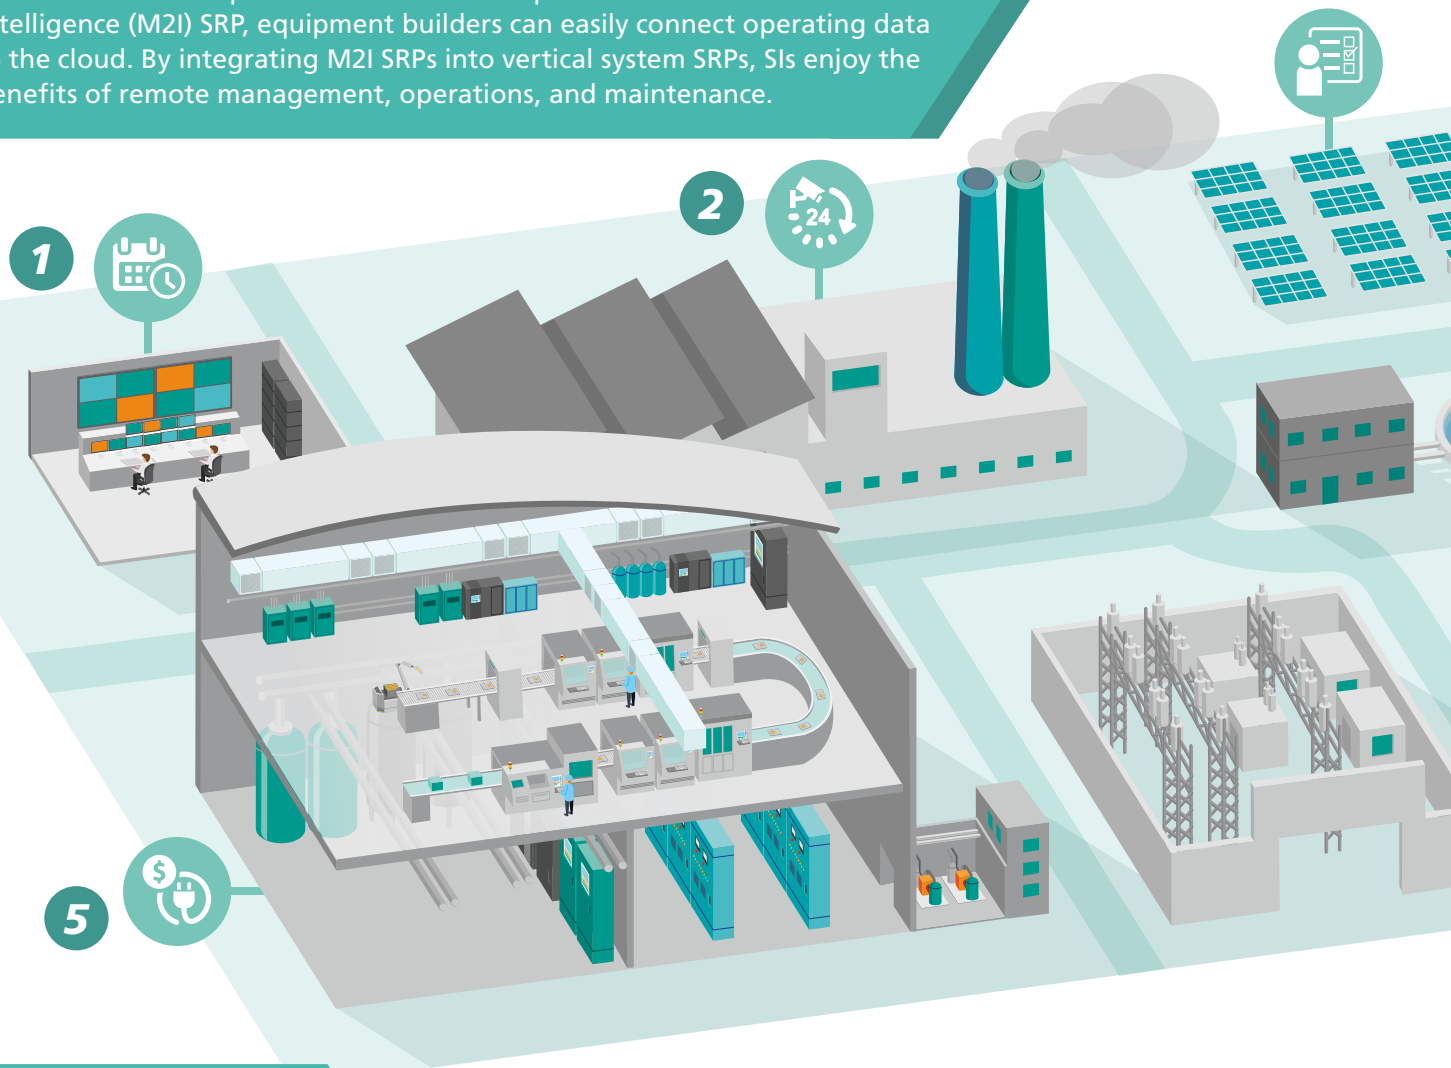

Product Solutions

Vertical Application System SRP



Energy Management Solution

- Energy consumption visualization and analysis for optimization



Solar Power Management Solution

- Centralized operation with unmanned remote sites




Indoor Air Quality Management Solution

- Management solution continuous indoor air quality monitoring and analysis



Water Management Solution

- Cloud-enabled remote equipment monitoring for water and wastewater treatment

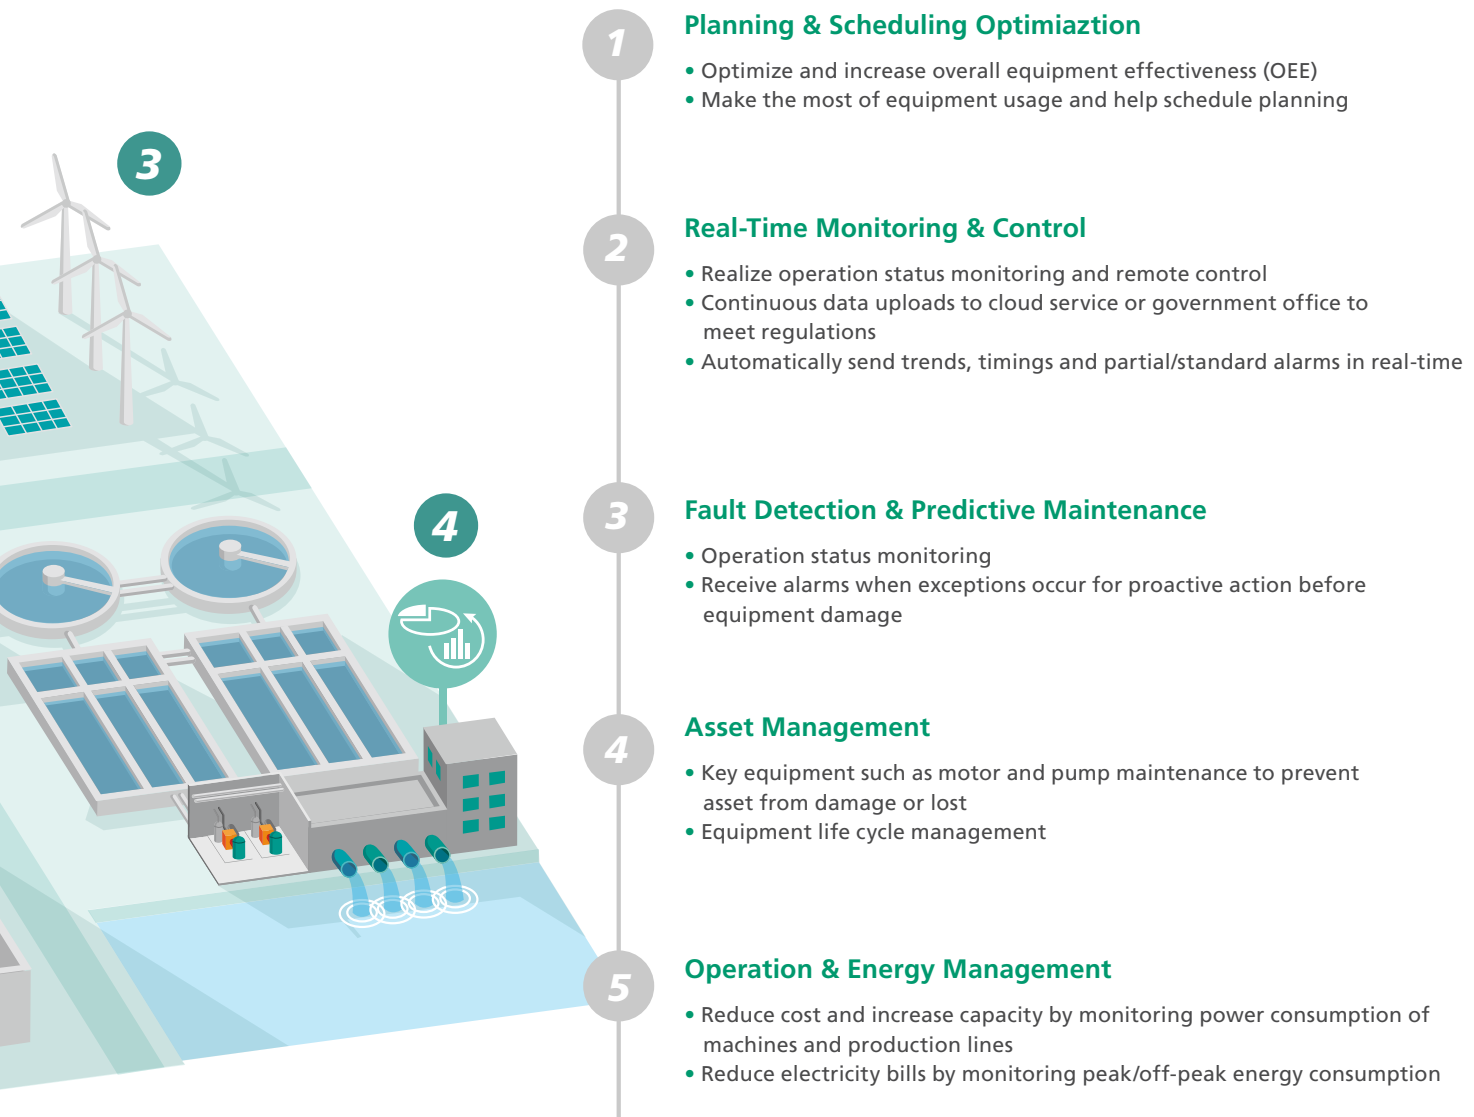

Machine-to-Intelligence (M2I) SRP



Distributed Solar Power Data Acquisition

- Reliable data acquisition for solar power markets



HVAC & Heater E&E M2I SRP

- Remote monitoring and centralized management for HVAC and heater



Mobile Power Generator E&E M2I SRP

- Remote monitoring and centralized management for mobile power generator




Water Pump E&E M2I SRP

- Remote monitoring and centralized management for water pump

Enabling IoT Edge Intelligence with WISE-PaaS

In the era of IoT, billions of sensing devices are distributed in factories, power plants, water treatment plants, transportation, healthcare, and retail industries for environmental monitoring, surveillance and more. Big data analysis improves accuracy, efficiency, and productivity. Intelligence is ubiquitous and inevitable. Advantech launched the WISE-PaaS edge intelligence platform to provide total solutions to system integrators and manufacturers, enabling real IoT powered business models in various vertical markets.

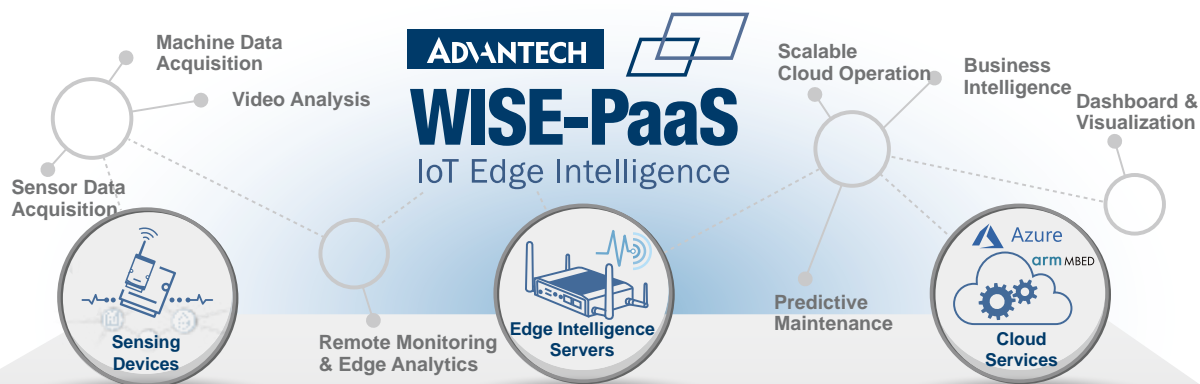

WISE-PaaS/AFS WISE-PaaS/Dashboard WISE-PaaS/SaaS Composer

WISE-PaaS/EnSaaS is a cloud-based software platform designed to empower cloud services. It provides a highly secure, multi-tenancy architecture with automatic expansion to create a highly robust data platform for Advantech's domain-focused cloud services or customer's own cloud services.

WebAccess Industrial Data Acquisition and Visualization

WebAccess/SCADA WebAccess/CNC WISE-PaaS/EdgeLink
WebAccess/NMS WebAccess/MCM WebAccess/HMI

WebAccess is the core of Advantech's industrial IoT solutions for data acquisition, analysis, and visualization. WebAccess supports open interface APIs for secondary development and enterprise-level system integration.

WISE-PaaS/VideoSense Intelligent Video and Multimedia Management

WISE-PaaS/VideoCMS WISE-PaaS/SignageCMS
WISE-PaaS/HumanDetectAI

WISE-PaaS/VideoSense is a service platform for intelligent video analytics that collects sensor data, performs video analytics, data visualization, and dispatches files through a central management system.

WISE-PaaS/EdgeSense Edge Intelligence and Sensing Integration

WISE-Agent WISE-PaaS/RMM WISE-PaaS/OTA
WISE-PaaS/Security

WISE-PaaS/EdgeSense is an edge intelligence and sensing integration software solution that incorporates sensor data aggregation, edge analytics, cloud applications, and security management for real-time device-to-cloud operational intelligence.



WISE-PaaS VIP Program

ADVANTECH
WISE-PaaS
IoT Edge Intelligence

VIP Program

WISE-PaaS provides a range of software and cloud-based service solutions that enable IoT in every layer and every vertical domain. Join Advantech's WISE-PaaS Alliance to become a special VIP, and enjoy IoT success with Advantech.

1

Software and Industry Solutions

- 1-2 WISE-PaaS/IIoT & WebAccess Software
- 1-5 iFactory & M2I/CNC Solution Ready Package
- 1-7 E&E & M2I/E&E Solution Ready Package
- 1-9 Intelligent Motion Control and Machine Vision
- 1-20 Power & Energy Solution
- 1-24 Intelligent Transportation Platforms



WebAccess Software

Introduction

The recent emergence of the Internet of the Things (IoT) and its surround technology eco-system promises significant future business opportunities until the year 2025. With more and more investment going into developing integrated IoT applications and cloud services, software has become the crucial factor for success in the IoT era.

As one of its core IoT solutions, Advantech's WebAccess offers not only a human-machine interface (HMI) and supervisory control and data acquisition (SCADA) software solution, but also an IoT software framework that serves as a software platform for IoT and cloud applications.

With Advantech WebAccess, a comprehensive browser-based IoT application software, users can easily monitor and manage projects via a web browser. For the IoT device layer, Advantech WebAccess supports multiple protocols and drivers for connecting up to 350 controllers and devices, making WebAccess a flexible and suitable software platform for all I-IoT applications and projects. Additionally, WebAccess provides a foundation for IoT data collection and management with its open architecture and open interfaces, which facilitate the development of various vertical applications.

To satisfy demands for industrial IoT (IIoT) and Industry 4.0 services, a variety of cloud-specific features, such as plug-and-play device configuration, cloud-based dashboards, and big data connectivity, are included in the WebAccess Cloud software package in an effort to provide an easy tool for connecting IoT devices and conducting big data analysis and predictive maintenance.

WebAccess Architecture




WebAccess Focused Solutions

Factory Automation Solution




- Water system: raw water supply, ultra pure water supply, waste water treatment, and reclamation
- Electricity power system: 220/110 KV high voltage power monitoring, emergent power generator, dynamic/static uninterruptible power supply, electric bus, high voltage switch gear, and low voltage power meter
- Gas system: toxic gases detection, gas cabinet operation, valve box operation, and general gases
- HVAC system: clean room operation, acid exhaust, process cooling water, and general air-conditioning

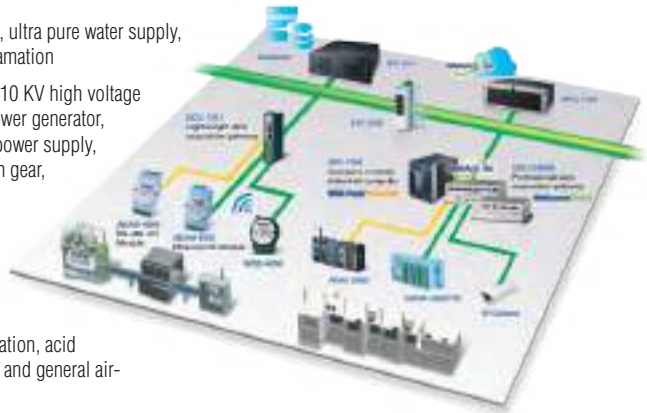

Water Treatment Solution




- Water resource distribution system
- Raw water distribution system
- Large-scale water supply pumping system
- SCADA system for tap water
- Booster pump station monitoring and control system
- Urban tap water pipeline monitoring control system
- City pipeline distribution optimization system
- Remote management system for city sewage pipelines
- Monitoring and control system for sewer pump stations.
- SCADA system for large sewage plant
- Performance management for large sewage plan

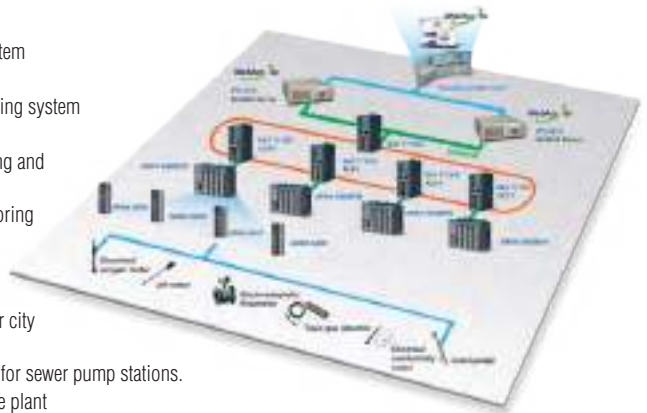

Oil & Gas Solution




- WebAccess is used to collect and manage data transmissions from RTUs to provide an analysis tool for monitoring the operating status of oil wells
- For oil pipeline monitoring, WebAccess serves as gateway software for converting data from each gateway device into the standard protocol before transmission to the control center
- Communicating with intelligent devices, WebAccess acts as remote control software for monitoring and controlling devices in the field

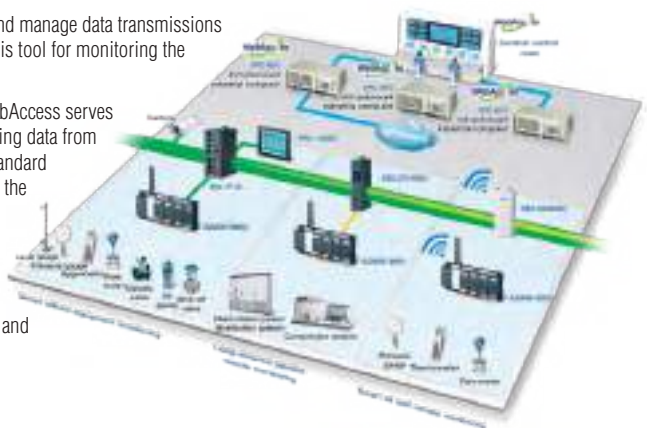

Building Energy Management Solution



- Stand-alone buildings
 - Commercial buildings, hospitals, restaurants, and office buildings
- Building complexes
 - Franchised restaurants, shopping malls, furniture stores, shoe stores, supermarkets, book stores, and convenience stores
 - Financial groups, shopping centers, campuses, and telecommunication stations

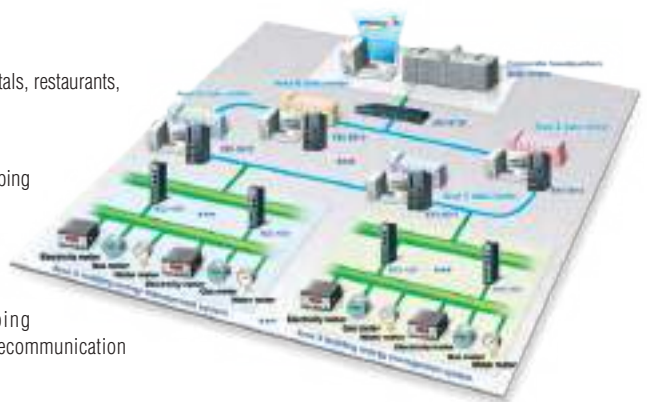

- 1 Software and Industry Solutions
- 2 Industrial Server
- 3 Intelligent System
- 4 Intelligent HMI and Monitors
- 5 Automation Computers and Controllers
- 6 Industrial Communication
- 7 Remote I/O Modules
- 8 Industrial I/O and Video Solutions

Enabling IoT & Industry 4.0 with WISE-PaaS Alliance and WebAccess

Introduction

Advantech's key strategies for the next decade are to provide integrated IoT solution platforms. The Advantech WISE-PaaS Edge Intelligence Platform offers a diverse range of software that can be applied and integrated into domain-focused SRPs. This platform provides a wide range of software and cloud-based service solutions from industrial data/video acquisition, analysis, and visualization to cloud platform services and dashboard functions, thus enabling IoT at all system layers and realizing IoT-powered business models in various vertical markets. Join Advantech's WISE-PaaS VIP program and enjoy IoT success by leveraging WISE-PaaS's comprehensive solutions.



WebAccess/SCADA

WebAccess/SCADA

Industrial IoT Application Software Platform

- Enables 100% web-based remote engineering, monitoring, and control
- Driver support for major PLCs, PACs, I/O modules, CNCs, network switches, and computer platforms
- Redundant SCADA, ports, and devices for high availability
- Supports multiple databases for data connectivity and data fusion
- HTML5-based dashboard for cross-browser, cross-platform data visualization and data analysis
- Provides flexible open interfaces for easy development and integration of third-party applications
- Plug-and-play functionality ready for private cloud solution
- Online software license authentication for cloud computing virtual machines



WebAccess/HMI

WebAccess/HMI

HMI Runtime Development Software

- Smart screen management
- Project-based management for multiple applications
- Software support for a diverse range of machines
- Provides efficient tools for easy customization
- Boosts performance with simulations
- Enhanced data security



WebAccess/CNC

WebAccess/CNC

CNC Machine Networking Solution

- Automatically generates CNC projects for WebAccess/SCADA software
- Supports CNC machine and I/O device monitoring
- Supports leading CNC network controllers
- Provides CNC machining status and PLC register monitoring
- Provides CNC availability queries and NC file transfer functionality
- Provides historical CNC alarm and operation queries
- Supports all features and full functions of WebAccess/SCADA software



WebAccess/MCM

WebAccess/MCM

Machine Condition Monitoring Software

- Dynamic signal acquisition and analysis
- Real-time monitoring and alarm notification
- Provides feature extraction algorithms for data processing
- Remote management for distributed monitoring solutions
- Integrated with WebAccess/SCADA
- Ensures easy setup without additional programming



WebAccess/NMS

WebAccess/NMS

Network Management System

- Cross-browser compatible
- Supports all Advantech Ethernet-based products
- Automatically generated topology
- PoE, ring, wireless, cellular connection indication



WISE-PaaS/EnSaaS

WISE-PaaS/EnSaaS

Platform for Enabling IoT Cloud Services

- Connect, monitor, and manage millions of IoT assets
- Managed SQL, NoSQL, and time-series databases for app developers
- Visualization dashboard for deriving actionable insights
- Quickly create powerful cloud apps using a fully managed platform

iFactory & M2I /CNC (Machine to Intelligence) Solution Ready Package Introduction

With the evolution of industrial automation, factories are getting smarter and more digital. To accelerate the implementation of smart manufacturing in industry 4.0, Advantech's iFactory Solution Ready Packages (SRP) and Machine to intelligence (M2I) solutions play critical roles in IOT integration from the network edge to the cloud.

iFactory SRPs



Advantech's iFactory SRPs allow for easily data acquisition from shop-floor modules via multiple communication protocols such as Modbus, OPC UA, and MQTT, and automatically display information on a real-time dashboard. Advantech's iFactory SRPs enable traditional factories to rapidly transform into streamlined, high-output, intelligent factories.

M2I/CNC SRPs



M2I solutions are cloud-based solutions with a wide-range of industrial app services in order to make machines accessible for intelligent connection, monitoring, and predictive maintenance. M2I SRPs aim to optimize the efficiency of intelligent machines for automation and manufacturing operations.

M2I/CNC Software Diagram



iFactory & M2I/CNC Solutions

M2I/CNC Intelligent CNC Machine Management Solution

Visual OEE and Cross-Factory CNC Management empowered by Cloud-Service

M2I/CNC solution provides an essential SRP for CNC machine real-time production monitoring, alarm report, and availability analysis. With a strong focus on CNC machine monitoring, this package can be applied to enable efficiency and utilization of Intelligent CNC machine management.

Key Features:

- Cloud-based service: equipped with cloud-based industrial apps enable a convenient cross-factory management in CNC machines and apply to multiple scenarios.
- Real-time production overview with processing details: using visual dashboard for production monitoring in both production lines and single machine to optimize processing operation.
- Alarm Management for Machine Monitoring: Top machine error messages, ranking and duration record help to identify key issues and optimize with alarm management.



Equipment Connectivity Solution

Achieve Real-time Machine Control with Advantech's CODESYS Solution

Advantech's CODESYS solution enables flexible real-time machine control programming for a wide range of factory automation operations, including motion and vision control, and pick and place machine control. Featuring a softPLC design, Advantech's CODESYS solutions support multiple fieldbus protocols, specifically EtherCAT, CANopen, PROFINET, and EtherNET.

Key Features:

- Reduced development time: applications are integrated and can be edited using a single interface that supports all PLCopen IEC 61131-3 programming languages (FBD, LD, IL, ST, SFC).
- Real-time dual fieldbus data acquisition: supports real-time dual fieldbus data acquisition of PROFINET and EtherCAT communications.
- Real-time EtherCAT soft motion control: supports CODESYS certified PLCopen motion POCs for single or multi-axis movement of electronic CAMs/gears etc.



Overall Effectiveness Monitoring Solution (OEE)

Enable Intelligent Machine Management with a Real-time Dashboard

Overall equipment effectiveness (OEE) refers to the percentage of planned production time that is truly productive. Advantech's OEE solution optimizes operations for convenient real-time machine monitoring including status change, availability, and downtimes as key indicators. With real-time data on a dashboard, machine availability can be monitored and machine downtime managed to improve operational efficiency.

Key Features:

- Automatic recording of machine status: real-time machine status (downtimes, availability, duration), data acquisition from wireless shop-floor modules, automatic uploads to server.
- Suitable for general use: easily apply to general machines with stack lights with non-invasive tools in production lines.
- Real-time dashboard for analysis: visual dashboard provides machine availability, downtime alarms, and streamlined balance rates.



Process Visualization Solution

Enhance Productivity with ThinManager Thin-Client Solution

ThinManager solution is developed based on thin client options that are fully compatible with Rockwell Automation's ThinManager software. ThinManager series solutions provide a sustainable and scalable automation platform for boosting productivity by increasing production efficiency and minimizing system downtime through centralized management.

Key Features:

- Centralized client management: all server applications and thin client devices can be managed from a centralized control room using a single interface.
- Advanced data security: ThinManager software features powerful visualization, encryption, and authentication to ensure data security.
- Multi-tasking with visualization: superior visualization with virtual screening can be displayed including multi-monitors, multi-sessions and screen tiling functions.



Energy & Environment Solution Ready Package

Energy and Environment Solution Ready Package Overview

As energy and environment issues are important concerns for the public, Advantech has developed solution ready packages (SRP) for energy and environment applications with industrial IoT technologies focusing on the process of sensing, control monitoring, remote communication, and smart data management. By combining these technologies with WebAccess and WISE-PaaS edge intelligence platform that performs information integration and data analysis, our SRPs are designed to be widely used in a wide variety of energy and environment industries.

Remote Equipment Monitoring and Efficiency Optimization

Each energy and environment SRP is integrated with intelligent sensing, communication, and real-time analysis capabilities that allow users to obtain the operating status of any machine at any time to ensure efficient resource usage.

Event Monitoring for Real-Time Alarms

With 3G/4G communication technology, event alerts can be transmitted in real-time from remote sites to the control center, allowing field personnel to respond promptly to minimize accidents and losses.

Remote Equipment Diagnostics and Predictive Maintenance

Collates operating status data from key components, thereby increasing equipment life, while reducing maintenance costs.

Visualized and Integrated WISE-PaaS Cloud Platform

Integrated data is gathered from a wide area and big data analysis and information visualization provides management level intelligence for decision-making to optimize operational efficiency.

Machine to Intelligent Solution and Management

Advantech energy and environment Machine-to-Intelligence (M2I) SRP allows equipment builders to easily overview the operational status of their machines and facilities. Advantech offers various M2I solutions based on market demands.

- 1 Software and Industry Solutions
- 2 Industrial Server
- 3 Intelligent System
- 4 Intelligent HMI and Monitors
- 5 Automation Computers and Controllers
- 6 Industrial Communication
- 7 Remote I/O Modules
- 8 Industrial I/O and Video Solutions

Energy and Environment Solution Architecture



Machine to Intelligence (M2I) Solution

With our Machine-to-Intelligence (M2I) SRP which includes power inverter, water pump, HVAC and transformer, equipment builders can easily get the operating status of their machines and facilities. By integrating different M2I SRP into vertical system SRP, system integrators can build up solar power, water treatment, and pollution management solutions, while opening up new opportunities in operation maintenance services to businesses in IIoT.




Energy Management Solution (EMS)

Advantech EMS integrates the hardware/software required to optimize energy efficiency. By collecting data from all energy-consuming devices and generating analysis reports, the solution enables management to identify excessive energy usage and implement improvements.

Key Features:

- Intuitive browser-based graphics dashboard.
- Energy consumption statistics and analysis tools.
- Simple management platform for easy maintenance.

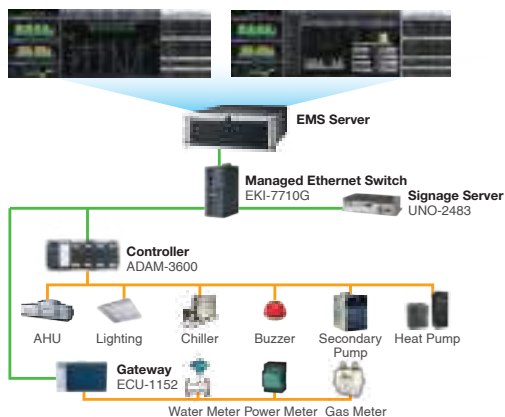


Solar Power Management Solution (SPMS)

Advantech SPMS aims to improve the efficiency of power generation and reduce the cost of operations and maintenance. With the help of high performance integrated hardware/software, our SPMS solution is able to realize accurate data acquisition, perform remote management, and analyze mass data from all power stations.

Key Features:

- Centralized operation with unmanned remote sites.
- Scalable architecture which works in plants of any size.
- Analyzing and optimizing power station efficiency.

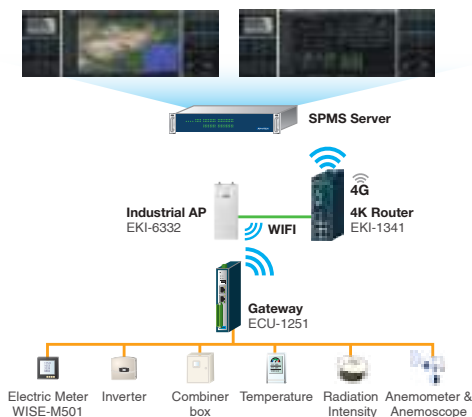

Motion Control Overview

Motion Control Solutions

Advantech intelligent motion control product division provides solutions to OEM machine makers and system integrators. The core technologies are based on state-of-art DSP/FPGA/ SoC processors, Advantech's own softmotion kernel for trajectory and control, EtherCAT motion bus, and configuration utilities. With our softmotion kernel, users can leverage the new, high performance computing hardware and latest application functions supported in the kernel, to enhance machine features and performance. With the support of EtherCAT open standard protocol, users can leverage high speed cycle times for high performance synchronous motion control, and the Ethernet cable connection saves wiring costs.

Application-Ready Embedded Motion Control


In any vertical specific application, customers are looking for application-ready control platforms. The main reasons for this consideration are system integrity and system stability. Compared with plug-in motion controllers plus industrial PCs, application-ready motion control platforms provide well-integrated systems, pre-validated to guarantee stability. Furthermore, the concept of solution selling can bring higher add-on value to system integrators and machine builders.

Motion Control Technology

There are three basic types of motion control system: point-to-point, contouring, and synchronization.


Point-to-Point (PTP) Motion

Point-to-point (PTP) movement is the most basic form of motion control. The principle function of the PTP is to position the tool from one point to another within the coordinate system. It is used when precise start and stop position is important, but the path is irrelevant. Velocity, time, and acceleration can be defined for point-to-point moves, allowing the controller to construct either a T or an S-curve move profile.

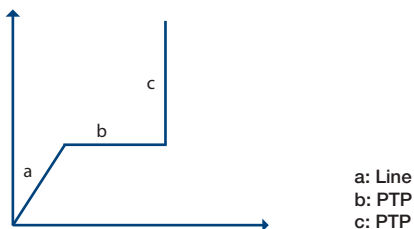


Contouring (Continuous Trajectory)

To achieve contoured motion, a series of points is provided during programming, and the motion controller extrapolates a smooth line or curve from these points. Unlike point-to-point motion, contouring guarantees that the system passes through each point, using either linear or circular interpolation. Between the points, linear or circular interpolation is performed, leading to a contour described by a succession of linear segments. In a contoured move, a time to complete the move is specified, but the actual move profile is determined by the motion controller.



Synchronization

All synchronization controllers follow the master/slave principle. Where the master can freely move with any motion profile under control of any speed curve and one or several slaves exactly follow the master motion in terms of position and speed. The control is based on incremental position feedback by means of encoders on both sides. Many applications just use a measuring wheel with encoder instead of a master drive. It is possible to preset every speed or gear ratio by means of adjustable impulse scaling factors.

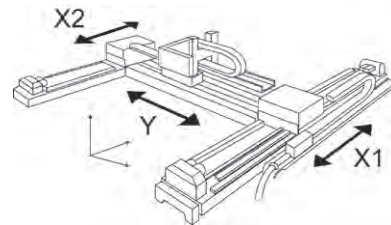

A Broad Array of Products for Motion Control

Advantech's full product offering accommodates all your motion control needs.

Point to point motion (PTP)

| Model | Type | Feature |
|-------------|-------|---------------------|
| PCI-1245L | Pulse | PTP |
| PCI-1245LI0 | Pulse | PTP + I/O Expansion |

Contouring (continuous trajectory)

| Model | Type | Feature |
|---------------|-------|------------------------|
| PCI-1245E/85E | Pulse | Path |
| PCI-1245V/85V | Pulse | Path + Compare Trigger |

Synchronization

| Model | Type | Feature |
|--------------------|----------|---------------------|
| PCI-1245/65/85 | Pulse | Synchronous Control |
| PCI-1203/PCIE-1203 | EtherCAT | Synchronous Control |

Motion Control Overview

EtherCAT

EtherCAT (Ethernet Control Automation Technology) is a high-performance, Ethernet-based fieldbus industrial network system. The protocol is standardized in IEC 61158 and applies to automation applications that need faster and more efficient communications. Short data update times with precise synchronization make EtherCAT suitable for real-time requirements in automation technology.

Functional Principle

In EtherCAT network, the Master sends Ethernet frames through all of the slave nodes. The Standard Ethernet packet or frame is no longer received, interpreted, and copied as process data at every node. Instead, slave devices read the data addressed to them and input data are also inserted in the same time while the telegram passes through the device, processing data "on the fly". Typically the entire network can be addressed with just one frame.




Data exchanges are cyclically updated between EtherCAT Masters and Slaves. Data in EtherCAT frames is transported directly within the IEEE 802.3 Ethernet frame using Ether type 0x88a4 and are processed by the EtherCAT slave controller on the fly. Each EtherCAT datagram is a command that consists of a header, data, and a working counter. The datagram header indicates what type of access the master device would like to execute:

Read, write, read-write

Access to a specified slave device through direct addressing

Access to multiple slave devices through logical addressing

Logical addressing is used for the cyclical exchange of process data. The header and data are used to specify the operation that the slave must perform, and the working counter is updated by the slave to let the master to know that a slave has processed the command. Every EtherCAT datagram ends with a 16-bit working counter (WKC). The WKC counts the number of devices that were successfully addressed by this EtherCAT datagram. EtherCAT datagrams are processed before receiving the complete frame. In the case that the data is invalid, the frame check sum is not valid and the slave will not set data for the local application.

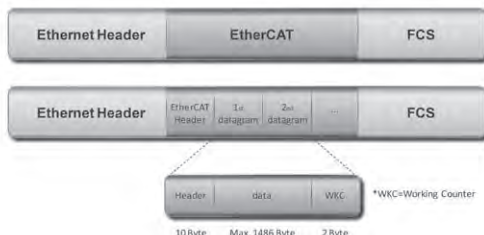

Topology

EtherCAT supports a variety of network topologies, including line, tree, ring, and star. The line and tree topologies are more conducive to fieldbus applications because they require fewer connections and utilize a much simpler and more flexible cabling schema that switches and hubs are not necessary for lines or trees topology. Inexpensive industrial Ethernet cable can be used between two nodes up to 100m apart in 100BASE-TX mode. EtherCAT makes a pure bus or line topology with hundreds of nodes possible without limitations. Up to 65,535 devices can be connected to EtherCAT, so network expansion is almost unlimited.

EtherCAT supports individual nodes to be connected/disconnected during operation. If one of the slaves in the network is removed, the rest of the network can continue to operate normally. EtherCAT also enables other communication features such as cable redundancy or master redundancy with Hot Standby.


Synchronization

Distributed clocks (DC) mechanism provides highly precise time synchronization between slaves in an EtherCAT network, which is equivalent to the IEEE 1588 Precision Time Protocol standard. By using distributed clocks, EtherCAT is able to synchronize the time in all local bus devices within a very narrow tolerance range. All EtherCAT slaves are provided with an internal clock (system time/local time). One EtherCAT slave is used as a reference clock and distributes its clock cyclically.

Possible misalignment between the reference clock and the clocks of the other slaves are caused when a slave is switched on and the internal free-running register that holds the current time is reset to zero. Unfortunately, this action doesn't happen at the same time, and this result in an initial offset among clocks that has to be compensated.

Typically, masters send a broadcast to all other slaves in the system. Having received the message, slaves will latch the value of their internal clock. There are two latch values, one is receiving, and the other is returning back. Thus, the master can read all latched values and calculate the delay for each slave. Delays will be stored into an offset register. In the following, the master will send a message periodically to all other slaves in the EtherCAT network to make the first slave the reference clock and forcing all other slaves to set their internal clock by the calculated offset. Because synchronization between slaves in DC mode is done by internal clocks in hardware, EtherCAT guarantees the time jitter is less than 1µs.

Diagnosis with Exact Localization

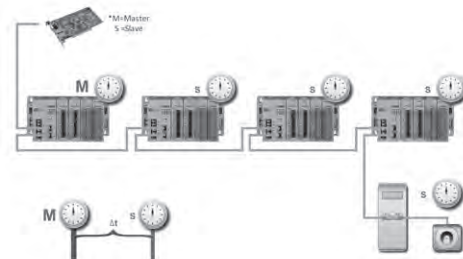

EtherCAT is an ultra-fast I/O system. To reach the best high-speed communication, high communication accuracy is demanded. EtherCAT comprises a wide range of systems with inherent diagnostic features which help detect and locate system errors precisely. Every EtherCAT datagram ends with a 16-bit working counter (WKC) to count the number of devices that were successfully addressed by this EtherCAT datagram. The Master can check the data exchange situation by WKC in the same cycle and the error frame can be detected by analyzing the nodes' error counters. The slave application will be executed only as the frame is received correctly. The automatic evaluation of the associated error counters enables precise localization of critical network sections.

Bit errors during transmission are detected reliably by the analysis of the Cyclic Redundancy Check (CRC) check sum. CRC is an error-detecting code commonly used in digital networks and storage devices to detect accidental changes to raw data. In addition to error detection and localization protocols, transmission physics and topology of the EtherCAT system allows an individual quality monitoring of every single transmission path.

SoftMotion Introduction

Advantech's SoftMotion Introduction

SoftMotion is Advantech's important core technology in the equipment automation field. Compared to ASIC motion control solutions, Advantech's Machine Automation Team independently developed its own SoftMotion control technology and uses the FPGA (Field Programmable Gate Array) and DSP (Digital Signal Processing) as the core-computing hardware platform. Because of SoftMotion excludes the inherent limitations of ASIC specifications, Advantech is able to offer the expertise of professional motion control for our customers and provides custom firmware to optimize device control as well as to minimize the need for additional programming. Through SoftMotion technology enhancements, Advantech offers critical technologies in EMA (Electronic Machine Automation) and TMA (Traditional Machine Automation) fields. Meanwhile, based on the three motion control architectures (centralized, distributed and embedded), Advantech's comprehensive product offering helps our customers to continuously progress their technologies to create win-win opportunities.

SoftMotion Function Table

| Item | Description | PCI-1220U | PCI-1240U | PCI-1245L | PCI-1245LIO | PCI-1245E PCI-1285E | PCI-1245V PCI-1285V | PCI-1245 PCI-1265 PCI-1285 | PCI-1203 (6/10/16/32axis) | PCI-E-1203L-64AE (64axis) |
|-------------------------|--------------------------------------|------------------------------------|---------------|---------------|-------------|--------------------------------|--|--|--|--------------------------------|
| Motion Control Function | Single-Axis Motion | JOG Move | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | | MPG | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | - | - |
| | | T&S-curve speed profile | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | | Programmable acc. and dec. | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | | Point to point motion | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | | Position / Speed Override | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | | Velocity motion | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | | Backlash compensation | - | - | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | | Superimposed move | - | - | - | - | - | ✓ | ✓ | - |
| | | Stop | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Multi-Axis Motion (Group) | up to 4 groups | 1 Group | 1 Group | 1 Group | 2 / 4 Group | 2 / 4 Group | 2 / 3 / 4 Group | 6 Group | 6 Group |
| | | Line | 2 axis | 2/3 axis | 2 axis | 2/3 axis | 2/3 axis | 2/3 axis | 2/3 axis | 2/3 axis |
| | | 2-axes Circular | ✓ | ✓ | - | - | - | ✓ | ✓ | - |
| | | Speed Override | - | - | - | - | ✓ | ✓ | ✓ | 2/3 axis |
| | | Helical | - | - | - | - | - | ✓ | ✓ | - |
| | | Pause & Resume | - | - | - | ✓ | ✓ | ✓ | ✓ | - |
| | Home | 16 home mode | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Motion Trajectory Planning | Table | ✓ | ✓ | - | - | 3 tables (10K points)/ 4 tables (7K points) | 3 tables (10K points)/ 4 tables (7K points) | 3 tables (10K points)/ 4 tables (7K points) | 6 tables, size: 7k points |
| | | Start / End motion list | ✓ | ✓ | - | - | ✓ | ✓ | ✓ | - |
| | | line trajectory: up to 8 axes | 2-axis | 2/3-axis Line | - | 2/3-axis Line 2-axis Direct | 2-axis Line/Direct | 2/3-axis Line, 2~8 axis Direct | 2/3-axis Line, 2~8 axis Direct | 2/3-axis Line, 1~8 axis Direct |
| | | Add arc trajectory (2/3-axis) | ✓ | ✓ | - | - | ✓ | ✓ | ✓ | - |
| | | Add Dwell | - | - | - | ✓ | ✓ | ✓ | ✓ | - |
| | | Start/Sop/Repeat | ✓ | ✓ | - | - | ✓ | ✓ | ✓ | - |
| | | Auto Blending | - | - | - | - | - | ✓ | ✓ | - |
| Application Function | Gantry | Master & Slave Synchronized motion | - | - | - | - | - | ✓ | ✓ | - |
| | Speed Forward | Master & Slave Synchronized motion | - | - | - | - | - | ✓ | ✓ | - |
| | Tangential Following | | - | - | - | - | - | ✓ | ✓ | - |
| | E-Gear | | - | - | - | ✓ | ✓ | ✓ | ✓ | - |
| | E-CAM | | - | - | - | - | - | ✓ | ✓ | - |
| | Error check | Error status, Watchdog | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Position Window trigger | Position window output | - | - | - | - | - | ✓ | ✓ | - |
| | Position Latch | Position Latch Information | - | - | - | - | ✓ | ✓ | ✓ | - |
| | Multi-axis Simultaneous Start / Stop | Simultaneously Start/Stop | - | - | ✓ | ✓ | - | ✓ | ✓ | ✓ |
| | PT/PVT | Position/ Velocity/Time Planning | - | - | - | - | - | - | ✓ | - |
| Interrupt | Axis Interrupt | Position/ Torque Limit | - | - | - | - | - | - | ✓ | - |
| | | Axis Stop | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | | Axis Compare | ✓ | ✓ | - | - | - | ✓ | - | - |
| | | Axis Error | - | - | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | | Axis Latch | - | - | - | - | - | ✓ | ✓ | ✓ |
| | | Axis VH Start | - | - | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | | Axis VH Stop | - | - | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Group Interrupt | Group Stop | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | | Group VH Start | - | - | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Trigger Function | Single Compare | Up to 8 channels | ✓ (2 Channel) | ✓ (2 Channel) | - | - | 4 / 8 Channel | 4 / 6 / 8 Channel | - | - |
| | Table Compare | Up to 2 channels | ✓ | ✓ | - | - | ✓ | ✓ | - | - |
| | Linear Compare | (Table size: 100K points) | ✓ | ✓ | - | - | ✓ | ✓ | - | - |
| Device DIO | DAQ | DIO | - | - | - | 16DI, 16DO | - | 8DI, 8DO (PCI-1265) | - | - |
| Device AI | DAQ | AI | - | - | - | - | - | 2 AI (PCI-1265) | - | - |

- 1 Software and Industry Solutions
- 2 Industrial Server
- 3 Intelligent System
- 4 Intelligent HMI and Monitors
- 5 Automation Computers and Controllers
- 6 Industrial Communication
- 7 Remote I/O Modules
- 8 Industrial I/O and Video Solutions

Motion Card Product Selection Guide

Centralized Motion Control Solutions



| Category | | Motion Control | | | | | | Motion Control | |
|--------------------|-------------------------------|----------------|-----------|-----------|-----------|-------------|------------------------|------------------------|----------------------------------|
| Bus | | PCI | | | | | | PCI | |
| Model | | PCI-1220U | PCI-1240U | PCI-1243U | PCI-1245L | PCI-1245LIO | PCI-1245E PCI-1285E | PCI-1245V PCI-1285V | PCI-1245 PCI-1265 PCI-1285 |
| Axis | Number of Axis | 2 | 4 | 4 | 4 | 4 | 4/8 | 4/8 | 4/6/8 |
| | Linear Interpolation | ✓ | ✓ | - | ✓ | ✓ | ✓ | ✓ | ✓ |
| | 2/3-axis Circle Interpolation | ✓ | ✓ | - | - | 2-axis | - | ✓ | ✓ |
| Advanced Functions | Encoder Channels | 2 | 4 | - | 4 | 4 | 4/8 | 4/8 | 4/6/8 |
| | Limit Switch Input Channels | 4 | 8 | 8 | 8 | 8 | 8/16 | 8/16 | 8/12/16 |
| | Home Input Channels | 2 | 4 | 4 | 4 | 4 | 4/8 | 4/8 | 4/6/8 |
| | Emergency Stop Input Channels | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| | Slow Down Limit Switches | 4 | 8 | - | 8 | 8 | 8/16 | 8/16 | 8/12/16 |
| | General Purpose DI Channels | 6 | 12 | 8 | 16 | 32 | 16/32 | 16/32 | 16/32/32 |
| | Servo On Output Channels | 2 | 4 | - | 4 | 4 | 4/8 | 4/8 | 4/6/8 |
| | General Purpose DO Channels | 8 | 16 | 8 | 16 | 32 | 16/32 | 16/32 | 16/32/32 |
| | Analog Input Channels | - | - | - | - | - | - | - | 2 (PCI-1265 only) |
| | BoardID Switch | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Position Compare | ✓ | ✓ | - | - | - | - | - | ✓ |
| | Position Latch | - | - | - | - | - | - | - | ✓ |
| | Dimensions (mm) | 175 x 100 | 175 x 100 | 175 x 100 | 175 x 100 | 175 x 100 | 175 x 100 | 175 x 100 | 175 x 100 |



Embedded Machine Automation Solution



| Category | | Motion Control | Latch & Trigger | Encoder | |
|--------------------|-------------------------------|----------------|-----------------|-----------|-----------|
| Bus | | ISA | PCI | | ISA |
| Model | | PCL-839+ | PCI-1274 | PCI-1784U | PCL-833 |
| Axis | Number of Axis | 3 | 4 | - | - |
| | Linear Interpolation | - | ✓ | - | - |
| | 2/3-axis Circle Interpolation | - | - | - | - |
| Advanced Functions | Encoder Channels | - | 4 | 4 | 3 |
| | Limit Switch Input Channels | 6 | 8 | - | - |
| | Home Input Channels | 3 | 4 | - | - |
| | Emergency Stop Input Channels | - | 1 | - | - |
| | Slow Down Limit Switches | 6 | 8 | - | - |
| | General Purpose DI Channels | 16 | 4 (General) | 4 | 2 |
| | Servo On Output Channels | - | 4 | - | - |
| | General Purpose DO Channels | 16 | 4 | 4 | - |
| | Analog Input Channels | - | - | - | - |
| | BoardID Switch | - | ✓ | ✓ | - |
| | Position Compare | - | 12 | - | - |
| | Position Latch | - | 12 | - | - |
| | Dimensions (mm) | 185 x 100 | 175 x 100 | 185 x 100 | 185 x 100 |

| Model Name | | MVP-3245 |
|---------------|---------------------------|--------------------------------------|
| Chassis | Input Voltage | DC 24V |
| | Power | 24W MAX (1A @ 24V) |
| Hardware | CPU | Intel Atom E3825 1.33G dual-core |
| | Memory | 2G |
| | Storage | 32G mSATA |
| | Graphic | D-Sub15 Port |
| Communication | Ethernet | 2 x 10/100/1000 Mbps, RJ45 connector |
| | USB | 4 x USB 2.0 |
| | Serial | 2 x RS-232, DB9 connector |
| Physical | Dimensions (W x H x D mm) | 250 x 160 x 85 |

EtherCAT Solution Product Selection Guide

EtherCAT Master Control Card



| Model | | PCI-1203 | PCIE-1203L |
|--------------------|-----------------------------|--|--|
| Axis | | 6/10/16/32 | 64 |
| Advanced Functions | General Purpose DI Channels | 8 | - |
| | General Purpose DO Channels | 4 | - |
| | Remote Motion | 1024-CH DI and 1024-CH DO 128-CH AI and 128-CH AO | 1024-CH DI and 1024-CH DO 128-CH AI and 128-CH AO |
| | Remote I/O | 32 Servo Drive Max. | 64 Servo Drive Max. |
| Dimensions (L x H) | | 175 x 100 mm | 175 x 100 mm |
| Connectors | | 2 x RJ45, D-sub 15 | 2 x RJ45 |




| EtherCAT Slave | | | | | |
|-------------------------|-----------|-----------|-----------|-----------|-----------|
| Model | AMAX-4830 | AMAX-4833 | AMAX-4834 | AMAX-4856 | AMAX-4850 |
| Isolated Digital Input | 16 | 32 | - | 32 | 16 |
| Isolated Digital Output | 16 | - | 32 | 32 | - |
| PhotoMOS Relay Output | - | - | - | - | 8 |
| Relay Output | - | - | - | - | - |
| Analog Input | - | - | - | - | - |
| Analog Output | - | - | - | - | - |




| EtherCAT Slave | | | | | |
|-------------------------|-----------|-----------|-----------|-----------|-----------|
| Model | AMAX-4860 | AMAX-4855 | AMAX-4862 | AMAX-4817 | AMAX-4820 |
| Isolated Digital Input | 8 | 32 | 16 | - | - |
| Isolated Digital Output | - | - | - | - | - |
| PhotoMOS Relay Output | - | 16 | - | - | - |
| Relay Output | 8 | - | 16 | - | - |
| Analog Input | - | - | - | 8 | - |
| Analog Output | - | - | - | - | 4 |

Terminal Board & Cable Selection Guide

Motion Card

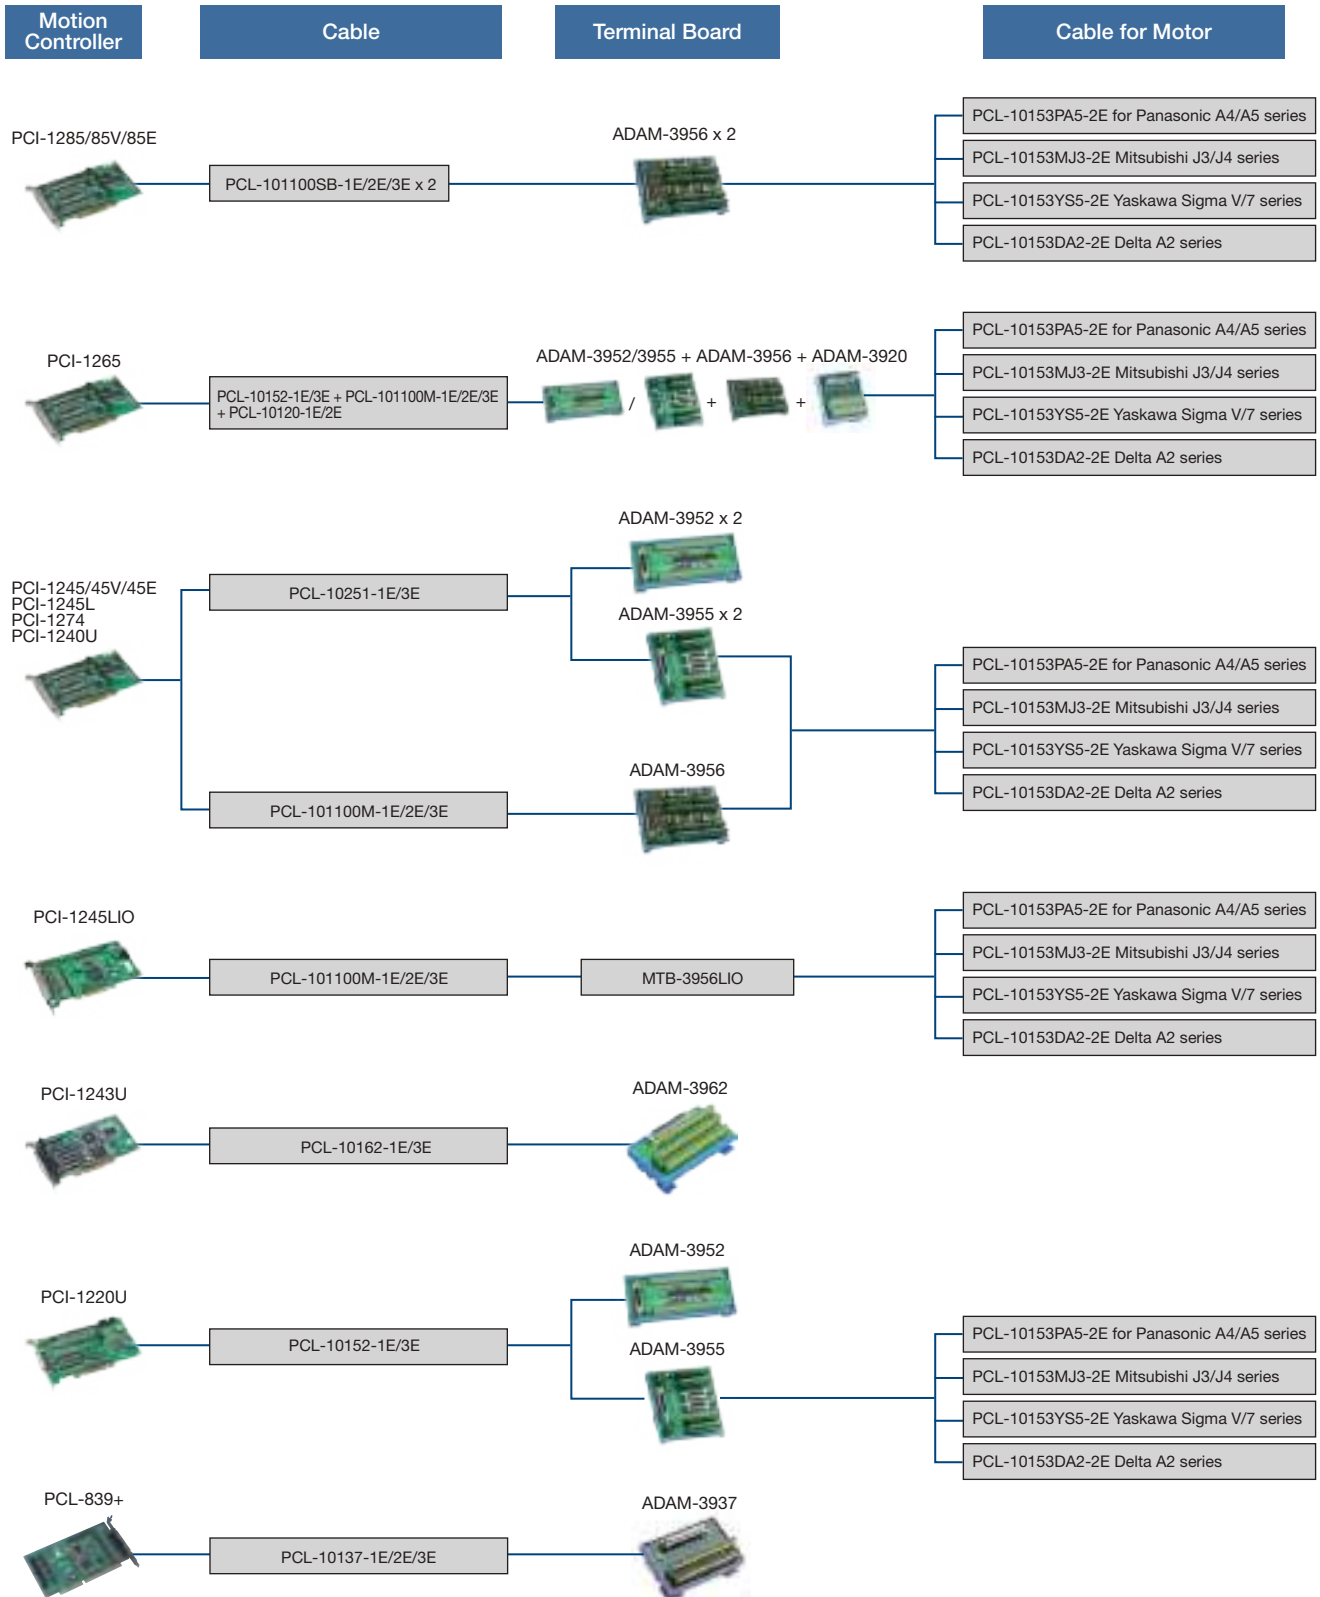

EtherCAT

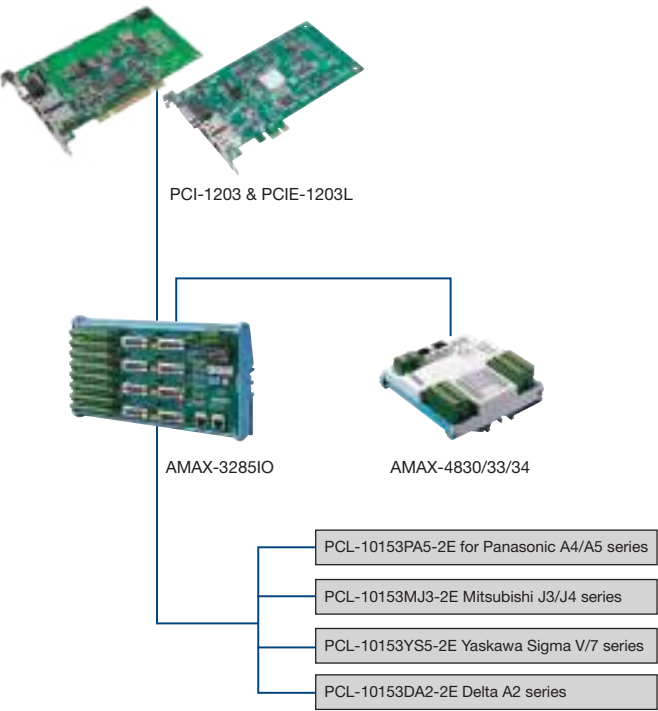

| | |
|---|--------------------------------------|
| 1 | Software and Industry Solutions |
| 2 | Industrial Server |
| 3 | Intelligent System |
| 4 | Intelligent HMI and Monitors |
| 5 | Automation Computers and Controllers |
| 6 | Industrial Communication |
| 7 | Remote I/O Modules |
| 8 | Industrial I/O and Video Solutions |

PC-based Programmable Motion Control Solutions

MAS Controller Introduction

The MAS controller is a PC-based programmable motion controller, which is developed using the Motion Studio software development tool. It features a range of built-in debugging tools, is programmed using BASIC programming language, can be easily integrated motion control and machine vision solution.

Open platform multi-axis controller


- Seamlessly integrated motion control, machine vision, I/O
- Open standard interface for communication, database

One Programming Tool - Motion Studio

- Easy to program with BASIC language to shorten learning curve
- Extensive debugging tools for machine control applications
- Faster to learn, program and service

Real-Time SoftMotion Kernel

- Max 6 axes interpolation, trajectory planning and tracking
- Rich motion functionalities for XYZ table, SCARA control

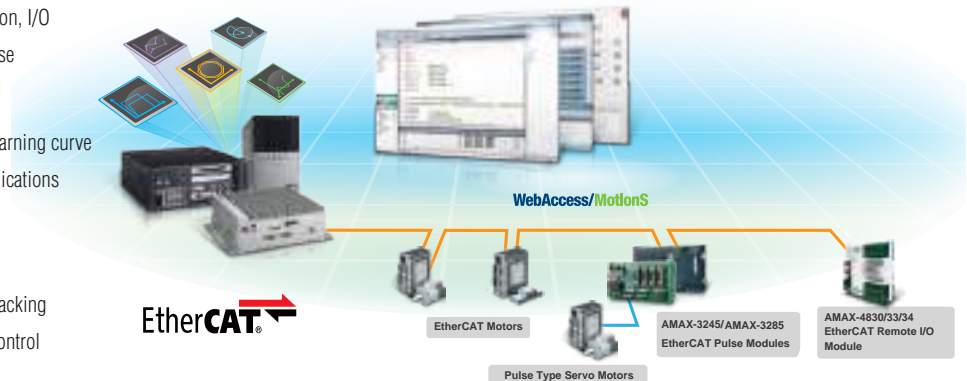

Motion Studio



A single programming tool for every aspect of an machine automation project minimizes training needs, solidifies overall integration and eliminates communication problems between engineering disciplines.


The user can easily program by BASIC programming language, using many debugging tools to help develop. Communicate with the outside hardware through controller's standard interface and connect to the database. In addition, users can also use the Motion Studio industry function block to quickly build a project, so as to improve the reusability, reduce the time of equipment development.

Debugging Tool

- Terminal
- Variable Watch
- I/O Viewer
- Motion test tool
- Parameter Viewer
- VR Management tool
- Breakpoint Operation
- Single Step Debugging
- C-integration
- 3D Path
- CAM Editor Tool
- Coding help

Function Blocks

- Cylinder control
- XYZ table/ SCARA control
- DXF
- Gcode
- Machine Vision Task
- Virtual Controller
- Programmable Encryption
- Path Link

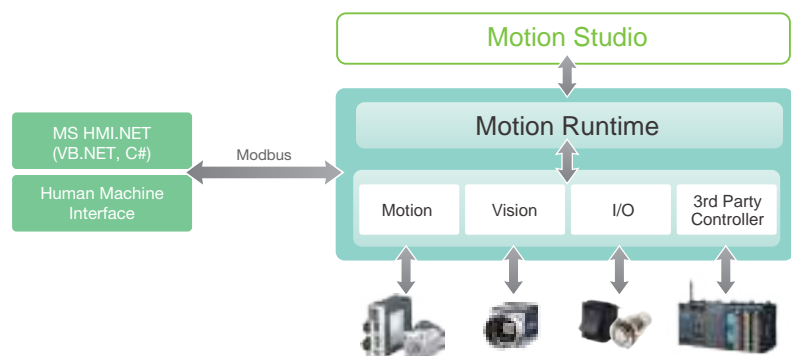

MAS Controller Product Selection Guide



1
Software and Industry Solutions

2
Industrial Server

3
Intelligent System

4
Intelligent HMI and Monitors

5
Automation Computers and Controllers

6
Industrial Communication

7
Remote I/O Modules

8
Industrial I/O and Video Solutions

| Mode | | MAS-3245-LG | MAS-5242-LG | MAS-5242-EG | MAS-5282-EG | MAS-5202-EG | MAS-5283-LG |
|------------------|---------------------------|---|------------------|------------------|------------------|------------------|------------------|
| OS | | WIN7 Embedded | WIN7 Embedded | WIN7 Embedded | WIN7 Embedded | WIN7 Embedded | WIN7 Embedded |
| CPU | | Intel Celeron J1900 | Inter Core I3 | Inter Core I3 | Inter Core I3 | Inter Core I3 | Inter Core I3 |
| Memory | | 4GB DDR3 | 4GB DDR3 | 4GB DDR3 | 4GB DDR3 | 4GB DDR3 | 4GB DDR3 |
| Storage | | mSATA 32GB | 500G | 500G | 500G | 500G | 500G |
| DI/O | | 32DI/32DO | 16DI/16DO | 16DI/16DO | 32DI/32DO | – | 32DI/32DO |
| Serial Ports | | 2 x RS232/422/485 | 2 x RS232 | 2 x RS232 | 2 x RS232 | 2 x RS232 | 2 x RS232 |
| LAN Ports | | 2 x 10/100/1000M | 2 x 10/100/1000M | 2 x 10/100/1000M | 2 x 10/100/1000M | 2 x 10/100/1000M | 2 x 10/100/1000M |
| USB 3.0 | | 1 x USB 3.0 | – | – | – | – | – |
| USB 2.0 | | 4 x USB 2.0 | 4 x USB 2.0 | 4 x USB 2.0 | 4 x USB 2.0 | 4 x USB 2.0 | – |
| Motion Functions | Number of Axis | 4 | 4 | 4 | 8 | 16 | 8 |
| | Encoder Channels | 4 | 4 | 4 | 8 | – | 8 |
| | T&S Velocity curve | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Linear Interpolation | 2/3-axis Linear | 2-axis Linear | 2/3-axis Linear | 2/3-axis Linear | 2/3-axis Linear | 2-axis Linear |
| | Circular Interpolation | 2-axis Circular | – | 2-axis Circular | 2-axis Circular | 2-axis Circular | – |
| | Helix Interpolation | ✓ | – | ✓ | ✓ | ✓ | – |
| | Continuous interpolation | ✓ | – | ✓ | ✓ | ✓ | – |
| | MPG&JOG | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Position Compare | ✓ | – | ✓ | ✓ | ✓ | – |
| | Position Latch | ✓ | – | ✓ | ✓ | ✓ | – |
| | Simultaneously Start/Stop | ✓ | – | ✓ | ✓ | ✓ | – |
| | E-Gear | ✓ | – | ✓ | ✓ | ✓ | – |
| | E-CAM | ✓ | – | ✓ | – | – | – |
| | Gantry | ✓ | – | ✓ | ✓ | ✓ | – |
| | Tangential Following | ✓ | – | ✓ | ✓ | ✓ | – |
| | Position window output | ✓ | – | ✓ | ✓ | ✓ | – |
| Motion Studio | Programming Language | Motion BASIC | | | | | |
| | Number of Task | 10 | | | | | |
| | Debugging Tool | Terminal; Variable Watch; I/O Viewer; Motion test tool; Parameter Viewer; VR Management tool; Breakpoint Operation; Single Step Debugging; C-integration; 3D Path; CAM Editor Tool; Coding help | | | | | |
| | Function Blocks | Cylinder control; DXF; Gcode; Virtual Controller; Programmable Encryption; | | | | | |

Machine Vision Introduction


Introduction

Machine vision is used in every manufacturing market, from food beverage, pharmaceuticals, automotive, semiconductor to general manufacturing, the human eye inspection and response is too slow and unreliable for the demanding manufacturing process nowadays, replacing human inspection with machine vision can go further in the automating factory operation, the majors applications are quality assurance, production automation and identification

The era of Industry 4.0 is upon us, the scope of the factory will change dramatically, not only the ability to produce, but to produce with the most flexibility and efficiency, machine vision plays an important role in achieving 100% quality control in manufacturing, reducing costs, increase flexibility and ensuring a high level of customer satisfaction to fit the demands of smart manufacturing.

The move from analog to digital is prevalent, and the GigE Vision become the most significant interface in this market, Advantech provides high performance GigE Vision solutions, an open PC-based architecture, including industrial camera, computing platform, frame grabber for the traceability, alignment, gauge, identification and inspection application to fulfill the requirements for versatile machine vision applications.

Selection Guide

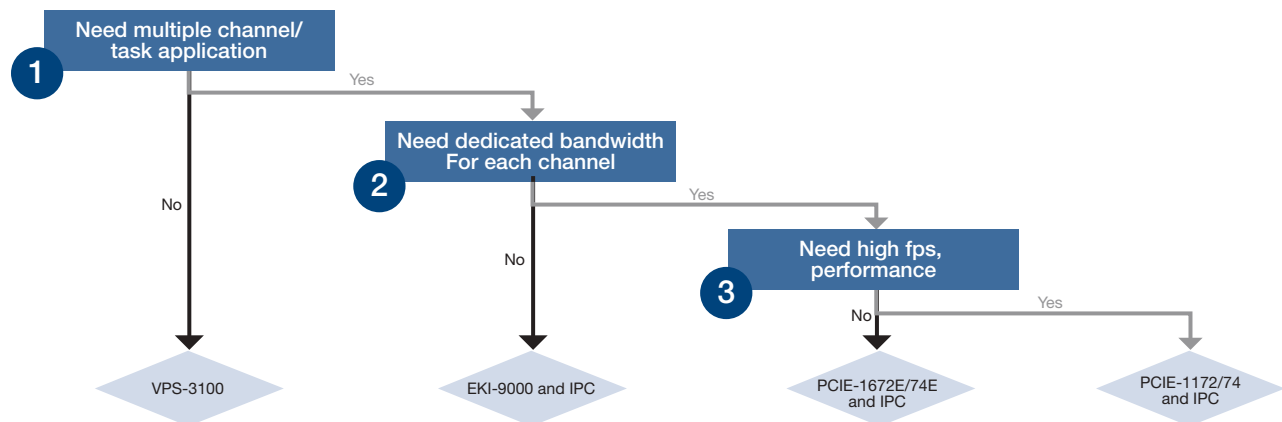

Application Stories

Backend semiconductor packaging inspection machines

The semiconductor industry has some of the most demanding applications, requiring a combination of extreme accuracy and precision combined with high throughput. Keeping up with innovations in packaging, the challenges to achieve this drastically increase. The fast-paced progress towards greater densities and finer dimensions are pushing the limits of vision systems.

Advantech suggested an intelligent GigE Vision frame grabber, DSP-based multi-axis motion control card and compact modularized system for direct integration in space-constrained machine to accomplish high-precision, high productivity IC packaging inspection. The solution adopts an industrial grade computer to combine PCIe-1174, four-channel intelligent GigE Vision frame grabber with include a dedicated FPGA (Field Programmable Gate Array) to reconstruct images before transmitting them in real time to the host PC via DMA (Direct Memory Access). This then frees up the host PC's processor and ensures there is no frame or packet loss during image acquisition.

Improve fabric quality in textile industry

Textile manufacturing is a very complex process. Weaving is the most basic process which involves interlacing a set of vertical threads (called the warp) with a set of horizontal threads (called the weft).

The new optical web inspection system can detect the warp thread break less one second and ease of use and maintenance. Accordingly, Advantech suggested the UNO-3283G, an Intel i7 Fanless Automation Computer with 2 x GbE, 2 x mPCIe, HDMI, DVI-I, and PCIe-1172, two channel intelligent GigE Vision frame grabber with include a dedicated FPGA (Field Programmable Gate Array) to reconstruct images before transmitting them in real time to the host PC via DMA (Direct Memory Access). This then frees up the host PC's processor and ensures there is no frame or packet loss during image acquisition. To further aid installation and maintenance, this series also includes the use of PoE (Power over Ethernet) and Ad Hoc protocol which, like DHCP, doesn't require a specific IP address and enables System Integrators (SI) to simply plug the camera in and go.

Implement the product traceability in food & beverage

As the market demand for food safety increases, traceability is getting more attention in the food and beverage industry as well as the packaging industry. One of the world's leading providers of beverage containers would like to identify the bar codes, characters and numbers on the ink-jet printing labels at a 7 unit per second run rate. Advantech provided the multiple camera, PC-based automated optical identification system to identify the bar code, data code, and the character on the beverage container, the system consists of AIIS-1240, 4-CH PoE compact vision system with Intel® Core™ i7 CPU; Inspector Express, a graphical user interface machine vision application software specifically designed to simplify the design and deployment of automated inspection on the factory floor; QCAM-GM0640-120CE, 0.3 Megapixel industrial camera, features with the PoE (Power over Ethernet) to simplify installation and maintenance.

Vision system and robotics ensure finished product quality in automotive industry

In the automotive industry, quality control is an extremely important part. Most of time, there are engineers to verify the interiors and exteriors, including dash board, door, seat, light, and color for the finished product quality check. In one of the largest automotive groups, there are about 100 items in the finished product check list and the client was looking for a quality check system to perform the inspection automatically. To automate the quality check of the parts in different vehicles, a flexible and extensible system had to be created, and due to numbers of characteristic, the system integrators designed the AOI (Automated Optics Inspection) system with multiple-camera and robots for high flexibility and efficiency. To satisfy this case, Advantech suggested PCIe-1674E, four channel GigE Vision frame grabber and QCAM-GM2500-014CE, 5.0 Megapixel industrial camera including PoE (Power over Ethernet) function, to simplify the installation and maintenance. Besides these, there are other products to help provide the client with the desired functionality. The UNO-3283G, an Intel i7 Fanless Automation Computer with 2 x GbE, 2 x mPCIe, HDMI, DVI-I, and the PC-1756, a 64-ch Isolated Digital I/O PCI Card for digital signal path to provide the total solutions in this case.

Machine Vision Selection Guide

Frame Grabbers



| Model Name | | PCIE-1172 | PCIE-1174 | PCIE-1672E | PCIE-1674E |
|----------------------|-----------------------------|---|--------------------|------------------|------------|
| Power Requirements | Input Voltage | 12 V _{DC} direct from PCIe slot, total Max. 18W or AT/ATX system power input | | | |
| | Overload Current Protection | Present | | | |
| | Connection | AT/ATX Power Jack | | | |
| | Output PoE Power | 48 VDC PoE Power output, total Max. 18W (total Max. 60W with AT/ATX system power input) | | | |
| Environment | Operating Temperature | 0 ~ 50°C (32 ~ 122°F) | | | |
| | Storage Temperature | -20 ~ 80°C (-4 ~ 176°F) | | | |
| | Operating Humidity | 5 ~ 95% RH | | | |
| Mechanics | Dimensions (W x D) | 185 x 110 mm (7.3" x 3.9") | | | |
| GigE Vision | Compatibility | IEEE802.3af | | | |
| | Speed | 1000 Mbps | | 10/100/1000 Mbps | |
| | No. of Ports | 2 | 4 | 2 | 4 |
| | Port Connector | 8-pin RJ45 | | | |
| | Bus Interface | PCI Express® x 4 | | | |
| | Jumbo Frame | 9KB | | | |
| | GigE Vision Offload Engine | ✓ | ✓ | – | – |
| Safety | ESD | 8KV (air), 4KV (contact) | | | |
| | EFT | 2 KV | | | |
| | Surge Protection | 1 KV | | | |
| | Isolation Protection | 2.5 KV | | | |
| Digital Input/Output | No. of Channels | 2 input and output | 4 input and output | – | – |
| | Input/Output range | 0-30V opto-isolated | | – | – |
| | Max. frequency | 1KHz | | – | – |
| | Digital input interrupt | Falling and rising edge, normal and invert | | – | – |

Cameras



| Model Name | QCAM-GM0640-300CE | QCAM-GM1300-060DE | QCAM-GC1300-060CE | QCAM-GM1600-060DE | QCAM-GM2500-014DE | QCAM-GC2500-014CE | QCAM-GM3800-010CE | QCAM-GC4600-007CE |
|---------------------------|-------------------|--------------------|--------------------|--------------------|----------------------|----------------------|----------------------|----------------------|
| Resolution | 640 x 480 | 1280 x 1024 | 1280 x 1024 | 1600 x 1200 | 2592 x 1944 | 2592 x 1944 | 3856 x 2764 | 3072 x 2048 |
| Frame Rate | 300 | 60 | 60 | 60 | 14 | 14 | 10 | 7 |
| Sensor | Python 300, CMOS | e2V EV76C560, CMOS | e2V EV76C560, CMOS | e2V EV76C570, CMOS | Aptina MT9P031, CMOS | Aptina MT9P031, CMOS | Aptina MT9J003, CMOS | Aptina MT9F002, CMOS |
| Shutter | Global Shutter | Global Shutter | Global Shutter | Global Shutter | Rolling Shutter | Rolling Shutter | Rolling Shutter | Rolling Shutter |
| Sensor Size | 1/4" | 1/1.8" | 1/1.8" | 1/1.8" | 1/2.5" | 1/2.5" | 1/2.3" | 1/2.3" |
| Pixel Size (µm) | 4.8 x 4.8 | 5.3 x 5.3 | 5.3 x 5.3 | 4.5 x 4.5 | 2.2 x 2.2 | 2.2 x 2.2 | 1.67 x 1.67 | 1.4 x 1.4 |
| Color Format | Mono | Mono | Color | Mono | Mono | Color | Mono | Color |
| Interface | Gigabit Ethernet | | | | | | | |
| Dimensions (L x W x H) mm | 42 x 42 x 29 | | | | | | | |
| Lens Mount | C/CS | | | | | | | |
| Operating Temperature | 0 ~ 50°C | | | | | | | |
| Power Consumption | <2.6 W | <2.6 W | <2.6 W | <2.7 W | <2.7 W | <2.7 W | <3.7 W | <3.7 W |

Energy Solution Overview

Introduction

The successful management of power and energy applications is becoming increasingly critical as new energy sources, distributed across a much wider area than fossil fuels, become increasingly important. The informatization, intellectualization, and energy development of these new energy sources will change the traditional model, from a single communication model without response, to an alarm-to-intercommunication unified model. Advantech, as a leading manufacturer of industrial PCs for power and energy applications, provides intelligent components, from smart meters, IEC-61850-3 certified industrial computers, intelligent wireless gateways, to SCADA software, substation automation system development, and energy management. Through a host of innovative products and solutions, Advantech has shown itself to be one of the key enablers of Industrial IoT and Industry 4.0.

Integrated Power Management

▪ SCADA Application

In Smart Substations, it's essential to be able to remotely monitor substation devices from a central management center. To achieve this, high performance computing platforms integrate HMI/DATA collection, data monitoring, environmental status, which help operators accurately evaluate their devices' status and take action.

- Application Requirements
 - Reliable IEC 61850-3 certification
 - High-performance computing platform
 - AMT/ TPM

▪ Cyber Security for Smart Grids

There are different grades of network protection priorities in a substation, and use in these environments needs reliable cyber security. This requires a software firewall or comparable hardware firewall devices to prevent illegal and unauthorized user access.

- Application Requirements
 - Reliable IEC 61850-3 certification
 - High-performance Ethernet
 - Virtual Machine/ TPM

▪ Communication & Data Gateway with IEC 61850

Within a substation, various devices use a wide variety of protocols, such as IEC-60870-101/103/104, Modbus or other private rules. The status and information of these devices needs to be accurately monitored and collected through a gateway computer with a unified communication transition protocol. It's very important that transfer devices use various protocols to unify the IEC-61850 protocol.

- Application Requirements
 - Reliable IEC 61850-3 certification
 - Multiple communication interfaces support
 - Isolated serial ports, Ethernet ports, IRIG-B

▪ Auxiliary Safety Monitoring


Along with modern computing and network communication technology, electricity system automation becomes more important, especially for safety related applications. The goal is to avoid issues of traditional substation such as non-precaution and non-linkage conditions. Advantech's computers and devices provide safety related information acquisition and monitoring, such as environmental parameters, facility parameters, and access guard status and other unusual conditions.

- Application Requirements
 - On-board or expansion IO for data acquisition
 - Communication protocol support for monitoring sensors

▪ Primary Device Monitoring

In smart substations, traditional primary devices including transformers, GIS, CT/VT, Thunder and other isolated switches, normally operate without precaution, monitoring unified communication protocols. Along with the development of modern smart substations, the IEC-61850 standard is latest trend in substation applications and primary device monitoring. To meet these requirements, Advantech provides IEC-61850 compliant computer platforms for data communication and transmission which keeps primary devices operating normally.

- Application Requirements
 - Flexible I/O, communication interfaces and protocol support
 - Highly reliable computing platform

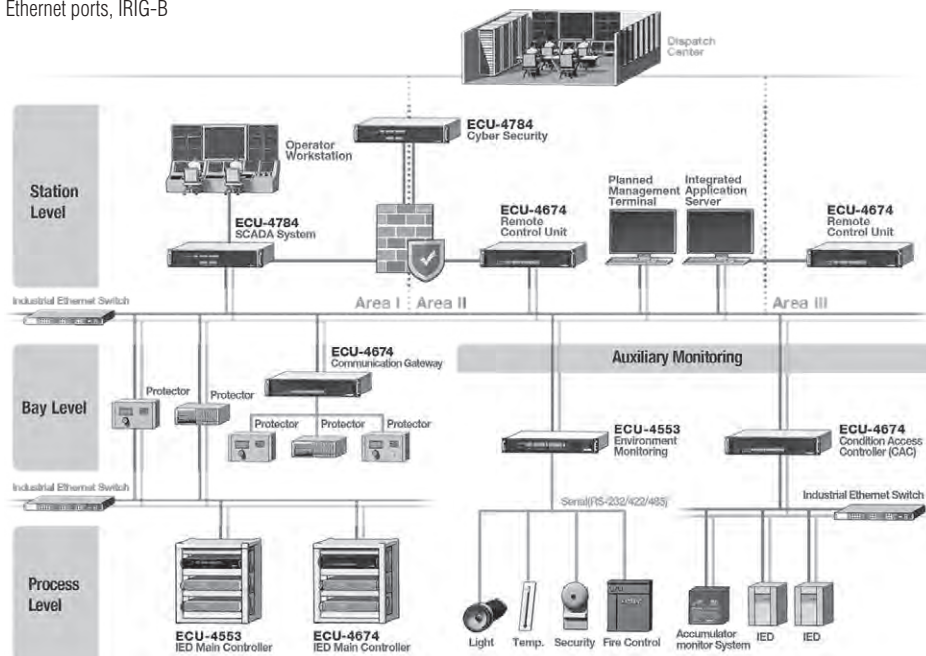

Distributed Energy Monitoring in Renewable Energy

With the increasing construction of solar power plants, customers are finding it difficult to handle issues of the number of communication protocol requests, unstable communication networks on distributed farms and no high-efficiency or intelligent monitoring software. This means traditional solar power monitoring solutions can not satisfy modern fast developing solar operation requirements.

Advantech provides high-performance computing platforms, total data acquisition modules, communication protocol gateways, network communications, and cloud software solutions with multiple communication protocols and stable Ethernet or wireless network support, network switchboards and remote monitoring software.

▪ Data Acquisition Using Multiple Communication Protocols

There are many types of electrical equipment in solar power farms, such as inverters, combiner boxes, and intelligent or non-intelligent power meters, which need the support of a diverse range of communication protocols. For device data acquisition Advantech provides communication platforms compatible with these protocols.

- Application Requirements
 - X86/ RISC-based gateway platforms
 - Multiple serial ports / network ports
 - IEC-60870 / Modbus / DNP3 protocol support

▪ Wireless Communication on Distributed Solar Power

Distributed solar power farms are scattered over vast and remote areas, and establishing stable communication networks is not easy. To reduce wiring costs and maintain reliability, Advantech provides gateways capable of supporting 2G/3G/Wi-Fi/4G wireless for stable networks with data integrity.

- Application Requirements
 - 2G/3G/Wi-Fi/4G wireless
 - Reliable platform with integrated intelligent software

▪ Remote Monitoring and Maintenance

The operating status of solar power plants (especially solar panels) directly affects power generation efficiency and capacity. Comprehensive centralized monitoring and scientific management is important. Due to the characteristics of wide areas and long distances, Advantech provides remote control solutions for helping administrators immediately understand the operational status of the plant through handheld devices or PCs. This helps with the timely control and maintenance of equipment while enhancing the efficiency and safety of solar power plants.

Distributed Energy Monitoring in Energy Consumption

In order to reduce production costs and increase product profitability, manufacturing factories require integrated monitoring management and optimization measures to manage their high energy-consuming facilities. Advantech not only provides practical and easy-to-implement energy management solutions, but also has a full range of product portfolios, including smart meters, data acquisition modules, and control hosts, as well as as and back-end management platforms to offer complete solutions for enterprises to achieve energy efficiency.

High Energy-consuming Equipment Monitoring Application

Since harmonics can have a significant impact on electrical distribution systems and the critical facilities they need, Advantech's energy management solution used equipment failure diagnosis and prevention mechanisms to provide analytical information through monitoring harmonic currents generated by non-linear electronic loads, so as to improve production efficiency and reduce maintenance and energy costs.

Factory Facility Monitoring Application

By providing real-time energy consumption data to accurately grasp the key moments, Advantech's factory facility monitoring systems are aimed at controlling high consumption facilities such as lighting, HVAC (heating, ventilation and air conditioning), and UPS (uninterruptible power supply). A time-of-use pricing service was used to adjust the use and operation of the facility according to the actual power usage and electricity tariff, saving energy costs.

WebAccess Based Remote Energy Management Solution

For factory energy consumption, Advantech WebAccess SCADA software is able to implement remote management, energy consumption status overview, energy saving potential assessment, and recommend practical measures, energy monitoring and reporting analysis, etc. to effectively achieve energy savings and cost control.



X86-based Industrial Automation Computers Selection Guide

Energy Solution Platforms

NEW

NEW



| Model Name | ECU-4685 | UNO-4671A | ECU-4674 | ECU-4574 | ECU-4784 Xeon | UNO-4673A/4683 | ECU-4784 |
|---------------------------|--|--|--|--|--|--|--|
| Certification | IEC 61850-3/IEEE 1613 China Electricity Certificate IV level | IEC 61850-3 / IEE 1613 Compliant China Electricity Certificate IV level | IEC 61850-3 / IEE 1613 Compliant China Electricity Certificate IV level | IEC 61850-3/IEEE 1613 China Electricity Certificate IV level | IEC 61850-3/IEEE 1613 China Electricity Certificate IV level | IEC 61850-3/IEEE 1613 Compliant China Electricity Certificate IV level | IEC 61850-3/IEEE 1613 China Electricity Certificate IV level |
| CPU | Intel Skylake Celeron 3955U 2.0GHz | Intel Atom D525 1.8GHz | Intel Atom N2600 1.66GHz | Intel Atom N2600 1.66GHz | Intel SkyLake Xeon E3-1505L Quad-core 2.0GHz | Intel Atom D510, 1.6 GHz Intel Core i7, 2.0 GHz | Intel Haswell Core i7 4650U 1.7GHz dual-core, i3 4010U 1.7GHz, Celeron 2980U 1.6GHz |
| RAM | 4G DDR3L SDRAM | 4GB DDR3 SDRAM | 2G DDR3 SDRAM | 2G DDR3 SDRAM | 16G DDR4 SDRAM with ECC | 2GB DDR2 SDRAM 4GB DDR3 SDRAM | 8G DDR3L SDRAM 16G DDR3L SDRAM |
| Display | VGA | VGA | VGA | VGA | VGA/DVI | VGA/DVI-I | VGA/DVI |
| Serial Ports | 8 x Isolated RS-232/422/485 (Terminal Block) | 2 x Isolated RS-232, 4 x Isolated RS-422/485, 4 x Isolated RS-485 | 2 x isolated RS-232 1 x IRIG-B 16 x Isolated RS-232/485 | 2 x isolated RS-232 8 x isolated RS-232/485 | 2 x Isolated RS-232 (Standard) 8 x RS-232/422/485 (Terminal Block) | 2 x Isolated RS-232/422/485 | 2 x Isolated RS-232 (Standard) 8 x RS-232/422/485 (Terminal Block) |
| Ethernet Ports | 6 x 10/100/1000Base-T | 2 x 10/100/1000Base-T and 4 x 10/100 Base-T RJ-45 | 2 x 10/100/1000Base-T 6 x 10/100Base-T | 2 x 10/100/1000Base-T 6 x 10/100Base-T | 8 x 10/100/1000Base-T | 2 x 10/100/1000, 4 x 10/100 Base-T RJ-45 | 8 x 10/100/1000Base-T |
| USB Ports | Six (One internal) | 4 (1 x internal) | 5 (1 x internal) | 5 (1 x internal) | 6 (1 x internal) | 6 (1 x internal) | 6 (1 x internal) |
| Expansion | - | PCI-104 | 1 x PCI 104 | 1 x PCI 104 | 2 x PCI/PCIE | - | 2 x PCI/PCIE |
| Onboard I/O | - | - | 8 x isolated DI, 8 x isolated DO | - | - | - | - |
| Watchdog Timer | ✓ | ✓ | ✓ | ✓ | - | ✓ | ✓ |
| CompactFlash Slots | One Internal (mSATA) | One Internal | 1 x Internal (CF) | 1 x Internal (CF) | 1 x Internal (CFast) | One Internal | 1 x Internal (CFast) |
| 2.5" HDD Expansion | 2 x SATA | 1 x SATA | 2 x SATA | 2 x SATA | 2 x SATA | 1 x SATA | 2 x SATA |
| Operating Systems | WES7, Windows7, Windows 8, Windows Server 2012R2, Windows Server 2008R2(64bits), Windows Embedded 8 64-bit | WES2009, WES7, Windows CE 6.0 and Linux | WES7, Windows7, Linux | WES7, Windows7, Linux | WES7, Windows7, Windows 8, Windows Server 2012R2, Windows Server 2008R2(64bits), Windows Embedded 8 (64bits) | WES7, Windows XP Embedded, Windows /XP, Windows CE 6.0, Linux, QNX, Win10, Win7, Windows Server 2008R2/ 2012/ 2012R2 | WES7, Windows7, Windows 8, Windows Server 2012R2, Windows Server 2008R2(64bits), Windows Embedded 8 (64bits) |
| Mounting | 1U Rack-Mount | 2U Rackmount | 2U Rackmount | 1U Rackmount | - | 2U Rackmount | 2U Rackmount |
| Anti-Vibration | 2 G w/mSATA, 1 G w/HDD | 2 G w/CF, 0.5 G w/HDD | 2 G w/CF, 1 G w/HDD | 2 G w/CF, 1 G w/HDD | - | 2 G w/CF, 1 G w/HDD | 2 Gw/CF, 1 Gw/HDD |
| Anti-Shock | 30 G w/mSATA, 20 G w/HDD | 30 G w/CF, 20 G w/HDD | 30 G w/CF, 20 G w/HDD | 30 G w/CF, 20 G w/HDD | - | 30 G w/CF, 20 G w/HDD | 30 G w/CF, 20 G w/HDD |
| Operating Temperature | -20 ~ 70°C (-4 ~ 158°F) | -20 ~ 60°C (-4 ~ 140°F) | -20 ~ 70°C (-4 ~ 158°F) | -20 ~ 70°C (-4 ~ 158°F) | -20 ~ 60°C with 50% CPU/ I/O loading, without 2D/3D -20 ~ 45°C with 100% CPU/ I/O loading | -20 ~ 70°C (-4 ~ 158°F) | -20 ~ 70°C (-4 ~ 158°F) |
| Power Consumption Typical | 22W | 30 W | 24 W | 24 W | 35 W | 45 W | 22W (i7 dual-core) 24.2W (Celeron) |
| Power Requirements | Supports Redundant Power Input Power 1: 100 ~ 240 V _{AC} or 100 ~ 240 V _{DC} Power 2: 100 ~ 240 V _{AC} or 100 ~ 240 V _{DC} | Supports Redundant power input Power 1: 100 ~ 240 V _{AC} or 100 ~ 240 V _{DC} Power 2: 100 ~ 240 V _{AC} or 100 ~ 240 V _{DC} | Supports Redundant power input Power 1: 100 ~ 240 V _{AC} or 100 ~ 240 V _{DC} Power 2: 100 ~ 240 V _{AC} or 100 ~ 240 V _{DC} | Supports Redundant power input Power 1: 100 ~ 240 V _{AC} or 100 ~ 240 V _{DC} Power 2: 100 ~ 240 V _{AC} or 100 ~ 240 V _{DC} | Supports Redundant power input Power 1: 100 ~ 240 V _{AC} or 100 ~ 240 V _{DC} Power 2: 100 ~ 240 V _{AC} or 100 ~ 240 V _{DC} | Supports Redundant power input Power 1: 100 ~ 240 V _{AC} or 100 ~ 240 V _{DC} Power 2: 100 ~ 240 V _{AC} or 100 ~ 240 V _{DC} | Supports Redundant Power Input Power 1: 100 ~ 240 V _{AC} or 100 ~ 240 V _{DC} Power 2: 100 ~ 240 V _{AC} or 100 ~ 240 V _{DC} |
| Dimensions (W x D x H) | 440 x 280 x 44 mm | 440 x 220 x 88 mm (17.3" x 8.6" x 3.4") | 440 x 220 x 88 mm (17.3" x 8.6" x 3.4") | 440 x 272 x 44 mm (17.3" x 8.6" x 3.4") | 440 x 280 x 88 mm | 440 x 220 x 88 mm (17.3" x 8.6" x 3.4") | 440 x 280 x 88 mm |
| Weight | 5.5 kg | ~ 5.5 kg | ~ 6.0 kg | 4.6 kg | - | ~ 6.0 kg | ~ 6.0 kg |
| Ordering Information | ECU-4685-LC24SAE | - | ECU-4674-A53SAE ECU-4674-LBA53SAE | ECU-4574-A53SAE | ECU-4784-E56SAE | - | ECU-4784-D55SAE ECU-4784-D56SBE ECU-4784-E15SAE ECU-4784-C25SAE |

RISC-based Industrial Communication Gateway



| Module Name | ECU-1251 | ECU-1152 | ECU-4553 |
|---------------------------|--|--|--|
| Certification | China Electricity Certificate IV level | China Electricity Certificate IV level | CE/FCC/CCC |
| CPU | TI Cortex A8 800MHz | TI Cortex A8 800MHz | TI Cortex A8 800MHz |
| RAM | DDR3L 256MB | DDR3L 512MB | DDR3L 1GB |
| Serial Ports | 4 x Isolated RS-232/485 | 6 x isolated RS-232/485 | 16 x isolation RS-232/485 |
| Ethernet Ports | 2 x 10/100 Base-T | 2 x 10/100 Base-T | 4 x 10/100 Base-T |
| CAN | - | - | 2 x CAN 2.0B |
| Display | - | - | VGA |
| USB Ports | 1 | 1 | 1 |
| Storage | 2 x SD (Micro-SD) | 2 x SD (Micro-SD) | 2 x SD (Micro-SD) |
| Watch Timer | ✓ | ✓ | ✓ |
| Power Requirements | 10 ~ 30 V _{DC} | 10 ~ 30 V _{DC} | 100 ~ 240 V _{AC} or 100 ~ 240 V _{DC} |
| Operating System | RT-Linux 3.12 | RT-Linux 3.12 | RT-Linux 3.12 |
| Mounting | Wall-mount/ DIN-rail | Wall-mount/ DIN-rail | 1U Rack-mount |
| Anti-vibration | 2G w/Micro-SD | 2G w/Micro-SD | 2G w/Micro-SD |
| Anti-shock | 10G w/Micro-SD | 10G w/Micro-SD | 10G w/Micro-SD |
| Operating Temperature | -40 ~ 70°C | -40 ~ 70°C | -40 ~ 70°C |
| Typical Power Consumption | 2.4W | 2.4W | 6.6W |
| Dimensions | 140 x 96.5 x 30 mm | 170 x 110 x 32.2 mm | 440 x 220 x 44 mm |
| Weight | 1.5 kg | 1.5 kg | 4.5 kg |

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O Modules

8

Industrial I/O and Video Solutions

Intelligent Transportation Platforms

Comprehensive Solutions for Modernizing Infrastructure

Advantech collaborates with partners to provide reliable platform solutions that facilitate intelligent transportation in cities worldwide. Leveraging over a decade of experience, Advantech has invested resources into designing and developing innovative product offerings aimed specifically at the transportation industry. These products include automatic fare collection systems, wayside control equipment, rolling stock management solutions, and traffic surveillance systems. By enabling intelligent transportation systems, Advantech achieves its vision of realizing smart city technologies.



Product Offerings

AFC Controller

ITA-1000 Series

AFC controller series features fanless design and rich I/O to support various applications such as automatic gate machines, ticket vending machines, automatic fare collection systems, and more. It also supports self-service equipment and kiosk applications due to its compact and lightweight design.



Display System

ARS-P3800/2800

Advantech ARS-P series is fanless Passenger Information System, EN 50155 certified specially for rolling stock applications. It features a stretched LCD panel, with high brightness to ensure easy readability even in light-insufficient environments. It serves as a reliable platform to provide passenger information on a wide range of vehicles.



Rugged-design Platform

ITA-2000 Series

Wayside controller series provide various applications such as communication-based train control, wayside signaling, and train control system. Our wayside controller system includes CTC and ATC systems that provide a secure monitoring and operating environment.



Panel Controller

ITA-7000 / 8000 Series

ITA-7000 series is a fanless Passenger Information System, EN 50155 certified specially for rolling stock applications. Its stretched LCD panel ensures easy readability even in light-insufficient environments. ITA-8000 series is a fanless touch panel PC for human machine interface. The panel's small, ultra-flat design offers space savings for installation in driver cabins, while the configuration flexibly allows it to be adjusted for specific applications and different train models.



Rolling Stock Controller

ITA-5000 Series

Rolling stock controller caters for rolling stock applications including driver machine interface, passenger information system, vehicle monitoring system and more. Advantech in-train products are EN 50155 and EN50121-3-2 railway standard certified, which enable them to withstand high levels of vibration to enhance their longevity.



Intelligent Transportation Platforms



| Model Name | | ITA-1501 | ITA-1611 | ITA-1711 | ITA-2111 |
|--------------------------|------------------------|--|---|---|---|
| Processor System | CPU | i.MX6 Quad Cortex-A9 | Intel® Celeron™ J1900 | Intel® Celeron™ J1900 | Intel® Atom™ E3845 |
| | CPU TDP | 5W | 10W | 10W | 10W |
| | Frequency | 1.0 GHz | 2.0 GHz | 2.0 GHz | 1.91 GHz |
| | Core Number | 4 | 4 | 4 | 4 |
| | L2 Cache | 1MB | 2MB | 2MB | 2MB |
| | BIOS | - | AMI SPI 64Mbit | AMI SPI 64Mbit | AMI SPI 64Mbit |
| | Chipset | - | - | - | - |
| Memory | Technology | Single channel DDR3 1066 | Dual channel DDR3 1333 | Dual channel DDR3 1333 | Dual channel DDR3 1333 |
| | Capacity | Up to 2GB | Up to 8GB | Up to 8GB | Up to 8GB |
| | Onboard Memory | 2GB | 4GB | 4GB | 4GB |
| | DIMM Slot | - | 1 | 1 | 1 |
| Display | Graphic Memory | Freescall i.MX6 integrated Hardware accelerators | Shared with system memory up to 256MB | Shared with system memory up to 256MB | Shared with system memory up to 256MB |
| | Multiple Display | Dual | Dual | Dual | Dual |
| | Display Interface | VGA +HDMI or 2 x VGA Single channel: 1920 x 1080 @ 60 Hz Dual channel: 1920 x 1080 @ 60 Hz | 2 x VGA or VGA + DVI-D or VGA + LVDS Single channel max: 1920 x 1080 @ 60Hz Dual channel max: 1920 x 1080 @ 60Hz | 2 x VGA or VGA + DVI-D or VGA + LVDS Single channel max: 1920 x 1080 @ 60Hz Dual channel max: 1920 x 1080 @ 60Hz | VGA + DVI-D Single channel max: 1920 x 1080 @ 60Hz Dual channel max: 1920 x 1080 @ 60Hz |
| Ethernet | Controller | 1 x RTL8211E | 2 x Intel® I211 | 2 x Intel® I211 | 4 x Intel® I210-IT |
| | Speed | 10/100/1000 Mbps | 10/100/1000 Mbps | 10/100/1000 Mbps | 10/100/1000 Mbps |
| | Connector | 1 x RJ45 | 2 x RJ45 | 2 x RJ45 | 4 x RJ45 |
| Storage | Onboard Slot | 1 x SD | 1 x mSATA | 1 x mSATA | 1 x mSATA |
| | HDD/SSD | 1 x 2.5" SSD | 1 x 2.5" HDD/SSD | 1 x 2.5" HDD/SSD | 1 x 3.5" or 2 x 2.5" HDD/SSD |
| | Easy Swap Module | - | - | 1 | - |
| Expansion Interface | Mini PCIe | 1 | 1 | 1 | 1 |
| | PCIe | - | - | - | - |
| | PCI | - | - | - | - |
| | PCI104 | - | - | - | 1 |
| | ITA-EM | - | - | - | - |
| I/O | Display | VGA +HDMI or 2 x VGA | 2 x VGA or VGA + DVI-D or VGA + LVDS | 2 x VGA or VGA + DVI-D or VGA + LVDS | VGA + DVI-D |
| | Audio | 1 x Speaker-out with 2 x 4W amplifier, 1 x Mic-in | 1 x Speaker-out with 2 x 4W amplifier, 1 x Mic-in | 1 x Speaker-out with 2 x 4W amplifier, 1 x Mic-in | 1 x Speaker-out with 2 x 4W amplifier, 1 x Mic-in |
| | Ethernet | 1 | 2 | 2 | 4 |
| | USB3.0 | - | 1 | 1 | 1 |
| | USB2.0 | 6 | 5 | 5 | 6 |
| | COM | Up to 6 ports | Up to 6 ports | Up to 14 ports | 10 |
| | Digital I/O | - | 8 GPIO | Up to 24 DI and 24 DO | - |
| Power | Input Range | DC 12V | DC 9V~36V | DC 9V~36V | AC 100V~240V or DC 110V |
| Physical Characteristics | Dimensions (W x H x D) | 188 x 66 x 129 mm (7.28" x 2.59" x 5.11") | 200 x 70 x 190 mm (7.87" x 2.75" x 7.48") | 200 x 100 x 190 mm (7.87" x 3.93" x 7.48") | 427 x 44 x 325 mm (19.0" x 1.73" x 12.79") |
| Environment | Operating Temperature | 0 ~ 60 °C (With SSD) | -25 ~ 60 °C (With SSD) 0 ~ 40 °C (With HDD) | -25 ~ 60 °C (With SSD) 0 ~ 40 °C (With HDD) | -25 ~ 60 °C (With SSD) 0 ~ 40 °C (With HDD) |
| Certification | EMC | CE, FCC, CCC | CE, FCC, CCC | CE, FCC, CCC | CE, FCC, CCC |
| | Safety Certifications | UL, CB, CCC | UL, CB, CCC, BSMI | UL, CB, CCC, BSMI | UL, CB, CCC |
| | Other | - | - | - | EN 50121-4 |

1
Software and Industry
Solutions

2
Industrial Server

3
Intelligent System

4
Intelligent HMI and
Monitors

5
Automation Computers
and Controllers

6
Industrial
Communication

7
Remote I/O Modules

8
Industrial I/O and
Video Solutions

Intelligent Transportation Platforms



| Model Name | | ITA-2211 | ITA-2231 | ITA-5231 | ITA-5612 | ITA-5831 |
|--------------------------|------------------------|---|---|---|--|--|
| Processor System | CPU | Intel® Atom™ E3845 | Intel® Core™ i7-6822EQ | Intel® 6th Gen. Core™ i7/i5/i3 | Intel® Atom™ X7-E3950 | Intel® 6th Gen. Core™ i7/i5/i3 |
| | CPU TDP | 10W | 25W | 25W | 12W | 25W |
| | Frequency | 1.91 GHz | 2.0 GHz | Up to 2.0 GHz | Up to 2.0 GHz | Up to 2.0 GHz |
| | Core Number | 4 | 4 | 4/2 | 4 | 4/2 |
| | L2 Cache | 2MB | 8MB | 8/6/3MB | 2MB | 8/6/3MB |
| | BIOS | AMI SPI 64Mbit | AMI SPI 128Mbit | AMI SPI 128Mbit | AMI SPI 128Mbit | AMI SPI 128Mbit |
| | Chipset | - | Intel® QM170 | Intel® QM170 | - | Intel® QM170 |
| Memory | Technology | Dual channel DDR3 1333 | Dual channel DDR4 2133 | Dual channel DDR4 2133 | Dual channel DDR3L 1600 | Dual channel DDR4 2133 |
| | Capacity | Up to 8GB | Up to 32GB | Up to 16GB | Up to 8GB | Up to 16GB |
| | Onboard Memory | 4GB | 16GB | 8GB | 4GB | 8GB |
| | DIMM Slot | 1 | 1 | 1 | 1 | 1 |
| Display | Graphic Memory | Shared with system memory up to 256MB | Shared with system memory up to 512MB | Shared with system memory up to 512MB | Shared with system memory up to 256MB | Shared with system memory up to 512MB |
| | Multiple Display | Dual | Dual | Dual | Dual | Dual |
| | Display Interface | VGA + DVI-D Single channel max: 1920 x 1080 @ 60Hz Dual channel max: 1920 x 1080 @ 60Hz | DVI-I + DVI-D Single channel max: 1920 x 1200 @ 60Hz Dual channel max: 1920 x 1200 @ 60Hz | DVI-I + DVI-D Single channel max: 1920 x 1200 @ 60Hz Dual channel max: 1920 x 1200 @ 60Hz | DVI-I + DVI-D (Optional) Single channel max: 1920 x 1200 @ 60Hz Dual channel max: 1920 x 1200 @ 60Hz | DVI-I + DVI-D (Optional) Single channel max: 1920 x 1200 @ 60Hz Dual channel max: 1920 x 1200 @ 60Hz |
| Ethernet | Controller | 2 x Intel® i210-IT | 1 x Intel® i219LM and 1 x Intel® i210-IT | 1 x Intel® i219LM and 2 x Intel® i210-IT | 3 x Intel® i210-IT | 3 x Intel® i210-IT |
| | Speed | 10/100/1000 Mbps | 10/100/1000 Mbps | 10/100/1000 Mbps | 10/100/1000 Mbps | 10/100/1000 Mbps |
| | Connector | 2 x RJ45 | 2 x RJ45 | 3 x M12 X-coded(F) | 3 x M12 X-coded(F) | 3 x M12 X-coded(F) |
| Storage | Onboard Slot | 1 x mSATA | 1 x M.2 (with SATA interface) | 1 x mSATA | 1 x mSATA | 1 x mSATA |
| | HDD/SSD | 1 x 3.5" or 2 x 2.5" HDD/SSD | 2 x 3.5" or 3 x 2.5" HDD/SSD | - | - | - |
| | Easy Swap Module | - | - | Max to 4 x 2.5" SSD or 3 x 2.5" HDD | 2 x 2.5" SSD | Max to 3 x 2.5" SSD or 2 x 2.5" HDD |
| Expansion Interface | Mini PCIe | 1 | 1 | 3 | 1 (Shared Slot with mSATA) | 3 |
| | PCIe | - | - | - | - | - |
| | PCI | - | - | - | - | - |
| | PCI104 | 1 | 1 | - | - | - |
| | ITA-EM | 3 | 3 | 4 | - | 2 |
| I/O | Display | VGA + DVI-D | DVI-I + DVI-D | DVI-I + DVI-D | 1 x DVI-I | 1 x DVI-I |
| | Audio | 1 x Speaker-out with 2 x 4W amplifier, 1 x Mic-in | 1 x Speaker-out with 2 x 4W amplifier, 1 x Mic-in | 1 x Speaker-out with 2 x 4W amplifier, 1 x Mic-in | 1 x Speaker-out with 2 x 4W amplifier, 1 x Mic-in | 1 x Speaker-out with 2 x 4W amplifier, 1 x Mic-in |
| | Ethernet | 2 | 2 | 3 | 3 | 3 |
| | USB3.0 | 1 | 4 | 2 | 2 | 2 |
| | USB2.0 | 6 | 3 | 1 x USB2.0 with M12 A-coded(F) 4-pin | - | 1 x USB2.0 with M12 A-coded(F) 4-pin |
| | COM | 2 | 2 | 2 | 1 | 2 |
| | Digital I/O | - | - | 4 DI and 4 DO | 8 GPIO | 4 DI and 4 DO |
| Power | Input Range | AC 100V~240V or DC 110V | AC 100V~240V or DC 110V | Optional DC 24/48/72/110V input compliant with EN50155 class S2/C2 | Optional DC 24/48/72/110V input compliant with EN50155 class S2/C1 | Optional DC 24/48/72/110V input compliant with EN50155 class S2/C1 |
| Physical Characteristics | Dimensions (W x H x D) | 483 x 88 x 325 mm (19.0" x 3.46" x 12.79") | 483 x 88 x 325 mm (19.0" x 3.46" x 12.79") | 427 x 88 x 200 mm (19.0" x 3.46" x 7.87") | 205 x 88 x 210 mm (8.07" x 2.83" x 8.26") | 220 x 88 x 200 mm (8.66" x 3.46" x 7.87") |
| Environment | Operating Temperature | -25 ~ 60 °C (With SSD) 0 ~ 40 °C (With HDD) | -25 ~ 60 °C (With SSD) 0 ~ 40 °C (With HDD) | EN 50155 TX -40 ~ 70 °C (With SSD) | EN 50155 TX -40 ~ 70 °C (With SSD) | EN 50155 TX -40 ~ 70 °C (With SSD) |
| Certification | EMC | CE, FCC, CCC | CE, FCC, CCC | CE, FCC, CCC | CE, FCC, CCC | CE, FCC, CCC |
| | Safety Certifications | UL, CB, CCC | UL, CB, CCC, BSMI | UL, CB, CCC, BSMI | UL, CB, CCC, BSMI | UL, CB, CCC, BSMI |
| | Other | EN 50121-4 | EN 50121-4 | EN 50155, EN 50121-3-2, EN 50121-4, EN 45545 | EN 50155, EN 50121-3-2, EN 45545 | EN 50155, EN 50121-3-2, EN 50121-4, EN 45545 |



| Model Name | | ARS-P3800 | ARS-P2800/P2800D | ITA-7220/7220D |
|--------------------------|------------------------|--|--|---|
| Computer System | CPU | AMD® Embedded G-Series GX-217GA dual-core (1.65 GHz) SoC | Intel® Celeron® J1900 quad-core (2.00 GHz) | Intel® Celeron® J1900 quad-core (2.00 GHz) |
| | Memory | DDR3 1600MHz 204-pin SODIMM (up to 8GB) | DDR3 1600MHz 204-pin SODIMM (up to 8GB) | DDR3L 1333MHz 204-pin SODIMM (up to 8GB) |
| Storage | mSATA | 1 x mSATA SSD (64 GB default) | 1 x mSATA SSD (64 GB default) | 1 x mSATA SSD (64 GB default) |
| Graphics | Chipset | Radeon™ HD8280E, max. 450 MHz | Intel® HD Graphics, max. 688 MHz | Intel® HD Graphics, max. 688 MHz |
| Display | Display Type | 38" TFT LCD panel, max. resolution 1920 x 540 | 28" TFT LCD panel, max. resolution 1920 x 357 | 22" TFT LCD panel, max. resolution 1920 x 1080 |
| | Brightness | 800 nits | 1000 nits | 400 nits |
| | Contrast Ratio | 5000:1 | 6500:1 | 1000:1 |
| Ethernet | LAN | 10/100/1000 Mbps (M12 A-coded) | 10/100/1000 Mbps (M12 A-coded) | 10/100/1000 Base-T Ethernet interface (M12 X-coded) |
| Touch Panel | Touch Type | - | - | - |
| | Function Keys | - | - | - |
| I/O | USB | 1 x USB 2.0 (M12 A-coded), 1 x USB 2.0 (Type A) | 1 x USB 2.0 (M12 A-coded), 1 x USB 2.0 (Type A) | 1 x USB 2.0 (M12 A-coded) |
| | Video Output | 1 x HDMI | 1 x DVI-D | 1 x DVI-D |
| Digital I/O | Input/Output | - | - | - |
| Software | Operating System | Linux Ubuntu 16.04 | Linux Ubuntu 16.04 | Linux Ubuntu 16.04 |
| Power | Input Voltage | 110 V _{DC} (±40%, selectable), 4-pole M12 connector | 24/48/72/110 V _{DC} (±40%), 4-pole M12 connector | 24/48/72/110 V _{DC} (±40%), 4-pole M12 connector |
| Environment | Operating Temperature | EN 50155 T1: -25 ~ +55 °C | EN 50155 T1: -25 ~ +55 °C | EN 50155 T1: -25 ~ +55 °C |
| | Vibration, Shock | EN 50155 | EN 50155 | EN 50155 |
| | Ingress Protection | IP-54 | IP-54 | IP-40 |
| Physical Characteristics | Dimensions (W x H x D) | 1065 x 342 x 63 mm (42.0 x 13.5 x 2.5 in) | 814 x 178 x 56 mm (32.0 x 7.0 x 2.2 in) | 575 x 299 x 56 mm (23 x 12 x 2.2 in) |
| | Weight | 11 kg (24.3 lb) | 8.3 kg (18.3 lb) | 7 kg (15.4 lb) / 6.5 kg (14.3 lb) |
| Certifications | Railway Related | EN 50155, EN 50121, IEC 61373, (EN 45545 compliant) | EN 50155, EN 50121, IEC 61373, IEC 60571, (EN 45545 compliant) | EN 50155, EN 50121, IEC 61373, IEC60571 (EN 45545) |
| | EMC, Safty | CE/FCC Class A, UL | CE/FCC Class A, UL | CE/FCC Class A, UL |

1
Software and Industry Solutions

2
Industrial Server

3
Intelligent System

4
Intelligent HMI and Monitors

5
Automation Computers and Controllers

6
Industrial Communication

7
Remote I/O Modules

8
Industrial I/O and Video Solutions

Intelligent Transportation Platforms



| Model Name | | ITA-7170 | ITA-8120 | ITA-8101 |
|--------------------------|------------------------|---|--|--|
| Computer System | CPU | Intel® Celeron® J1900 quad-core (2.00 GHz) | Intel® Atom™ x7-E3950 quad-core (2.00 GHz) | Intel® Atom™ x7-E3950 quad-core (2.00 GHz) |
| | Memory | DDR3L 1333MHz 204-pin SODIMM (up to 8GB) | DDR3L 1600MHz 204-pin SODIMM (up to 8GB) | DDR3L 1600MHz 204-pin SODIMM (up to 8GB) |
| Storage | mSATA | 1 x mSATA SSD (64 GB default) | 1 x M.2 2242 SSD (64 GB default) | 1 x M.2 2242 SSD (64 GB default) |
| Graphics | Chipset | Intel® HD Graphics, max. 688 MHz | Intel® HD Graphics, max. 650 MHz | Intel® HD Graphics, max. 650 MHz |
| Display | Display Type | 17" TFT LCD panel max. resolution 1920 x 1080 | 12.1" TFT LCD panel, max. resolution 1024 x 768 | 10.4" TFT LCD panel, max. resolution 1024 x 768 |
| | Brightness | 400 nits | 500 nits | 400 nits |
| | Contrast Ratio | 600:01:00 | 700:1 | 500:1 |
| Ethernet | LAN | 10/100/1000 Base-T Ethernet interface (M12 X-coded) | 10/100/1000 Mbps (M12 X-coded) | 10/100/1000 Mbps (M12 X-coded) |
| Touch Panel | Touch Type | - | Projected capacitive touchscreen with support for two-finger multi-touch control | Projected capacitive touchscreen with support for two-finger multi-touch control |
| | Function Keys | - | 32 front-facing keys with tactile feedback that comply with UIC612-01 requirements | 32 front-facing keys with tactile feedback that comply with UIC612-01 requirements |
| I/O | USB | 1 x USB 2.0 (M12 A-coded) | 1 x USB 2.0 (M12 A-coded) | 1 x USB 2.0 (M12 A-coded) |
| | Video Output | 1 x DVI-D | 2 x RS-422/485 (M12 A-coded) | 2 x RS-422/485 (M12 A-coded) |
| Digital I/O | Input/Output | - | 5-ch / 1-ch, isolated (M12 A-coded) | 5-ch / 1-ch, isolated (M12 A-coded) |
| Software | Operating System | Linux Ubuntu 16.04 | Linux Ubuntu 16.04, Windows 10 | Linux Ubuntu 16.04, Windows 10 |
| Power | Input Voltage | 24/48/72/110 V _{DC} (±40%), 4-pole M12 connector | 24/48/72/110 V _{DC} (±40%), 4-pole M12 connector | 24/48/72/110 V _{DC} (±40%), 4-pole M12 connector |
| Environment | Operating Temperature | EN 50155 T1: -25 ~ +55 °C | EN 50155 T3: -25 ~ +70 °C (85 °C for 10 minutes) | EN 50155 T3: -25 ~ +70 °C (85 °C for 10 minutes) |
| | Vibration, Shock | EN 50155 | EN 50155 | EN 50155 |
| | Ingress Protection | IP-40 | IP-65 front cover | IP-65 front cover |
| Physical Characteristics | Dimensions (W x H x D) | 483 x 248 x 56 mm (19.0 x 9.8 x 2.2 lb) | 350 x 260 x 73 mm (13.8 x 10.2 x 2.9 in) | 310 x 214 x 73 mm (12.2 x 8.4 x 2.9 in) |
| | Weight | 5.5 kg (12.1 lb) | 5 kg (11 lb) | 4.5 kg (9.9 lb) |
| Certifications | Railway Related | EN 50155, EN 50121, IEC 61373, IEC60571 (EN 45545) | EN 50155, EN 50121, IEC 61373, IEC 60571, (EN 45545 compliant) | EN 50155, EN 50121, IEC 61373, IEC 60571, (EN 45545 compliant) |
| | EMC, Safty | CE/FCC Class A, UL | CE/FCC Class A, UL | CE/FCC Class A, UL |

2

Industrial Server

- 2-2 Storage Servers
- 2-4 GPU Servers
- 2-7 Server Boards
- 2-11 Server Chassis



Storage Servers

NEW



| Product Categories | | Storage Server | |
|--------------------|--------------------------------|---|---|
| Model Name | | SKY-5240 | ASR-3100 |
| System | Form Factor | 2U 4 Nodes | 1U 16 bay |
| | Number of Drives | 24 bays (2.5") | 16 bays (2.5") |
| | Drive Type | NVMe/SAS/SATA | NVMe/SAS/SATA |
| | CPU Type | Intel Xeon Scalable dual processors (up to 145W TDP) | Dual LGA 2011-R3 supports Intel® Xeon® E5-2600 V3/V4 series |
| | Chipset | Intel® C622 | Intel® C612 |
| | Memory Type | 24 x DDR4-2666 ECC RDIMMs (Up to 768 GB) | 16 x DDR4-2133 ECC RDIMM (up to 512 GB) |
| | Storage Expansion | - | - |
| | Configuration | - | - |
| | TPM | - | - |
| | Smart Fan Control | ✓ | ✓ |
| Expansion Slot | PCIe x16 | 2 Per Node (Supports HHHL) | - |
| | PCIe x8 | - | 2 (supports 1 x HHHL card and 1 x FHHL card) |
| Display | Integrated Chipset | - | - |
| | Display Memory | 64 MB | 64 MB |
| | VGA | ASPEED AST-2500 (Per Node) | ASPEED AST-2400 |
| Ethernet | RJ-45 Ethernet | 3 (Per Node) | 2 |
| I/O | Front I/O | - | 1 x USB 2.0 |
| | Rear I/O | Per Node 1 x VGA 2 x USB 3.0 3 x LAN RJ45 | 1 x VGA 1 x COM RS-232 4 x USB 3.0 2 x LAN RJ45 |
| | Internal I/O Connector | 2 x M.2 2280 Connector (Per Node) | 2 x M.2 connectors (2242) |
| Power Supply | Power Output | 2200W 80 PLUS Platinum 1+1 redundant power supply | 1100W redundant power |
| | Input Range | 220 ~ 240V _{AC} | 100 ~ 240V _{AC} |
| Mechanical | Dimensions (L x W x H) | 830 x 446 x 88 mm (32.68" x 17.56" x 3.46") | 806 x 430 x 44 mm (31.7" x 16.9" x 1.7") |
| | Weight | - | 17 kg (without hard drives) |
| Environmental | Operating Temperature | 0 ~ 35 °C (32 ~ 95 °F) | 0 ~ 40 °C (32 ~ 104 °F) |
| | Non-Operating Temperature | -20 ~ 60 °C (-4 ~ 140 °F) | -20 ~ 60 °C (-4 ~ 140 °F) |
| | Operating Humidity | 95% @ 40 °C, non-condensing | 10 ~ 85% @ 40 °C, non-condensing |
| | Non-Operating Humidity | 95% @ 40 °C, non-condensing | 10 ~ 95% @ 40 °C, non-condensing |
| | Operating Vibration (5~500 Hz) | 0.25Grms | 0.25Grms |
| Miscellaneous | Notification LED | Power status, HDD Status, Fan Status, Location, Overheat, Node Status, Node Alert | Power Status, System Error, HDD Status, LAN LED, Location |

✓: supported, -: not supported, △: optional



| Product Categories | | Disk Expansion Enclosure | Storage Server |
|--------------------|--------------------------------|--|---|
| Model Name | | SKY-4120B | SKY-4311 |
| System | Form Factor | 2U 24 bay | 1U 8 bay |
| | Number of Drives | 24 bays (2.5") | 8 bays (2.5") |
| | Drive Type | 12/6 Gb/s SAS | NVMe/SATA |
| | CPU Type | - | Dual LGA 2011-R3 supports Intel® Xeon® E5-2600 V3/ V4 series |
| | Chipset | - | Intel® C612 |
| | Memory Type | - | 16 x DDR4-2133 ECC RDIMM (up to 512 GB) |
| | Storage Expansion | 3 x Mini-SAS HD wide-ports (2 for SAS in, 1 for SAS out) | 2 x PCIe x8 (Gen3) (supports 1 x HHHL card and 1 x FHHL card) |
| | Configuration | Redundant controller | - |
| | TPM | - | - |
| | Smart Fan Control | ✓ | ✓ |
| Expansion Slot | PCIe x16 | - | - |
| | PCIe x8 | - | 2 (supports 1 x HHHL card and 1 x FHHL card) |
| Display | Integrated Chipset | - | - |
| | Display Memory | - | 1 GB |
| | VGA | - | ASPEED AST-2400 |
| Ethernet | RJ-45 Ethernet | Remote management - SNMP trap supported | 2 |
| I/O | Front I/O | - | 1 x USB 2.0 |
| | Rear I/O | 1 x LAN RJ45 3 x Mini-SAS HD wide-ports (2 for SAS in, 1 for SAS out) | 1 x VGA 1 x COM RS-232 4 x USB 3.0 2 x LAN RJ45 |
| | Internal I/O Connector | - | 2 x M.2 connectors (2242) |
| Power Supply | Power Output | 550W redundant power | 1100W redundant power |
| | Input Range | 100 ~ 240V _{AC} | 100 ~ 240V _{AC} |
| Mechanical | Dimensions (L x W x H) | 502 x 438 x 88.4 mm (19.7" x 17.2" x 3.4") | 626 x 430 x 44 mm (24.6" x 16.9" x 1.7") |
| | Weight | 20 kg (without hard drives) | 15 kg (without hard drives) |
| Environmental | Operating Temperature | 0 ~ 40 °C (32 ~ 104 °F) | 0 ~ 40 °C (32 ~ 104 °F) |
| | Non-Operating Temperature | -40° C ~ 60° C (-40° F ~ 140° F) | -20 ~ 60 °C (-4 ~ 140 °F) |
| | Operating Humidity | 95% @ 40° C, non-condensing | 10 ~ 85% @ 40 °C, non-condensing |
| | Non-Operating Humidity | 95% @ 60° C, non-condensing | 10 ~ 95% @ 40 °C, non-condensing |
| | Operating Vibration (5~500 Hz) | 0.25Grms | 0.25Grms |
| Miscellaneous | Notification LED | System power, system alert, location, controller fan, controller temperature, controller ready | Power Status, System Error, HDD Status, LAN LED, Location |

✓: supported, -: not supported, △: optional

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O Modules

8

Industrial I/O and Video Solutions

GPU Servers

NEW



NEW



NEW



| Model Name | | SKY-6100 | | SKY-6200 | | SKY-6400 | |
|--------------------------|------------------------|---|-------------------------------|---|------------------------------|--|------------------------------|
| Processor Support | | Intel LGA3647-P0 Xeon Scalable processor (up to 140W TDP) | | Intel LGA3647-P0 Xeon Scalable processor (up to 140W TDP) | | Intel LGA3647-P0 Xeon Scalable processor (up to 205W TDP) | |
| Expansion Slots | | 5 x PCIe x16 slot (Gen3 x16 link) for five HH/HL cards or one FH/FL + one FH/HL card. | | Four PCIe x16 slot (Gen3 x16 link) for 4 x/10.5" + one PCIe x8 slot (Gen3 x8 link) for FH/HL card | | 4 x PCIe x16 slot (Gen3 x16 link) for FH/10.5" double-deck cards + one PCIe x8 slot (Gen3 x8 link) for FH/HL card + one PCIe x4 slot (Gen3 x4 link) for FH/HL card | |
| Drive Bay | Slim ODD Bay | 0 | | 1 | | - | |
| | 2.5" Hot Swap | 2 | | 8 | | - | |
| | 2.5" Internal | - | | - | | - | |
| | 3.5" Hot Swap | - | | - | | 8 | |
| Cooling | Chassis Fan | 6 x 4056 high speed fan + 1 x 4028 system fan | | 2 x 8038 CPU fan + 4 x 8038 card cage fan | | 4 x 12038 system fan | |
| | Air Filter | - | | - | | - | |
| Chassis Intrusion Alarm | | ✓ | | ✓ | | ✓ | |
| Front USB | | 2 x USB2.0 | | 2 x USB2.0 | | 2 x USB3.0 | |
| Miscellaneous | LED Indicators | Power Status, LAN Status, System information LED | | Power Status, LAN Status, System information LED | | Power status, HDD activity, LAN1 & LAN2 | |
| | Rear Panel | - | | - | | - | |
| Environment | Temperature | Operating | Non-Operating | Operating | Non-Operating | Operating | Non-Operating |
| | | 0 ~ 35 °C (32 ~ 95 °F) | -40 ~ 60 °C (-40 ~ 140 °F) | 0 ~ 35 °C (32 ~ 95 °F) | -20 ~ 60 °C (-4 ~ 140 °F) | 0 ~ 35 °C (32 ~ 95 °F) | -20 ~ 60 °C (-4 ~ 140 °F) |
| | Humidity | 95% @ 40 °C | 95% @ 60 °C | 10 ~ 85% @ 40 °C | 10 ~ 95% @ 40 °C | 95% @ 40 °C | 95% @ 40 °C |
| | Vibration (5~500 Hz) | 0.25 Grms | 2 G | 0.5 Grms | 2 G | 0.25 Grms | 2 G |
| | Shock | 10G (with 11ms duration, half since wave) | △ | 10G (with 11ms duration, half since wave) | 30G | 10G (with 11ms duration, half since wave) | △ |
| Physical Characteristics | Dimensions (W x H x D) | 438 x 44 x 650 (17.24" x 1.7" x 25.6") | | 438 x 44 x 760 (17.24" x 1.7" x 29.92") | | 435 x 177 x 673 mm (17.12" x 6.96" x 26.49") | |

✓: supported, -: not supported, △: optional



| Model Name | | AGS-913 | AGS-923 | HPC-7400-S813 |
|--------------------------|------------------------|---|---|--|
| Processor Support | | Dual Intel® Xeon® E5-2600 v3/v4 | Dual Intel® Xeon® E5-2600 v3/v4 | Single Intel® Xeon® E5-2600 v3/v4 |
| Expansion Slots | | 3 x PCIe x16 double-depth card + 1 x PCIe x8 FH/HL card | 4 x PCIe x16 double-depth card + 1 x PCIe x8 FH/HLcard | 2 x PCIe x16 double-depth card + 1 x PCIe x8 + PCIe x4 + 1 x PCIe x1 |
| Drive Bay | Slim ODD Bay | - | - | - |
| | 2.5" Hot Swap | 4 | 8 | - |
| | 3.5" Hot Swap | - | - | 2 |
| Cooling | Chassis Fan | 7 x 40x56 + 2 x 40x28 high speed fan | 4 x 80x38 + 1 x 80x20 + 1 x 80x38 (Δ) high speed fan | 3 x 80x38 + Δ 2 (6cm) rear fans |
| | Air Filter | - | - | ✓ |
| Chassis Intrusion Alarm | | ✓ | ✓ | ✓ |
| Front USB | | 2 | 2 | 2 |
| Miscellaneous | LED Indicators | Power status, HDD activity, LAN status, location, error message | Power status, HDD activity, LAN status, location, error message | Power switch and system reset button |
| | Rear Panel | Location, error message | Location, error message | - |
| Environment | Operating | | Non-Operating | |
| | Temperature | 0 ~ 40 °C (32~104 °F) | -20 ~ 60 °C (-4 ~ 140 °F) | |
| | Humidity | 10 ~ 85% @ 40 °C | 10 ~ 95% @ 40 °C | |
| | Vibration (5~500 Hz) | 0.5 Grms | 2G | 2G |
| | Shock | 10 G (with 11ms duration, half sine wave) | 10 G (with 11ms duration, half sine wave) | 10 G (with 11ms duration, half sine wave) |
| Physical Characteristics | Dimensions (W x H x D) | 430 x 44 x 770 mm (16.9" x 1.7" x 30.3") | 430 x 88 x 770 mm (16.9" x 3.4" x 30.3") | 482 x 177 x 448 mm (18.9" x 6.9" x 17.6") |



| Model Name | | HPC-7400-S923 | HPC-7483-S923 |
|--------------------------|--------------------------|---|--|
| Processor Support | | Intel Xeon E5-2500 v4/v3 processor | |
| Expansion Slots | | 3 x PCIe x 16 double-depth cards | 4 x PCIe x 16 double-depth cards |
| Drive Bay | Slim ODD Bay | - | - |
| | 2.5" Internal | 2 rear-accessible (3.5"/2.5") | 2 |
| | 2.5" Hot Swap | - | |
| | 3.5" (internal) | 2 rear-accessible (3.5"/2.5") | 8 |
| | 5.25" (front accessible) | 2 | 3 |
| Cooling | Chassis Fan | (8 cm/1.41.9 CFM) + Δ 2 (6 cm) rear fans | 3 (12 cm / 226.5 CFM)+ Δ 2 (8 cm) rear fans |
| | Air Filter | ✓ | - |
| Chassis Intrusion Alarm | | ✓ | ✓ |
| Front USB | | 2 | 2 |
| Miscellaneous | LED Indicators | Power switch , system reset button,HDD, LAN1,LAN2 | System: Power, HDD, LAN1, LAN2, System information HDD Tray: HDD Power and Activity LED |
| | Rear Panel | - | Two 9-pin D-Sub and two PS2 and two USB |
| Environment | | Operating | Non-Operating |
| | Temperature | 0 ~ 35 °C (32 ~ 95 °F) | -20 ~ 60 °C (-4 ~ 140 °F) |
| | Humidity | 10 ~ 85% @ 35 °C | 10 ~ 95% @ 40 °C |
| | Vibration (5~500 Hz) | 1 Grms | 2 G |
| | Shock | 10G | |
| Physical Characteristics | Dimensions (W x H x D) | 482x 177 x 448 mm (18.9" x 6.9" x 17.6") | 435 x 177 x 658 mm (17.1" x 6.9" x 25.9") |

✓: supported, -: not supported, Δ: optional

GPU Servers

Compatible GPU/Xeon Phi

| Advantech Product Model | | | 1U | | 2U | | 3U chassis HPC-7320/ 4U chassis HPC-7483 & HPC-7400 | | | | | 4U | | | |
|----------------------------|-------------|-------|---------|----------|---------|----------|--|----------|----------|----------|----------|---------------|---------------|---------------|----------|
| | | | AGS-913 | SKY-6100 | AGS-923 | SKY-6200 | ASMB-813 | ASMB-822 | ASMB-913 | ASMB-922 | ASMB-923 | HPC-7400-S813 | HPC-7400-S923 | HPC-7483-S923 | SKY-6400 |
| Nvidia | Tesla | P100 | * | ✓ | * | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | * | ✓ |
| | | P40 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | * | ✓ |
| | | M60 | * | ✓ | * | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | * | ✓ | ✓ | ✓ |
| | | M40 | * | ✓ | * | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | * | * | ✓ |
| | | K80 | ✓ | ✓ | * | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | * | * | ✓ | ✓ |
| | | K40 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| AMD | Workstation | W9000 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | | W9100 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Server | S9000 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | | S9150 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |

Note:

1. ✓ means they have already passed compatibility tests (GPU card and driver install).

2. * means qualified tesla server by Nvidia

3. Some GPU cards need to enable "Above 4G Decoding" in BIOS setup menu when installing multiple GPU cards

GPU P/N

| Cat. | Part Number | Description |
|-------------------------|--------------------|--|
| NVS series GPU cards | SKY-NVS-810E | NVS 810 4GB PCI-E x16 MDP*8 FS |
| Quadro series GPU cards | SKY-QUAD-GP100 | Quadro GP100 16GB PCI-Ex16 DVI-D*1 DP*4 FS |
| | SKY-QUAD-M5000E | Quadro M5000 8GB PCI-Ex16 DVI*1 DP*4 FS |
| | SKY-QUAD-M6000-2E | Quadro M6000 24GB PCI-Ex16 DVI*1 DP*4 FS |
| | SKY-QUAD-M6000E | Quadro M6000 12GB PCI-Ex16 DVI*1 DP*4 FS |
| | SKY-QUAD-P400 | Quadro P400 2GB PCI-Ex16 MDP*2 FS |
| | SKY-QUAD-P600 | Quadro P600 2GB PCI-Ex16 MDP*4 FS |
| | SKY-QUAD-P1000 | Quadro P1000 4GB PCI-Ex16 MDP*4 FS |
| | SKY-QUAD-P2000 | Quadro P2000 5GB PCI-Ex16 DP*4 FS |
| | SKY-QUAD-P4000 | Quadro P4000 8GB PCI-Ex16 DP*4 FS |
| | SKY-QUAD-P5000E | Quadro P5000 12GB PCI-Ex16 DVI-D*1 DP*4 FS |
| Tesla series GPU cards | SKY-QUAD-P6000E | Quadro P6000 24GB PCI-Ex16 DVI-D*1 DP*4 FS |
| | SKY-TESL-K40-AE | Tesla K40 12GB PCI-E x16 FS |
| | SKY-TESL-K40-PE | Tesla K40 12GB PCI-E x16 HS |
| | SKY-TESL-K80E | Tesla K80 24GB PCI-E x16 HS |
| | SKY-TESL-M10-PE | Tesla M10 32GB PCI-E x16 HS |
| | SKY-TESL-M40-2E | Tesla M40 24GB PCI-E x16 HS |
| | SKY-TESL-M40E | Tesla M40 12GB PCI-E x16 HS |
| | SKY-TESL-M4E | Tesla M4 4GB PCI-E x16 HS/Low profile |
| | SKY-TESL-M6-MXM-PE | Tesla M6 8GB MXM3.1 type B HS |
| | SKY-TESL-M60-PLRE | Tesla M60 16GB PCI-E x16 HS L to R |
| | SKY-TESL-M60-PRLE | Tesla M60 16GB PCI-E x16 HS R to L |
| | SKY-TESL-P100-16P | Tesla P100-PCI-E-16GB x16 HS |
| | SKY-TESL-P100-PE | Tesla P100 12GB PCI-E x16 HS |
| | SKY-TESL-P4-PE | Tesla P4 8GB PCI-E x16 HS |
| | SKY-TESL-P40-PE | Tesla P40 24GB PCI-E x16 HS |

Server Boards

NEW



NEW



| Model Name | | ASMB-260 | ASMB-584 | ASMB-585 | ASMB-586 | ASMB-782 |
|--------------------|-------------------------|--|--|--|--|--|
| Form Factor | | Mini-ITX | Micro ATX | Micro ATX | Micro ATX | ATX |
| Processor System | CPU | Intel® Atom® C3000 Series | Intel® Xeon® E3 v3 and 4th Gen. Core™ i3/i5/i7 Series | Intel® Xeon® E3 v5/v6 and 6th/7th Gen. Core™ i3/i5/i7 Series | Intel® Xeon® E & 8th Gen. Core™ i3/i5/i7 Series | Intel Xeon E3/E3 v2/ 2nd and 3rd Gen. Core i7/i5/i3/ Pentium Series |
| | Socket | - | 1 x socket 1150 | 1 x socket 1151 | 1 x socket 1151 | 1 x socket 1155 |
| | Max. Speed | 2.2 GHz | 3.5 GHz | 3.6 GHz | 3.7 GHz | 3.5 GHz |
| | Front Side Bus | - | - | - | - | - |
| | L3 Cache | 2 MB (based on CPU sku) | 8 MB | 8 MB | 13.5 MB | 8 MB |
| | Chipset | - | Intel C226 | Intel C236 | Intel C246 | Intel C216 |
| Expansion Slot | BIOS | AMI 128 Mbit, SPI | AMI 128Mbit, SPI | AMI 128Mbit, SPI | AMI 128Mbit, SPI | AMI 64 Mbit, SPI |
| | PCI | - | 1* | - | - | 3 |
| | PCIe x16 | - | - | 1 (Gen3 x16 link) | 1 | - |
| | PCIe x8 | - | 2 (x16 slot with x8 link) | - | - | 2 (x16 slot with x8 link) |
| | PCIe x4 | 1 (1 Gen3 x 4 link) | 1 | 3 (2 Gen3 x4 link, 1 Gen3 x1 link) | 2 | 2 |
| Memory | PCIe x1 | - | - | - | 1 | - |
| | Technology | DDR4 Reg/unbuffered 2400/2133/1866/1600 Mhz DIMM | DDR3 ECC/non-ECC Unbuffer 1066/1333/1600 Mhz | DDR4 ECC/non-ECC Unbuffer 1600/1866/2133/2400 Mhz | DDR4 ECC/non-ECC Unbuffer 2133/2400/2666 Mhz | DDR3 ECC/Non-ECC Unbuffer 1066/1333/1600 Mhz |
| | Max. Capacity | 128 GB for RDIMM/ 64GB for UDIMM | 32 GB ECC/Non-ECC UDIMM | 64 GB ECC/Non-ECC UDIMM | 64 GB ECC/Non-ECC UDIMM | 32 GB ECC/Non-ECC UDIMM |
| Graphics | Socket | 4x 288-pin DIMM | 4 x 240-pin DIMM | 4 x 288-pin DIMM | 4 x 288-pin DIMM | 4 x 240-pin DIMM |
| | Controller | AST2500 | Intel GT2-HD Graphics 1 GB maximum shared memory with 2 GB and above system memory installed | Intel GT2-HD Graphics 1 GB maximum shared memory with 2 GB and above system memory installed | Intel GT2-HD Graphics 1 GB maximum shared memory with 2 GB and above system memory | Intel HD Graphics 1 GB maximum shared memory with 2 GB and above system memory installed |
| | VRAM | DDR3 64MB | - | - | - | - |
| | LCD | - | - | - | - | - |
| | TV-Out | - | - | - | - | - |
| | HDMI | - | - | - | 1 | - |
| | DVI | - | 1 | 2 | 1 | ✓ (pin header) |
| | Dual Display | ✓ | ✓ | ✓ | ✓ | ✓ (pin header for DVI) |
| Ethernet | Interface | 10/100/1000 Mbps Gigabit & 10GBase-T Ethernet | 10/100/1000 Mbps Gigabit Ethernet | 10/100/1000 Mbps Gigabit Ethernet | 10/100/1000 Mbps Gigabit Ethernet | 10/100/1000 Mbps Gigabit Ethernet |
| | Controller | 2 x Intel I210AT + 1 x Intel X557-AT2 | 1 x Intel I217LM, 1 x Intel I210AT (G2 SKU only) | 1 x Intel I219LM, 3 x Intel I210AT (G4 SKU only) | 1 x Intel I219LM, 3 x Intel I210AT (G4 SKU only) | 1 x Intel 82579LM + 3 x Intel 82574L (G4 SKU only) |
| | Connector | RJ-45 x 3 (1 sharing IPMI function) | RJ-45 x 2 (G2 SKU) / RJ-45 x1 (VG SKU) | RJ-45 x 2 (G2 SKU) / RJ-45 x4 (G4 SKU) | RJ-45 x 2 (G2 SKU) / RJ-45 x4 (G4 SKU) | RJ-45 x 4 (G4 SKU) / RJ-45 x 2 (G2 SKU) |
| TPM | | Optional | Optional | Optional | Optional | Optional |
| SATA | Max. Data Transfer Rate | 600MB/s for SATA3 | 600 MB/s | 600 MB/s | 600 MB/s | 300MB/s for SATA2 600 MB/s for SATA3 |
| | Channel | Up to 8 | 6 | 7 | 8 | 4 for SATA2, 2 for SATA3 |
| SAS | Max. Data Transfer Rate | - | - | - | - | - |
| | Channel | - | - | - | - | - |
| Rear I/O | VGA/DVI/HDMI/DP | 1 / - / - / - | 1 / 1 / - / 2 | 1 / 2 / - / - | 1 / 1 / 1 / - | 1 / - / - / - |
| | Ethernet | 3 | 2 for G2 SKU and 1 for VG SKU | 2 for G2 SKU and 4 for G4 SKU | 2 for G2 SKU and 4 for G4 SKU | 4 for G4 SKU and 2 for G2 SKU |
| | USB | 2 (USB 3.0) | 4 (2 USB 3.0; 2 USB 2.0) | 4 (USB 3.0) | 4 (USB 3.1) | 4 (2 USB 3.0; 2 USB 2.0) |
| | Audio | - | Mic-in, Line-out | Mic-in, Line-out | Mic-in, Line-out | - |
| | Parallel | - | - | - | - | - |
| | Serial | 1 (RS-232) | - | 1 (RS-232) | 1 (RS-232) | 1 (RS-232) |
| | PS/2 | - | - | - | - | 2 |
| Internal Connector | DVI | - | - | - | - | ✓ (pin header) |
| | USB | 2 (2 USB3.0) | 9 (2 USB 3.0; 6 USB 2.0; 1 USB 2.0 Type A) | 9 (2 USB 3.0; 6 USB 2.0; 1 USB 2.0 Type A) | 9 (2 USB 3.0; 6 USB 2.0; 1 USB 2.0 Type A) | 10 (2 USB 3.0; 6 USB 2.0; 2 USB 2.0 Type-A) |
| | Audio | - | 1 | 1 | 1 | 1 |
| | Serial | 1 | 2 | 3 | 1 | 1 |
| | Parallel | - | 1 | - | - | 1 |
| | SATA | 8 | 6 | 7 | 8 | 6 |
| | SAS | - | - | - | - | - |
| | Compact Flash | - | - | - | - | - |
| Watchdog Timer | GPIO | 8 bit GPIO | 8 bit GPIO | 8 bit GPIO | 8 bit GPIO | 1 (SATA SGPIO) |
| | Output | System reset | System reset | System reset | System reset | System reset |
| | Interval | Programmable, 1 ~ 255 sec | Programmable, 1 ~ 255 sec | Programmable, 1 ~ 255 sec | Programmable, 1 ~ 255 sec | Programmable, 1 ~ 255 sec |

* ASMB-584 A2 version has removed PCI slot for 1U & 2U chassis with riser.

✓: supported, -: not supported, △: optional

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O Modules

8

Industrial I/O and Video Solutions

Server Boards

NEW



| Model Name | | ASMB-784 | ASMB-785 | ASMB-786 | ASMB-822 | ASMB-813 |
|--------------------|-------------------------|--|--|--|--|--|
| Form Factor | | ATX | ATX | ATX | ATX | ATX |
| Processor System | CPU | Intel® Xeon® E3 v3 and 4th Gen. Core™ i3/i5/i7 Series | Intel® Xeon® E3 v5/v6 and 6th/7th Gen. Core™ i3/i5/i7 Series | Intel® Xeon® E & 8th Gen. Core™ i3/i5/i7 Series | Intel® Xeon® E5-1600/1600 v2 / 2600 / 2600 v2 | Intel® Xeon® E5-1600 v3/v4 and 2600 v3/v4 Series Core i7 Series |
| | Socket | 1 x socket 1150 | 1 x socket 1151 | 1 x socket 1151 | 1 x socket 2011 | 1 x socket 2011-R3 |
| | Max. Speed | 3.5 GHz | 3.6 GHz | 3.7 GHz | 3.7 GHz | 2.5 GHz |
| | Front Side Bus | - | - | - | - | QPI 9.6GT/s |
| | L3 Cache | 8MB | 8MB | 13.5 MB | 20 MB | 30 MB |
| | Chipset | Intel C226 | Intel C236 | Intel C246 | Intel C602J | Intel C612 |
| Expansion Slot | BIOS | AMI 128Mbit, SPI | AMI 128Mbit, SPI | AMI 128Mbit, SPI | AMI 64 Mbit, SPI | AMI 128 Mbit, SPI |
| | PCI | 3 | 3 | - | 1 | - |
| | PCIe x16 | 1 (switchable to two x8) | 1 (switchable to two x8) | 1 (switchable to two x8) | - | 2/0 |
| | PCIe x8 | 2 (switchable to one x16) | 2 (switchable to one x16) | 2 (switchable to one x16) | 5 | 1/5 |
| | PCIe x4 | - | - | 2 | 1 | 1 |
| Memory | PCIe x1 | 2 | 2 | 3 | - | 1 |
| | Technology | DDR3 ECC/Non-ECC Unbuffer 1066/1333/1600 MHz | DDR4 ECC/Non-ECC Unbuffer 1600/1866/2133/2400 MHz | DDR4 ECC/non-ECC Unbuffer 2133/2400/2666 MHz | DDR3 REG/ECC/Non-ECC Unbuffer 1066/1333/1600 MHz | DDR4 REG 2400/2133/1866/1600/1333 MHz DIMM |
| | Max. Capacity | 32 GB ECC/Non-ECC UDIMM | 64 GB ECC/Non-ECC UDIMM | 64 GB ECC/Non-ECC UDIMM | 96 GB/Non-ECC/ECC/REG DIMM | 256 GB REG DIMM |
| Graphics | Socket | 4 x 240-pin DIMM | 4 x 288-pin DIMM | 4 x 288-pin DIMM | 6 x 240-pin DIMM | 8 x 288-pin DIMM |
| | Controller | Intel GT2-HD Graphics | Intel GT2-HD Graphics | Intel GT2-HD Graphics | AST1300/AST2300 | AST1400/AST2400 |
| | VRAM | 1 GB maximum shared memory with 2 GB and above system memory installed | 1 GB maximum shared memory with 2 GB and above system memory installed | 1 GB maximum shared memory with 2 GB and above system memory | DDR3 64MB | DDR3 64MB |
| | LCD | - | - | - | - | - |
| | TV-Out | - | - | - | - | - |
| | HDMI | - | - | 1 | - | - |
| Ethernet | DVI | 2 | 2 | 1 | - | - |
| | Dual Display | ✓ | ✓ | ✓ | - | - |
| | Interface | 10/100/1000 Mbps Gigabit Ethernet | 10/100/1000 Mbps Gigabit Ethernet | 10/100/1000 Mbps Gigabit Ethernet | 10/100/1000 Mbps Gigabit Ethernet | 10/100/1000 Mbps Gigabit Ethernet |
| | Controller | 1 x Intel I217LM + 3 x Intel I210AT (G4 SKU only) | 1 x Intel I219LM + 3 x Intel I210AT (G4 SKU only) | 1 x Intel I219LM + 3 x Intel I210AT (G4 SKU only) | 1 x Intel 82579LM + 1 x Intel I210AT + 1 x Realtek 8201EL (ASMB-8221 SKU only) | 2 x Intel I210AT |
| TPM | Connector | RJ-45 x 4 (G4 SKU) / RJ-45 x2 (G2 SKU) | RJ-45 x 2 (G2 SKU) / RJ-45 x4 (G4 SKU) | RJ-45 x 2 (G2 SKU) / RJ-45 x4 (G4 SKU) | RJ-45 x 3 (1 for IPMI function) | RJ-45 x 3 (1 for IPMI function) |
| | | △ | △ | △ | △ | △ |
| SATA | Max. Data Transfer Rate | 600 MB/s | 600 MB/s | 600 MB/s | 300MB/s for SATA2 600 MB/s for SATA3 | 600MB/s for SATA3 |
| | Channel | 6 | 6 | 8 | 4 for SATA2, 2 for SATA3 | 8 for SATA3 |
| SAS | Max. Data Transfer Rate | - | - | - | - | - |
| | Channel | - | - | - | - | - |
| Rear I/O | VGA/DVI/HDMI/DP | 1 / 2 / - / - | 1 / 2 / - / - | 1 / 1 / 1 / - | 1 / - / - / - | 1 / - / - / - |
| | Ethernet | 4 for G4 SKU and 2 for G2 SKU | 2 for G2 SKU and 4 for G4 SKU | 2 for G2 SKU and 4 for G4 SKU | 2 | 2 |
| | USB | 4 (2 USB 3.0; 2 USB 2.0) | 4 (USB 3.0) | 4 (USB 3.1) | 6 (2 x USB 3.0) | 4 (USB 3.0), 2 (USB 2.0) |
| | Audio | - | Mic-in, Line-out | Mic-in, Line-out | - | - |
| | Parallel | - | - | - | - | - |
| | Serial | 1 (RS-232) | 1 (RS-232) | 1 (RS-232) | 1 (RS-232) | 1 (RS-232) |
| Internal Connector | PS/2 | 2 | - | - | 2 | 2 |
| | DVI | - | - | - | - | - |
| | USB | 9 (2 USB 3.0; 6 USB 2.0; 1 USB 2.0 Type A) | 9 (2 USB 3.0; 6 USB 2.0; 1 USB 2.0 Type A) | 9 (2 USB 3.0; 6 USB 2.0; 1 USB 2.0 Type A) | 8 (6 USB 2.0, 2 USB 2.0 Type-A) | 5 (2 USB3.0, 2 USB2.0, 1 USB 2.0 Type-A) |
| | Audio | 1 | 1 | 1 | 1 | 1 |
| | Serial | 1 | 3 | 1 | 1 | 1 |
| | Parallel | 1 | 1 | 1 | 1 | - |
| | SATA | 6 | 6 | 8 | 6 | 8 |
| | SAS | - | - | - | - | - |
| | Compact Flash | - | - | - | - | - |
| | GPIO | 8 bit GPIO | 8 bit GPIO | 8 bit GPIO | 8 bit GPIO | 8 bit GPIO |
| Watchdog Timer | Output | System reset | System reset | System reset | System reset | System reset |
| | Interval | Programmable 1~255 sec | Programmable 1~255 sec | Programmable 1~255 sec | Programmable, 1 ~ 255 sec | Programmable, 1 ~ 255 sec |

* ASMB-584 A2 version has removed PCI slot for 1U & 2U chassis with riser.

✓: supported, -: not supported, △: optional



| Model Name | | ASMB-823 | ASMB-815 | ASMB-825 | ASMB-922 |
|--------------------|-------------------------|--|---|---|---|
| Form Factor | | ATX | ATX | ATX | EATX |
| Processor System | CPU | Intel® Xeon® E5-2600 v3/v4 Series | Intel® Xeon® Scalable Series | Intel® Xeon® Scalable Series | Intel® Xeon® E5-2600 / 2600 v2 |
| | Socket | 2 x socket 2011-R3 | 1 x socket 3647-P0 | 2 x socket 3647-P0 | 2 x socket 2011 |
| | Max. Speed | 2.5 GHz | 3.6 GHz | 3.6 GHz | 2.1 GHz |
| | Front Side Bus | QPI 9.6GT/s | Up to UPI 10.4 GT/s | Up to UPI 10.4 GT/s | QPI 8 GT/s |
| | L3 Cache | 30 MB | 38.5 MB | 38.5 MB | 20 MB |
| | Chipset | Intel C612 | Intel C620 | Intel C620 | Intel C602J |
| | BIOS | AMI 128 Mbit, SPI | AMI 256 Mbit, SPI | AMI 256 Mbit, SPI | AMI 64 Mbit, SPI |
| Expansion Slot | PCI | - | - | - | - |
| | PCIe x16 | 4 | 2/0 | 4 | 4 (1 for PME) |
| | PCIe x8 | 2 | 1/5 | 2 | 1 |
| | PCIe x4 | 1 (x8 slot with x4 link) | 1 | - | - |
| | PCIe x1 | - | 1 | - | - |
| Memory | Technology | DDR4 REG 2400/2133/1866/1600/1333 MHz DIMM | DDR4 REG 2666/2400/2133 MHz DIMM | DDR4 REG 2666/2400/2133 MHz DIMM | DDR3 REG/ECC/non-ECC Unbuffer 1066/1333/1600 MHz |
| | Max. Capacity | 192 GB REG DIMM | 192 GB REG DIMM | 192 GB REG DIMM | 128 GB/Non-ECC/ECC/REG DIMM |
| | Socket | 6 x 288-pin DIMM | 6 x 288-pin DIMM | 8 x 288-pin DIMM | 8 x 240-pin DIMM |
| Graphics | Controller | AST1400/AST2400 | AST2510/AST2500 | AST2510/AST2500 | AST1300/AST2300 |
| | VRAM | DDR3 64MB | DDR3 64MB | DDR3 64MB | DDR3 64MB |
| | LCD | - | - | - | - |
| | TV-Out | - | - | - | - |
| | HDMI | - | - | - | - |
| | DVI | - | - | - | - |
| | Dual Display | - | - | - | - |
| Ethernet | Interface | 10/100/1000 Mbps Gigabit Ethernet | 10/100/1000 Mbps Gigabit & 10GBase-T Ethernet | 10/100/1000 Mbps Gigabit & 10GBase-T Ethernet | 10/100/1000 Mbps Gigabit Ethernet |
| | Controller | 2 x Intel I210AT | 2 x Intel I210AT + 1 x Intel X557-AT2 1 x Realtek 8201EL (ASMB-815/815T2 SKUs) | 2 x Intel I210AT + 1 x Intel X557-AT2 | 1 x Intel 82579LM + 1 x Intel I210AT 1 x Realtek 8201EL (ASMB-922I SKU only) |
| | Connector | RJ-45 x 3 (1 sharing IPMI function) | RJ-45 x 5 (1 for IPMI function) | RJ-45 x 4 (1 sharing IPMI function) | RJ-45 x 3 (1 for IPMI function) |
| TPM | | △ | △ | △ | △ |
| SATA | Max. Data Transfer Rate | 600MB/s for SATA3 | 600MB/s for SATA3 | 600MB/s for SATA3 | 300MB/s for SATA2 600 MB/s for SATA3 |
| | Channel | 9 for SATA3 | 9 for SATA3 | 9 for SATA3 | 4 for SATA2, 2 for SATA3 |
| SAS | Max. Data Transfer Rate | - | - | - | - |
| | Channel | - | - | - | - |
| Rear I/O | VGA/DVI/HDMI/DP | 1 / - / - / - | 1 / - / - / - | 1 / - / - / - | 1 / - / - / - |
| | Ethernet | 2 | 4 (T2 SKU) | 4 (T2 SKU) | 2 |
| | USB | 4 (USB 3.0) | 4 (USB 3.0), 2 (USB 2.0) | 2 (USB 3.0) | 4 (2 x USB 3.0) |
| | Audio | - | - | - | - |
| | Parallel | - | - | - | - |
| | Serial | - | 1 (RS-232) | 1 (RS-232) | 1 (RS-232) |
| | PS/2 | - | - | - | 2 |
| Internal Connector | DVI | - | - | - | - |
| | USB | 5 (2 USB3.0, 2 USB2.0, 1 USB 2.0 Type-A) | 5 (2 USB3.0, 4 USB2.0, 1 USB 2.0 Type-A) | 5 (4 USB3.0, 4 USB2.0, 1 USB 2.0 Type-A) | 9 (8 USB 2.0, 1 USB 2.0 Type-A) |
| | Audio | 1 | 1 | 1 | 1 |
| | Serial | 1 | 1 | 1 | 1 |
| | Parallel | - | - | - | - |
| | SATA | 9 | 8 | 8 | 6 |
| | SAS | - | - | - | - |
| | Compact Flash | - | - | - | - |
| | GPIO | 8 bit GPIO | 8 bit GPIO | 8 bit GPIO | 8 bit GPIO |
| Watchdog Timer | Output | System reset | System reset | System reset | System reset |
| | Interval | Programmable, 1 ~ 255 sec | Programmable, 1 ~ 255 sec | Programmable, 1 ~ 255 sec | Programmable, 1 ~ 255 sec |

✓: supported, -: not supported, △: optional

1
Software and Industry Solutions

2
Industrial Server

3
Intelligent System

4
Intelligent HMI and Monitors

5
Automation Computers and Controllers

6
Industrial Communication

7
Remote I/O Modules

8
Industrial I/O and Video Solutions

Server Boards

NEW



| Model Name | | ASMB-913 | ASMB-923 | ASMB-925 | ASMB-975 | ASMB-935 |
|--------------------|-------------------------|--|--|---|---|---|
| Form Factor | | EATX | EATX | EATX | Proprietary | EATX |
| Processor System | CPU | Intel® Xeon® E5-2600 v3/v4 Series | Intel® Xeon® E5-2600 v3/v4 Series | Intel® Xeon® Scalable Series | Intel® Xeon® Scalable Series | Intel® Xeon® Scalable Series |
| | Socket | 2 x socket 2011-R3 | 2 x socket 2011-R3 | 2 x socket 3647-P0 | 2 x socket 3647-P0 | 2 x socket 3647-P0 |
| | Max. Speed | 2.5 GHz | 2.5 GHz | 3.6 GHz | 3.6 GHz | 3.6 GHz |
| | Front Side Bus | QPI 9.6GT/s | QPI 9.6GT/s | Up to UPI 10.4 GT/s | Up to UPI 10.4 GT/s | Up to UPI 10.4 GT/s |
| | L3 Cache | 30 MB | 30 MB | 38.5 MB | 38.5 MB | 38.5 MB |
| | Chipset | Intel C612 | Intel C612 | Intel C620 | Intel C620 | Intel C620 |
| | BIOS | AMI 128 Mbit, SPI | AMI 128 Mbit, SPI | AMI 256 Mbit, SPI | AMI 256 Mbit, SPI | AMI 256 Mbit, SPI |
| Expansion Slot | PCI | - | - | 1 | - | - |
| | PCIe x16 | 4 (1 for PME) | 4 | 5 | 4 | 5 |
| | PCIe x8 | - | 2 | 1 | 1 | 1 |
| | PCIe x4 | - | 1 | - | 4 | - |
| | PCIe x1 | - | - | - | - | - |
| Memory | Technology | DDR4 REG 2400/2133/1866/1600/1333 MHz DIMM | DDR4 REG 2400/2133/1866/1600/1333 MHz DIMM | DDR4 REG 2666/2400/2133 MHz DIMM | DDR4 REG 2666/2400/2133 MHz DIMM | DDR4 REG 2666/2400/2133 MHz DIMM |
| | Max. Capacity | 512 GB REG DIMM | 256 GB REG DIMM | 384 GB REG DIMM | 384 GB REG DIMM | 768 GB REG DIMM |
| | Socket | 16 x 288-pin DIMM | 8 x 288-pin DIMM | 12 x 288-pin DIMM | 12 x 288-pin DIMM | 24 x 288-pin DIMM |
| Graphics | Controller | AST1400/AST2400 | AST1400/AST2400 | AST2510/AST2500 | AST2510/AST2500 | AST2510/AST2500 |
| | VRAM | DDR3 64MB | DDR3 64MB | DDR3 64MB | DDR3 64MB | DDR3 64MB |
| | LCD | - | - | - | - | - |
| | TV-Out | - | - | - | - | - |
| | HDMI | - | - | - | - | - |
| | DVI | - | - | - | - | - |
| | Dual Display | - | - | - | - | - |
| Ethernet | Interface | 10/100/1000 Mbps Gigabit Ethernet | 10/100/1000 Mbps Gigabit Ethernet | 10/100/1000 Mbps Gigabit & 10GBase-T Ethernet | 10/100/1000 Mbps Gigabit & 10GBase-T Ethernet | 10/100/1000 Mbps Gigabit & 10GBase-T Ethernet |
| | Controller | 4 x Intel I210AT | 2 x Intel I210AT | 2 x Intel I210AT + 1 x Intel X557-AT2 | 2 x Intel I210AT + 1 x Intel X557-AT2 | 2 x Intel I210AT + 1 x Intel X557-AT2 |
| | Connector | RJ-45 x 4 (1 sharing IPMI function) | RJ-45 x 3 (1 for IPMI function) | RJ-45 x 4 (1 sharing IPMI function) | RJ-45 x 4 (1 sharing IPMI function) | RJ-45 x 4 (1 sharing IPMI function) |
| TPM | | △ | △ | △ | △ | △ |
| SATA | Max. Data Transfer Rate | 600MB/s for SATA3 | 600MB/s for SATA3 | 600MB/s for SATA3 | 600MB/s for SATA3 | 600MB/s for SATA3 |
| | Channel | 8 for SATA3 | 10 for SATA3 | 8 for SATA3 | 14 for SATA3 | 10 for SATA3 |
| SAS | Max. Data Transfer Rate | - | - | - | - | - |
| | Channel | - | - | - | - | - |
| Rear I/O | VGA/DVI/HDMI/DP | 1 / - / - / - | 1 / - / - / - | 1 / - / - / - | 1 / - / - / - | 1 / - / - / - |
| | Ethernet | 4 | 2 | 4 (T2 SKU) | 4 (T2 SKU) | 4 (T2 SKU) |
| | USB | 2 (USB 3.0) | 2 (USB 3.0), 2 (USB 2.0) | 4 (USB 3.0) | 4 (USB 3.0) | 4 (USB 3.0) |
| | Audio | - | - | - | - | - |
| | Parallel | - | - | - | - | - |
| | Serial | 1 (RS-232) | 1 (RS-232) | 1 (RS-232) | 1 (RS-232) | 1 (RS-232) |
| | PS/2 | - | 2 | - | - | - |
| Internal Connector | DVI | - | - | - | - | - |
| | USB | 7 (4 USB3.0, 2 USB2.0, 1 USB 2.0 Type-A) | 7 (2 USB3.0, 4 USB2.0, 1 USB 2.0 Type-A) | 7 (2 USB3.0, 4 USB2.0, 1 USB 2.0 Type-A) | 11 (8 USB3.0, 2 USB2.0, 1 USB 2.0 Type-A) | 7 (2 USB3.0, 4 USB2.0, 1 USB 2.0 Type-A) |
| | Audio | 1 | 1 | 1 | 1 | 1 |
| | Serial | 1 | 1 | 1 | 1 | 1 |
| | Parallel | - | - | - | - | - |
| | SATA | 8 | 10 | 8 | 12 | 10 |
| | SAS | - | - | - | - | - |
| | M.2 | - | - | - | 2 x M.2 2280 (SATA) | 1 x M.2 2280 (SATA & PCIe) |
| | Compact Flash | - | - | - | - | - |
| Watchdog Timer | GPIO | 8 bit GPIO | 8 bit GPIO | 8 bit GPIO | 8 bit GPIO | 8 bit GPIO |
| | Output | System reset | System reset | System reset | System reset | System reset |
| | Interval | Programmable, 1 ~ 255 sec | Programmable, 1 ~ 255 sec | Programmable, 1 ~ 255 sec | Programmable, 1 ~ 255 sec | Programmable, 1 ~ 255 sec |

✓: supported, -: not supported, △: optional

Server Chassis

NEW



| Height (1U = 1.75") | | Tower | | | 1U | |
|---------------------------------------|---------------------------|--|--|---|--|--|
| Model Name | | HPC-2040 | HPC-5000 | HPC-7000 | HPC-7120S | HPC-7120 |
| Form Factor Support | | Mini iTX | Micro ATX | Micro ATX, ATX, EATX | Micro ATX, ATX | Micro ATX, ATX |
| No. of slots / No. of full-size cards | | 1/0 | 4/2 (11.73" Length) | 7/6 | 1/0 | 1/0 |
| Drive Bay | Slim ODD Bay | 1 | 1 | 1 | - | - |
| | 5.25" (front-accessible) | - | - | - | - | - |
| | 3.5" (hot-swappable) | 4 | - | - | - | - |
| | 3.5" (internal) | - | 2*3.5" or 1*3.5" + 1*2.5" | 3 (External) | - | - |
| | 2.5" (hot-swappable) | - | - | - | 2 (HPC-7120S-35ZXE only) | 2 x SATA III |
| | 2.5" (internal) | 1 | 2*3.5" or 1*3.5" + 1*2.5" | - | 2 | - |
| Cooling | Chassis Fan | 1 (12cm / 57.2CFM) | 1 (12cm / 82CFM) | 2 (12cm/150CFM) | 3 (4 cm/23.1 CFM) | 4 (4 cm/28.6 CFM) |
| | Air Filter | - | ✓ | - | - | - |
| Front I/O Interface | USB 3.0 | 2 | 2 | 2 | 2 | 2 |
| | USB 2.0 | - | 2 | - | - | - |
| Miscellaneous | LED Indicators | Power, LAN 1, LAN 2, HDD, System Information | System: Power | System: Power | System: Power, HDD, LAN1, LAN2, System Information HDD Tray: HDD Power and Activity LED | System: Power, HDD, LAN1, LAN2, System Information HDD Tray: HDD Power and Activity LED |
| | Rear Panel | One reserved DB-9 ports | Two reserved DB-9 ports | Two USB reserved ports | - | - |
| Environment | Operating Temperature | 0 ~ 40 °C (32 ~ 122 °F) | 0 ~ 40 °C (32 ~ 104 °F) | 0 ~ 40 °C (32 ~ 104 °F) | 0 ~ 40 °C (32 ~ 104 °F) | 0 ~ 40 °C (32 ~ 104 °F) |
| | Non-Operating Temperature | -40 ~ 60 °C (-40 ~ 140 °F) | -40 ~ 70 °C (-40 ~ 158 °F) | -40 ~ 70 °C (-40 ~ 158 °F) | -40 ~ 70 °C (-40 ~ 158 °F) | -40 ~ 70 °C (-40 ~ 158 °F) |
| | Operating Humidity | 95% @ 40 °C, non-condensing | 10 ~ 95% @ 40 °C non-condensing | 10 ~ 95% @ 40 °C non-condensing | 10 ~ 95% @ 40 °C non-condensing | 10 ~ 95% @ 40 °C non-condensing |
| | Non-operating Humidity | 95% @ 60 °C, non-condensing | 10 ~ 95% @ 60 °C non-condensing | 10 ~ 95% @ 60 °C non-condensing | 10 ~ 95% @ 60 °C non-condensing | 10 ~ 95% @ 60 °C non-condensing |
| Physical Characteristics | Dimensions (W x H x D) | 210 x 230 x 275 mm (8.3" x 9.1" x 10.8") | 192 x 376.7 x 338.5 mm (7.56" x 14.83" x 13.33") | 267.1 x 458 x 500 mm (10.52" x 18.03" x 19.69") | 438 x 43 x 381 mm (17.24" x 1.7" x 15") | 438 x 43 x 478 mm (17.24" x 1.7" x 18.82") |

✓: supported, -: not supported, △: optional

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O Modules

8

Industrial I/O and Video Solutions

Server Chassis



| Height (1U = 1.75") | | 1U | 2U | | 3U / Tower |
|---------------------------------------|---------------------------|--|--|--|--|
| Model Name | | HPC-7140 | HPC-7242 | HPC-7282 | HPC-7320 |
| Form Factor Support | | Micro ATX, ATX | Micro ATX, ATX | Micro ATX, ATX | Micro ATX, ATX, EATX |
| No. of slots / No. of full-size cards | | 1/0 | 3/3 | 7/0 | 7/6 |
| Drive Bay | Slim ODD Bay | 1 | 1 | 1 | 1 |
| | 5.25" (front-accessible) | - | - | - | - |
| | 3.5" (hot-swappable) | 4 | 4 (3.5" / 2.5") | 8 | 2 (3.5" / 2.5") |
| | 3.5" (internal) | - | - | 2 | 2 |
| | 2.5" (hot-swappable) | △ | 4 (3.5" / 2.5") | △ | 2 (3.5" / 2.5") |
| | 2.5" (internal) | - | 2 | - | - |
| Cooling | Chassis Fan | 4 (4cm / 24CFM) | 1 (8 cm/47CFM) + 2 (6 cm/28CFM) | 3 (8cm / 52.6 CFM) | 2 (8cm/141.9CFM) + 1 (6cm/27.72CFM) |
| | Air Filter | - | ✓ | - | ✓ |
| Front I/O Interface | USB 3.0 | - | 2 | - | 2 |
| | USB 2.0 | 2 | - | 2 | - |
| Miscellaneous | LED Indicators | System: Power, HDD, LAN1, LAN2, System Information HDD Tray: HDD Power and Activity LED | System: Power, HDD, LAN1, LAN2, temperature, fan HDD Tray: HDD Power and Activity LED | System: Power, HDD, LAN1, LAN2, System Information HDD Tray: HDD Power and Activity LED | System: Power, HDD, LAN1, LAN2 HDD Tray: HDD Power and Activity LED |
| | Rear Panel | - | Two reserved DB-9 ports | - | Two reserved DB-9 ports |
| Environment | Operating Temperature | 0 ~ 35 °C (32 ~ 95 °F) | 0 ~ 40 °C (32 ~ 104 °F) | 0 ~ 40 °C (32 ~ 104 °F) | 0 ~ 40 °C (32 ~ 104 °F) |
| | Non-Operating Temperature | -40 ~ 70 °C (-40 ~ 158 °F) | -40 ~ 70 °C (-40 ~ 158 °F) | -40 ~ 70 °C (-40 ~ 158 °F) | -40 ~ 70 °C (-40 ~ 158 °F) |
| | Operating Humidity | 10 ~ 85% @ 40 °C non-condensing | 10 ~ 85% @ 40 °C non-condensing | 10 ~ 85% @ 40 °C non-condensing | 10 ~ 85% @ 40 °C non-condensing |
| | Non-operating Humidity | 10 ~ 95% @ 60 °C non-condensing | 10 ~ 95% @ 60 °C non-condensing | 10 ~ 95% @ 60 °C non-condensing | 10 ~ 95% @ 60 °C non-condensing |
| Physical Characteristics | Dimensions (W x H x D) | 437 x 43.5 x 503 mm (17.2" x 1.7" x 19.85") | 426.4 x 88 x 525 mm (16.79" x 3.46" x 20.67") | 437 x 88.9 x 533.4 mm (17.2" x 3.5" x 21") | 426.4 x 132.2 x 480 mm (16.79" x 5.2" x 18.9") |

✓: supported, -: not supported, △: optional



| Height (1U = 1.75") | | 4U / Tower | | | |
|---------------------------------------|---------------------------|---|---|--|--|
| Model Name | | HPC-7000 | HPC-7400 | HPC-7442 | HPC-7483 |
| Form Factor Support | | Micro ATX, ATX, EATX | Micro ATX, ATX, EATX | Micro ATX, ATX, EATX | Micro ATX, ATX, EATX |
| No. of slots / No. of full-size cards | | 7/6 | 12/12 | 7/7 | 10/10 |
| Drive Bay | Slim ODD Bay | 1 | - | 1 | - |
| | 5.25" (front-accessible) | - | 2 | - | 3 |
| | 3.5" (hot-swappable) | - | - | 4 can upgrade to 8 (3.5" / 2.5") | 8 |
| | 3.5" (internal) | 3 (External) | 2 rear-accessible (3.5" / 2.5") | 1 | - |
| | 2.5" (hot-swappable) | - | - | 4 can upgrade to 8 (3.5" / 2.5") | - |
| | 2.5" (internal) | - | 2 rear-accessible (3.5" / 2.5") | - | 2 |
| Cooling | Chassis Fan | 2 (12cm/150CFM) | 3 (8cm/141.9CFM) | 1 (12 cm /114 CFM) + 1 (8 cm/55 CFM) | 3 (12 cm /226.5 CFM) |
| | Air Filter | - | ✓ | ✓ | - |
| Front I/O Interface | USB 3.0 | 2 | 2 | 2 | 2 |
| | USB 2.0 | - | - | - | - |
| Miscellaneous | LED Indicators | System: Power | System: Power, HDD, LAN1, LAN2 | System: Power, HDD, LAN1, LAN2, temperature, fan HDD Tray: HDD Power and Activity LED | System: Power, HDD, LAN1, LAN2, System information HDD Tray: HDD Power and Activity LED |
| | Rear Panel | - | - | Five DB-9 ports and one 68-pin SCSI openings | Two DB-9 ports and two PS2 and two USB |
| Environment | Operating Temperature | 0 ~ 40 °C (32 ~ 104 °F) | 0 ~ 40 °C (32 ~ 104 °F) | 0 ~ 40 °C (32 ~ 104 °F) | 0 ~ 40 °C (32 ~ 104 °F) |
| | Non-Operating Temperature | -40 ~ 70 °C (-40 ~ 158 °F) | -40 ~ 70 °C (-40 ~ 158 °F) | -40 ~ 70 °C (-40 ~ 158 °F) | -40 ~ 70 °C (-40 ~ 158 °F) |
| | Operating Humidity | 10 ~ 95% @ 60 °C non-condensing | 10 ~ 85% @ 40 °C non-condensing | 10 ~ 85% @ 40 °C non-condensing | 10 ~ 85% @ 40 °C non-condensing |
| | Non-operating Humidity | 10 ~ 95% @ 60 °C non-condensing | 10 ~ 95% @ 60 °C non-condensing | 10 ~ 95% @ 60 °C non-condensing | 10 ~ 95% @ 60 °C non-condensing |
| Physical Characteristics | Dimensions (W x H x D) | 267 x 458 x 500 mm (10.52" x 18.03" x 19.69") | 426 x 177 x 448 mm (16.7" x 7.0" x 17.6") | 426 x 177 x 600 mm (16.7" x 7.0" x 23.6") | 435 x 177 x 658 mm (17.13" x 7.0" x 25.5") |

✓: supported, -: not supported, △: optional

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O Modules

8

Industrial I/O and Video Solutions

Server Chassis



| Height (1U = 1.75") | | 1U | 2U | | 3U | 4U |
|---------------------------------------|---------------------------|---|---|---|---|---|
| Model Name | | HPC-8104 | HPC-8212 | HPC-8224 | HPC-8316 | HPC-8424 |
| Form Factor Support | | Mico ATX, ATX | Mico ATX, ATX, EATX | Mico ATX, ATX, EATX | Mico ATX, ATX, EATX | Mico ATX, ATX, EATX |
| No. of slots / No. of full-size cards | | 1/0 | 7/0 | 7/0 | 7/6 | 7/6 |
| Drive Bay | ODD Bay | 1 x Ultra Slim ODD Bay | - | - | - | - |
| | 3.5" (hot-swappable) | 4 x SAS3 or SATA | 12 x SAS3/SATA | - | - | - |
| | 3.5" (internal) | - | - | - | 16 x SAS3 or SATA | 24 x SAS3/SATA |
| | 2.5" (hot-swappable) | - | - | 24 x SAS3/SATA +*2 (Rear) | 2 (Rear) | 2 (Rear) |
| | 2.5" (internal) | 2 or 3 (△) | - | - | - | - |
| | Expander | - | ✓ (12) | ✓ (24) | ✓ (16 for SAS, 12 for SATA) | ✓ (24) |
| | NVMe Support | - | ✓ (4) | ✓ (4) | - | ✓ (4) |
| Cooling | Chassis Fan | 5 (4cm) | 4 (8cm) | 4 (8cm) | 4 (8cm) | 4(8cm) |
| | Air Filter | - | - | - | - | - |
| Front I/O Interface | USB 3.0 | 2 | - | - | 2 | - |
| | USB 2.0 | - | 2 | 2 | - | 2 |
| Power Supply | Single Power Supply | 350W, 500W | - | - | 500W (TA SKU) | - |
| | Redundant Power Supply | - | 550W, 650W, 800W | 550W, 800W | 550W, 800W | 550W, 800W |
| Environment | Operating Temperature | 0 ~ 35 °C (32 ~ 95 °F) | 0 ~ 35 °C (32 ~ 95 °F) | 0 ~ 35 °C (32 ~ 95 °F) | 0 ~ 35 °C (32 ~ 95 °F) | 0 ~ 35 °C (32 ~ 95 °F) |
| | Non-Operating Temperature | -40 ~ 70 °C (-40 ~ 158 °F) | -40 ~ 70 °C (-40 ~ 158 °F) | -40 ~ 70 °C (-40 ~ 158 °F) | -40 ~ 70 °C (-40 ~ 158 °F) | -40 ~ 70 °C (-40 ~ 158 °F) |
| | Operating Humidity | 10 ~ 95% @ 40 °C non-condensing | 10 ~ 95% @ 40 °C non-condensing | 10 ~ 95% @ 40 °C non-condensing | 10 ~ 95% @ 40 °C non-condensing | 10 ~ 95% @ 40 °C non-condensing |
| | Non-operating Humidity | 10 ~ 95% @ 60 °C non-condensing | 10 ~ 95% @ 60 °C non-condensing | 10 ~ 95% @ 60 °C non-condensing | 10 ~ 95% @ 60 °C non-condensing | 10 ~ 95% @ 60 °C non-condensing |
| Physical Characteristics | Dimensions (W x H x D) | 438 x 43.9 x 530mm (17.24" x 1.73" x 20.9") | 438 x 88.4 x 540 mm (17.24" x 3.48" x 21.26") / 438 x 88.4 x 620 mm (17.24" x 3.48" x 24.41") | 438 x 88.4 x 540 mm (17.24" x 3.48" x 21.26") / 438 x 88.4 x 620 mm (17.24" x 3.48" x 24.41") | 435 x 132 x 540 mm (17.13 x 5.2 x 21.26") / 435 x 132 x 620 mm (17.13 x 5.2 x 24.41") | 438 x 176 x 540 mm (17.24" x 6.93" x 21.26") / 438 x 176 x 620 mm (17.24" x 6.93" x 24.41") |
| | | | | | | |

* R6A1E SKU support additional rear 2 Hot-swap 2.5"

✓: supported, -: not supported, △: optional

3

Intelligent System

3-2 Slot SBC & Passive Backplanes

3-14 Industrial Motherboards

3-17 Industrial Chassis

3-21 CompactPCI Platforms

3-23 Industrial Computer Peripherals



Full Range of Industrial Computers and Integration Services for Automation Applications

Overview

Advantech delivers a full range of industrial computers for versatile applications in the automation field. Offering sophisticated system integration services, from customization, integration, validation, and certification, we provide a one-stop solution for rugged systems to customers who require a trusted partner to maximize their solutions.


PICMG Single Board Computers

Advantech's slot CPU cards deliver a variety of solutions for industrial and embedded applications. Offering a complete selection of standard PICMG 1.0/1.3 full-size, as well as half-size SBCs, these scalable product lines have flexible I/O and great expandability, from ISA and PCI, to PCI Express. Industrial, slot-hungry demands can be easily accommodated with Advantech's full range of backplanes, chassis, and peripheral support.



Passive Backplanes

A wide range of Advantech backplanes are available for PICMG 1.0/1.3 SBCs. They range from two to twenty slots and allow optimal system configurations with flexible combinations of ISA, 32-bit / 64-bit PCI and PCIe slots. Our strict design policy makes it easy for customers to create solutions that ensure system compatibility. Advantech also provides a low-cost, yet professional design service that tailors backplanes to meet expansion requirements within a short time frame.



Industrial Motherboards

Advantech provides a complete range of industrial motherboards in various form factors, from performance-rich ATX to best price/performance MicroATX and ultra compact highly integrated Mini-ITX. These motherboards are highly integrated and deliver advanced features like multi-core processing and PCI Express technology. They are suited for demanding industrial applications that require seamless upgrades, long term support, proven reliability and strict revision control.



Industrial Computer Chassis

Advantech offers a complete selection of industrial computer chassis from 1U to 6U rackmount, to wall-mountable solutions, designed to support a variety of industrial-grade motherboard/single board computer (SBC) form factors, such as ATX, MicroATX, PICMG 1.0/1.3, and full-size/half-size SBC. Chassis include a range of features such as redundant power supply, hot swappable accessories, storage, and cooling options. High-end models with built in intelligent system modules enable system health self diagnosis, smart fan control, and remote management with WISE-PaaS/RMM or SNMP sub agent.



CompactPCI Platforms

Advantech offers industrial CompactPCI solutions which feature front-end access, high shock and vibration tolerance characteristics, automatic cooling system, fault resilience, and hot swap capabilities. These features make our CompactPCI series the most reliable PC-based computing platform for mission-critical applications.



Industrial Computer Peripherals

Advantech IPC peripherals can integrate with various modules including IPMI, TPM, power supplies and versatile rackmount/wallmount peripherals. They can help system integrators build easy-to-operate computer systems.



Applications



Automated Optical Inspection (AOI)

Automated optical inspection provides high speed production and helps manufacturers improve efficiency. Advantech AIIS series with compatible Basler and Pointgrey cameras, multiple PoE, USB3, and rich I/O Interface ensures product quality and safety.



Factory Automation

Factory automation counts on immediate information monitoring to achieve just-in-time manufacture. Advantech WebAccess, a 100% web-based SCADA software with excellent networking capabilities, provides powerful remote monitoring and control functions. Through WebAccess web structure, users can develop a central database from project node to SCADA node via Internet or Intranet.



Machine Diagnostic

The graphical control interface makes it easy to monitor machine status in real time, and develop an effective, dynamic, preventive maintenance solution that ensures increased equipment reliability and stable overall operation.



Automatic Test Equipment & Data Acquisition (DAQ)

Quality control systems have become very expensive in recent years, creating a demand for more cost-effective alternatives. Along with automatic testing and inspection systems, Advantech's products help reduce human error and accelerate time to market.

Start your Business with an IPC Expert



Tool-less thumb screws



Lockable door, flexible with-or-without key



Front-accessible fan without opening top cover



Small footprint chassis design for better work field layout arrangement

PICMG 1.3 System Host Boards



| Model Name | | LGA1150 PICMG 1.3 SHB | LGA1151 PICMG 1.3 SHB | LGA1151 PICMG 1.3 SHB |
|------------------|--|--|---|--|
| | | PCE-5128 | PCE-5029 | PCE-5129 |
| Processor System | CPU | Intel® Core™ i7/Core™ i5/Core™ i3 LGA1150 Processors | Intel® Core™ i7/Core™ i5/Core™ i3 LGA1151 Processors | Intel® Core™ i7/Core™ i5/Core™ i3 LGA1151 Processors |
| | Max. Speed | 3.1 GHz | 3.4 GHz | 3.4 GHz |
| | Cache | Up to 8 MB (Depends on CPU) | Up to 8 MB (Depends on CPU) | Up to 8 MB (Depends on CPU) |
| | Chipset | Intel® Q87 | Intel® H110 | Intel Q170 |
| | BIOS | AMI 128 Mbit SPI Flash | AMI 128 Mbit SPI Flash | AMI 128 Mbit SPI Flash |
| Backplane Bus | PCIe | PICMG1.3: One x16 & Four x1 | PICMG1.3: One x16 & Four x1 | PICMG1.3: One x16 & Four x1 |
| | PCI (32bit/33 MHz) | 4 | 4 | 4 |
| Memory | Technology | Dual-channel (Non-ECC) DDR3 1333/1600 | Dual-channels (Non-ECC) DDR4 1866/2133 | Dual-channels (Non-ECC) DDR4 1866/2133 |
| | Max. Capacity | 16 GB | 32 GB | 32 GB |
| | Socket | 240-pin DIMM x 2 | 2 x 288-pin DIMM | 2 x 288-pin DIMM |
| Graphics | Controller | Chipset integrated Intel® HD Graphics | Chipset integrated Intel® HD Graphics | Chipset integrated Intel® HD Graphics |
| | VRAM | Shared system memory is subject to OS | Shared system memory is subject to OS | Shared system memory is subject to OS |
| | Video Out | VGA/DVI-D/DVI-D (Optional DVI-D cable) | G2: VGA+DP/DVI (Optional DVI-D/DP cable) VG: VGA | VGA+DP/DVI-D+DP/DVI-D |
| Ethernet | Interface | 10/100/1000 Mbps | 10/100/1000 Mbps | 10/100/1000 Mbps |
| | LAN1/LAN2 Controller | Intel® I217LM/I211AT | LAN1: I219-V LAN2: I211-AT (G2 only) | Intel I219LM/I211 |
| | Connector | RJ45 X 2 | G2: 2 VG: 1 | RJ45 x 2 |
| | Disable in BIOS | ✓ | ✓ | ✓ |
| SATA | Max. Data Transfer Rate | 600 MB/s SATA3.0 | 600 MB/s SATA3.0 | 600 MB/s SATA3.0 |
| | Channel | 6 x SATA3.0 | 4 x SATA3.0 | 5 x SATA3.0 |
| | S/W Raid | 0, 1, 5, 10 | - | 0, 1, 5, 10 |
| Rear I/O | VGA | 1 | 1 | 1 |
| | Ethernet | 2 | G2: 2 VG: 1 | 2 |
| | USB2.0 | 0 | - | 0 |
| | USB3.0 | 1 | G2: 1 VG: - | 1 |
| | PS/2 | 1 | 1 | 1 |
| | Serial | - | G2: - VG: 1 | - |
| Internal I/O | USB 2.0 | 9 USB 2.0 (Pin-Header x 4 + USB Type A x 1 + 4 on backplane) | 7 USB 2.0 (Pin-header x 2+USB Type A x 1+ 4 on backplane) | 7 USB2.0 (Pin-header x 2+USB Type A x 1+ 4 on backplane) |
| | USB 3.0 | 2 USB3.0 (Pin-Header) | 2 USB3.0 (Pin header) | 4 USB3.0 (Pin header) |
| | SATA | 6 | 4 | 5 |
| | M.2 (2280 Type M) | - | - | 1 (Shared w/ SATA0 port) |
| | Serial | 2 RS-232 (Pin-Header) | G2: 2 VG: 1 | 2 RS-232 (Pin-Header) |
| | Parallel | 1(SPP/EPP/ECP) | 1 | 1 |
| | PS/2 | 1 | 1 | 1 |
| Watchdog Timer | OBS(Onboard Security Hardware Monitor) | ✓ | ✓ | ✓ |
| | Output | System reset | System reset | System reset |
| Miscellaneous | Interval | Programmable, 1~255 sec/min | Programmable, 1~255 sec | Programmable, 1~255 sec/min |
| | Advantech Audio Module | PCA-AUDIO-HDA1E | PCA-AUDIO-HDB1E | PCA-AUDIO-HDB1E |
| | Advantech SNMP-1000 | ✓ | - | ✓ |
| | Advantech SAB-2000 | ✓ | G2: ✓ VG: - | ✓ |
| | Advantech IPMI Module | - | - | - |
| | AMT | ✓ | - | ✓ |

✓: supported, -: not supported, △: optional



| LGA1150 PICMG 1.3 SHB | LGA1151 PICMG 1.3 SHB | LGA2011 PICMG 1.3 SHB |
|--|---|--|
| PCE-7128 | PCE-7129 | PCE-9228 |
| Intel® Xeon® and Core™ i7/Core™ i5/Core™ i3 LGA1150 Processors | Intel® Xeon and Core™ i7/Core™ i5/Core™ i3 LGA1151 Processors | Intel Xeon E5-2600 v3 series LGA2011 Processors |
| 3.5 GHz | 3.6 GHz | 2.5 GHz |
| Up to 8 MB (Depends on CPU) | Up to 8 MB (Depends on CPU) | Up to 30 MB (Depends on CPU) |
| Intel® C226 | Intel C236 | Intel C612 |
| AMI 128 Mbit SPI Flash | AMI 128 Mbit SPI Flash | AMI 128 Mbit SPI Flash |
| One x16/ Two x8 & Four x1 | PICMG1.3: One x16 / Two x8 & Four x1 | PICMG1.3: One x16/ Two x8 & Four x1 Expansion (ODM optional): 64 lanes |
| 4 | 4 | 4 |
| Dual-channel (ECC) DDR3 1333/1600 | Dual-channels (ECC) DDR4 1600/1866/2133 | Quard-channels ECC-Register DDR4 1600/1866/2133 |
| 16 GB | 32 GB | 256 GB |
| 240-pins DIMM x 2 | 2 x 288-pins DIMM | 288-pins DIMM x 8 |
| Chipset integrated Intel® HD Graphics | Chipset integrated Intel® HD Graphics | AST1400/AST2400 |
| Shared system memory is subject to OS | Shared system memory is subject to OS | DDR3 64MB |
| VGA/DVI-D/DVI-D (Optional DVI-D cable) | VGA+DP/DVI-D+DP/DVI-D | VGA |
| 10/100/1000 Mbps | 10/100/1000 Mbps | 10/100/1000 Mbps |
| Intel® I217LM/I210AT | Intel I219LM/I210AT | Intel I210AT/I210AT |
| RJ45 x 2 | RJ45 x 2 | RJ45 x 2 |
| ✓ | ✓ | Lan1: -; Lan2: ✓ |
| 600 MB/s SATA3.0 | 600 MB/s SATA3.0 | 600 MB/s SATA3.0 |
| 6 x SATA3.0 | 5 x SATA3.0 | 8 x SATA3.0 |
| 0, 1, 5, 10 | 0, 1, 5, 10 | 0, 1, 5, 10 |
| 1 | 1 | 1 |
| 2 | 2 | 3(IPMI occupy 1 LAN) |
| 0 | 0 | 2 |
| 1 | 1 | 2 |
| 1 | 1 | 1 |
| - | - | - |
| 9 USB 2.0 (Pin-Header x 4 + USB Type A x 1 + 4 on backplane) | 7 USB2.0 (Pin-header x 2+USB Type A x 1+ 4 on backplane) | 4 USB 2.0 (On backplane) |
| 2 USB3.0 (Pin-Header) | 4 USB3.0 (Pin header) | 2 USB3.0 (Pin-Header) |
| 6 | 5 | 8 |
| - | 1 (Shared w/ SATA0 port) | - |
| 2 RS-232(Pin-Header) | 2 RS-232(Pin-Header) | 1 RS-232(Pin-Header) |
| 1(SPP/EPP/ECP) | 1 | - |
| 1 | 1 | - |
| ✓ | ✓ | ✓ |
| System reset | System reset | System reset |
| Programable, 1~255 sec/min | Programable, 1~255 sec/min | Programable, 1~255 sec/min |
| PCA-AUDIO-HDA1E | PCA-AUDIO-HDB1E | PCA-AUDIO-HDA1E |
| ✓ | ✓ | ✓ |
| ✓ | ✓ | ✓ |
| ✓ | - | ✓ |
| ✓ | ✓ | - |

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O Modules

8

Industrial I/O and Video Solutions

PICMG 1.0 Single Board Computers



| Model Name | | Core™ 2 Quad PICMG 1.0 SBC | LGA1150 PICMG 1.0 SBC |
|------------------|-------------------------|--|--|
| | | PCA-6011 | PCA-6028 |
| Processor System | CPU | Intel® Core™ 2 Quad/Core™ 2 Duo/ Pentium dual-Core™/Celeron LGA775 processors | Intel Core i7/i5/i3/Pentium LGA 1150 Processors |
| | Max. Speed | 3.16 GHz | 3.2GHz |
| | Max. L2 Cache | Up to 12 MB (Depend on CPU) | Up to 8MB |
| | Chipset | Intel® G41 + ICH7 (VG version only) Intel® G41 + ICH7R (G2 version only) | Intel H81 |
| | BIOS | AMI 16 Mb SPI Flash | AMI 128Mbit SPI Flash |
| | FSB | 1333/1066/800 MHz | - |
| Bus | PCI | 32-bit/33 MHz PCI | 32 bit/33 MHz PCI |
| | ISA | HISA (ISA High Drive) | HISA (ISA High Driver) |
| Graphics | Controller | Chipset integrated Intel® Graphics Media Accelerator X4500 | Chipset integrated Intel HD Graphics |
| | VRAM | Shared with system memory up to 352 MB | Shared system memory is subject to OS |
| | LCD/DVI | DVI (Optional) | DVI (G2 version only) |
| Ethernet | Interface | 10/100/1000 Mbps | 10/100/1000 Mbps |
| | Controller | LAN1: Intel® 82583V LAN2: Intel® 82583V | LAN 1: Intel I217V LAN 2: Intel I211 (Only in G2 Sku) |
| | Connector | RJ-45 x 2 | RJ45 x 1 (VG sku); RJ45 x 2 (G2 sku) |
| | Disabled in BIOS | ✓ | ✓ |
| Memory | Technology | Dual-channel DDR3 1066/800 MHz | Dual channel (Non-ECC) DDR3 1333/1600 MHz |
| | Max. Capacity | 8 GB | 16 GB (8 GB per DIMM) |
| | Socket | 240-pin DIMM x 2 | DDR3 240-pin DIMM x 2 |
| SATA | Max. Data Transfer Rate | 300 MB/s | 600 MB/s |
| | Channel | 4 | 4 (1x SATA2.0, 2x SATA3.0, 1x mSATA) |
| EIDE | RAID | 0, 1, 5, 10 (G2 version only) | - |
| | Mode | ATA 100/66/33 | - |
| | Channel | 1 (Max. two devices) | - |
| I/O Interface | USB | 8 (USB 2.0, for VG version) 7 (USB 2.0, for G2 version) | Up to 8 x USB2.0 (6x pin header, 1x type A, 1x rear in G2 sku only) 2x USB3.0 (Pin header) |
| | Serial | 2 (RS-232) | 2 RS-232 (Pin-Header) |
| | Parallel | 1 (SPP/EPP/ECP) | 1 |
| | FDD | 1 | - |
| | PS/2 | 1 | 1 |
| | LAN | 1 (for VG version) 2 (for G2 version) | 1 (for VG version) 2 (for G2 version) |
| | OBS (Hardware Monitor) | ✓ | ✓ |
| Watchdog Timer | Output | System reset | System reset |
| | Interval | Programmable, 1~255 sec | Programmable, 1~255 sec |
| Miscellaneous | Audio | PCA-AUDIO-HDA1E | PCA-AUDIO-HDA1E |
| | Advantech SNMP-1000-B | ✓ | ✓ |
| | Advantech SAB-2000 | ✓ | ✓ |
| | Solid State Disk | (Optional) | mSATA |

✓: supported, -: not supported, △: optional

Half-Size Single Board Computers



| Specifications | | PCle Half-Size SBC | |
|------------------|---|---|--|
| | | PCE-3028 | PCE-4128 |
| Processor System | CPU | Intel Core i7/i5/i3/Pentium LGA 1150 Processor | Intel Xeon E3 1200v3 series, Core i7/i5/i3 LGA1150 processors |
| | Speed | Up to 3.5 GHz | up to 3.5GHz |
| | L2 Cache | Up to 8MB | up to 8MB |
| | Chipset | Intel H81 | Intel C226 |
| | BIOS | AMI 128 Mbit SPI Flash | AMI 128Mbit SPI Flash |
| | FSB | - | - |
| Bus | PCle | One PClex16, Four PClex1 | One PCIe x16/Two PCIe x8, Four PCIe x1 |
| | PCI | - | - |
| | ISA | - | - |
| Graphics | Controller | Chipset integrated graphics with Intel HD | GT2 P4600/GT2 4600/GT1 HD graphics |
| | VRAM | Shared with system memory is subject to OS | Shared system memory is subject to OS |
| | Video output | D-sub VGA port, DVI | VGA, DP, CRT |
| Ethernet | Interface | 10/100/1000 Mbps | 10/100/1000 Mbps |
| | Controller | LAN1: Intel® I217V LAN2: Intel® I211AT | LAN1: Intel I217LM, LAN2: I210AT |
| | Connector | RJ-45 x2 | RJ-45 x2 |
| | Disabled in BIOS | ✓ | - |
| Memory | Technology | Dual-channel DDR3 1066/1333/1600 MHz | Dual channel DDR3 ECC 1066/1333/1600 MHz(ECC function enable depends on processor support) |
| | Max. Capacity | 16 GB | 16 GB |
| | Socket | 204-pin SODIMM x2 | DDR3 204-pin SO-DIMM x2 |
| SATA | Max. Data Transfer Rate | 600 MB/s, 300 MB/s | 600 MB/sec |
| | Channel | 4 | 4 |
| | RAID | - | 0, 1, 5, 10 |
| EIDE | Mode | - | - |
| | Channel | - | - |
| I/O Interface | USB | 2 USB 3.0 + 7 USB 2.0 | 3 USB 3.0, 7 USB 2.0 |
| | Serial | 2 x RS-232 Optional: 4x RS-422/485 w/Auto-flow or 4 x RS-232 by COM module | 2 x RS-232, Optional: RS-422/485 x4 or RS-232 x4 via module. |
| | Parallel | 1 | 1 |
| | FDD | - | 0 |
| | PS/2 | 1 | 1 |
| | LAN | 2 | 2 |
| | OBS (Onboard Security Hardware Monitor) | - | - |
| Watchdog Timer | Output | System reset | System reset |
| | Interval | Programmable 1-255 sec | Programmable 1-255 sec |
| | Audio | PCA-AUDIO-HDA1E | PCA-AUDIO-HDA1E |
| Miscellaneous | Advantech SNMP-1000 | - | - |
| | IPMI | - | - |
| | Solid State Disk | - | - |

✓: supported, -: not supported, △: optional

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O Modules

8

Industrial I/O and Video Solutions

Half-Size Single Board Computers



| Specifications | | PCIe Half-Size SBC | | PCI Half-Size SBC |
|------------------|---|---|--|--|
| | | PCE-3029 | PCE-4129 | PCI-7032 |
| Processor System | CPU | Intel Core i7/i5/i3/Pentium LGA 1151 Processor | Intel Xeon E3-1200v5 series, Core i7/i5/i3 LGA1151 processors | Intel Celeron J1900/N2930 |
| | Speed | Up to 3.7 GHz | Up to 3.7 GHz | 2.00/1.83 GHz |
| | L2 Cache | Up to 8 MB | Up to 8 MB | 2MB/2MB |
| | Chipset | Intel H110 | Intel C236 | Intel Celeron J1900/N2930 SOC |
| | BIOS | AMI 128 Mbit SPI Flash | AMI 128 Mbit SPI Flash | AMI 64 Mbit SPI Flash |
| Bus | FSB | - | - | - |
| | PCIe | One PCIe x16, Four PCIe x1 | One PCIe x16 or Two PCIe x8, Four PCIe x1 | One PCIe x 1 (F SKU) Only |
| | PCI | - | - | 32-bit/33 MHz PCI |
| Graphics | ISA | - | - | - |
| | Controller | Chipset integrated graphics with Intel HD | Chipset integrated graphics with Intel HD | Chipset integrated graphics with Intel® HD |
| | VRAM | Shared with system memory is subject to OS | Shared with system memory is subject to OS | Shared with system memory is subject to OS |
| Ethernet | Video output | VGA, DVI, DP | VGA, DVI, DP | D-sub VGA port, 48-bit LVDS, DVI |
| | Interface | 10/100/1000 Mbps | 10/100/1000 Mbps | 10/100/1000 Mbps |
| | Controller | LAN1: Intel® I219V LAN2: Intel® I211AT | LAN1: Intel® I219LM LAN2: Intel® I210AT | LAN1: Intel® I211 LAN2: Intel® I211 |
| | Connector | RJ-45 x2 | RJ-45 x2 | RJ-45 x 2 |
| Memory | Disabled in BIOS | ✓ | ✓ | ✓ |
| | Technology | Dual-channel DDR4 1866/2133 MHz | Dual channel DDR4 ECC 1866/2133 MHz (ECC function enable depends on processor support) | Dual-Chnnel DDR3L 1333 |
| | Max. Capacity | 32 GB | 32GB | 8GB (for G2/F SKU) 4GB (for VG SKU) |
| SATA | Socket | 260-pin SODIMM x2 | 260-pin SO-DIMM X2 | 204-pin SODIMM x 2 (for G2/F SKU) 204-pin SODIMM x 1 (for VG SKU) |
| | Max. Data Transfer Rate | 600MB/s | 600MB/s | 300 MB/s |
| | Channel | 4 | 4 | 2 (SATA 2 can change mSATA) |
| EIDE | RAID | - | 0,1,5,10 | - |
| | Mode | - | - | - |
| | Channel | - | - | - |
| I/O Interface | USB | 3 USB 3.0 + 7 USB 2.0 | 3 USB 3.0 + 7 USB 2.0 | 1 USB 3.0 + 6 USB 2.0 (for G2/F SKU) 1 USB 3.0 + 5 USB 2.0 (for VG SKU) |
| | Serial | 2 x RS-232 Optional: 4x RS-422/485 w/Auto-flow or 4 x RS-232 by COM module | 2 x RS-232 Optional: 4x RS-422/485 w/auto-flow or 4 x RS232 by COM module | 4 x RS-232/422/485 (for G2/F SKU) 2 x RS-232/422/485 (for VG SKU) Optional: 4 x RS-422/485 w/Auto-flow or 4 RS-232 by COM module |
| | Parallel | 1 | 1 | 1 |
| | FDD | - | - | - |
| | PS/2 | 1 | 1 | 1 |
| | LAN | 2 | 2 | 2 (for G2/F SKU) 1 (for VG SKU) |
| | OBS (Onboard Security Hardware Monitor) | ✓ | ✓ | ✓ (G2 SKU only) |
| | Watchdog Timer | System reset | System reset | System reset |
| Miscellaneous | Interval | Programmable 1-255 sec | Programmable 1-255 sec | Programmable, 1~255 sec/min |
| | Audio | PCA-AUDIO-HDB1E | PCA-AUDIO-HDA1E | PCA-AUDIO-HDB1E |
| | Advantech SNMP-1000 | - | - | - |
| | IPMI | - | - | - |
| Solid State Disk | Solid State Disk | mSATA x 1 | mSATA x 1 | mSATA x 1 |

✓: supported, -: not supported, △: optional



| ISA Half-Size SBC | | |
|---|--|--|
| PCA-6763 | PCA-6742 | PCA-6743 |
| AMD G-Series APU T16R/T40E | Advantech EVA-X4300 | DM&P Vortex86DX |
| 615 MHz/1GHz | 300 MHz | 800 MHz |
| 512 KB | L1 Cache 32 KB | 256 KB |
| AMD A55E | Advantech EVA-X4300 | DM&P Vortex86DX |
| AMI 32 Mbit SPI Flash | Award integrated 256 KB ROM in EVA-X4300 | Award integrated 256 KB ROM in Vortex86DX |
| - | - | - |
| - | - | - |
| 16-bit ISA Bus | 8/16-bit 8 MHz ISA | 16-bit ISA Bus |
| Radeon HD 6250 | SMI 712 graphic controller | SMI 712 graphic controller |
| Shared with system memory up to 384MB | 4 MB display memory | 4 MB display memory |
| D-sub VGA port, LVDS (48-bit for G2 SKU, 18-bit for VG SKU), DVI 10/100/1000 Mbps | D-Sub VGA port, 18/24 bit TTL or 18/24 bit LVDS (optional) 10/100 Mbps | D-Sub VGA port, up to 24 bit TTL or 18 bit LVDS (optional) 10/100 Mbps |
| LAN1: Realtek RTL8111E-VL-CG LAN2: Realtek RTL8111E-VL-CG | Realtek RTL8100CL | LAN on Vortex86DX |
| RJ-45 x 2 | RJ-45 x 1 | RJ-45 x 1 |
| ✓ | ✓ | ✓ |
| Onboard 1GB DDR3 1066 MHz SODIMM DDR3 1066 MHz up to 4GB | Default onboard DDR 2 166MHz | Default onboard DDR2 (for VE SKU) Default onboard DDR2 (for F SKU) |
| 5GB | 128 MB | 256 MB (for VE SKU) 512 MB (for F SKU) |
| 204-pin SODIMM x 1 | - | - |
| 300 MB/s | - | 150 MB/s |
| 4 | - | 1 (for F SKU) |
| - | - | - |
| - | UDMA 100 | UDMA 100 |
| - | 1 (Max. 2 devices) | 1 (Max. 2 devices) |
| 7 USB 2.0 (for G2 SKU) 6 USB 2.0 (for VG SKU) | 4 USB 2.0 | 4 USB 2.0 |
| 2 x RS-232 Optional: 4 x RS-422/485 w/Auto-flow by COM module | 1 x RS-232/422/485 3 x RS-232 | F SKU: 2 x RS-232/422/485 & 2 x RS-232 VE SKU: 2 x RS-232 |
| 1 | 1 | 1 |
| 1 | - | 1 |
| 1 | 1 | 1 |
| 2 (for G2/F SKU) 1 (for VG SKU) | 1 (VE) | 1 |
| - | - | - |
| System reset | System reset/IRQ11 | System reset/IRQ11 |
| Programmable, 1~255 sec/min | Programmable, 1~255 sec/min | Programmable, 1~255 sec/min |
| PCA-AUDIO-HDA1E | - | - |
| - | - | - |
| - | - | - |
| mSATA x 1 | CompactFlash Type I/II | CompactFlash Type I/II |

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O Modules

8

Industrial I/O and Video Solutions

PICMG1.3 Full-Size SHB Backplanes

Server Grade: Compatible with PCE-7000 Series CPU Boards

| Category | Model Name | PCIe | | | | PCI-X | | | | PCI |
|-----------------|-----------------|------|------|----|----|-------|--------|--------|-------|-----|
| | | x16 | x8 | x4 | x1 | 64/66 | 64/100 | 64/133 | 32/33 | |
| 2U Butterfly BP | PCE-7B06V-04A1E | - | 1 | - | - | - | - | - | - | 4 |
| 8 slots BP | PCE-7B08-04A1E | - | 2 | 1 | - | - | - | - | - | 4 |
| 14 slots BP | PCE-7B09R-04A1E | - | 1 | 3 | - | - | - | - | - | 4 |
| | PCE-7B10-04A1E | - | - | 5 | - | - | - | - | - | 4 |
| | PCE-7B13-64C1E | - | 2 | - | - | 4 | 2 | - | - | 4 |
| | PCE-7B13-07A1E | - | 2 | 3 | - | - | - | - | - | 7 |
| | PCE-7B13D-04A1E | - | 1, 2 | - | - | - | - | - | - | 4 |
| 20 slots BP | PCE-7B17-00A1E | - | 5 | 11 | - | - | - | - | - | - |

| Category | Model Name | Wallmount/Desktop Chassis | | | |
|-----------------|-----------------|---------------------------|----------|-------------|----------|
| | | IPC-6025 | IPC-6606 | IPC-6806(W) | IPC-6608 |
| 2U Butterfly BP | PCE-7B06V-04A1E | - | - | - | - |
| 8 slots BP | PCE-7B08-04A1E | - | - | - | ✓ |
| 14 slots BP | PCE-7B09R-04A1E | - | - | - | - |
| | PCE-7B10-04A1E | - | - | - | - |
| | PCE-7B13-64C1E | - | - | - | - |
| | PCE-7B13-07A1E | - | - | - | - |
| | PCE-7B13D-04A1E | - | - | - | - |
| 20 slots BP | PCE-7B17-00A1E | - | - | - | - |

| Category | Model Name | Rackmount Chassis | | | | | | | | | | | | | |
|-----------------|-----------------|-------------------|----------|-------------|------------|--------------|---------|---------|----------|----------|----------|----------|----------|--------------|--------------|
| | | ACP-1010 | ACP-1320 | ACP-2000EBP | IPC-602EBP | IPC-510 | IPC-610 | IPC-611 | ACP-4000 | ACP-4010 | ACP-4320 | ACP-4340 | ACP-4360 | IPC-623 | IPC-622 |
| | | 2-slot / 1U | | 6-slot / 2U | | 15-slot / 4U | | | | | | | | 20-slot / 4U | 20-slot / 6U |
| 2U Butterfly BP | PCE-7B06V-04A1E | - | - | ✓ | ✓ | - | - | - | - | - | - | - | - | - | - |
| 8 slots BP | PCE-7B08-04A1E | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| 14 slots BP | PCE-7B09R-04A1E | - | - | - | - | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | - | - |
| | PCE-7B10-04A1E | - | - | - | - | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | - | - |
| | PCE-7B13-64C1E | - | - | - | - | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | - | - |
| | PCE-7B13-07A1E | - | - | - | - | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | - | - |
| | PCE-7B13D-04A1E | - | - | - | - | - | - | - | - | ✓ | - | - | - | - | - |
| 20 slots BP | PCE-7B17-00A1E | - | - | - | - | - | - | - | - | - | - | - | - | ✓ | ✓ |

Desktop: Compatible with PCE-5000 Series CPU Boards

| Category | Model Name | PCIe | | | | PCI-X | | | | PCI |
|-----------------|-----------------|------|----|----|----|-------|--------|--------|-------|-----|
| | | x16 | x8 | x4 | x1 | 64/66 | 64/100 | 64/133 | 32/33 | |
| 1U Butterfly BP | PCE-5B03V-01A1E | 1 | - | - | - | - | - | - | - | 1 |
| | PCE-5B03V-00A1E | 1 | - | 1 | - | - | - | - | - | - |
| 2U Butterfly BP | PCE-5B05V-30B1E | 1 | - | - | - | - | 2 | 1 | - | - |
| | PCE-5B06V-00A1E | 1 | - | - | 4 | - | - | - | - | - |
| | PCE-5B06V-04A1E | 1 | - | - | - | - | - | - | - | 4 |
| 5 slot BP | PCE-5B04-20B1E | 1 | - | - | - | - | - | 2 | - | - |
| | PCE-5B05-02A1E | 1 | - | 1 | - | - | - | - | - | 2 |
| | PCE-5B05-03A1E | 1 | - | - | - | - | - | - | - | 3 |
| | PCE-5B05-04A1E | - | - | - | - | - | - | - | - | 4 |
| 6 slot BP | PCE-5B06-00A1E | 1 | - | - | 4 | - | - | - | - | - |
| | PCE-5B06-03A1E | 1 | - | 1 | - | - | - | - | - | 3 |
| | PCE-5B06-04A1E | 1 | - | - | - | - | - | - | - | 4 |
| 8 slot BP | PCE-5B07-04A1E | 1 | - | 1 | - | - | - | - | - | 4 |
| | PCE-5B08-02A1E | 1 | - | - | 4 | - | - | - | - | 2 |
| 10 slot BP | PCE-5B09-04A1E | 1 | - | 3 | - | - | - | - | - | 4 |
| | PCE-5B09-06A1E | 1 | - | 1 | - | - | - | - | - | 6 |
| 14 slot BP | PCE-5B10-04A1E | 1 | - | - | 4 | - | - | - | - | 4 |
| | PCE-5B12-07A1E | 1 | - | 3 | - | - | - | - | - | 7 |
| | PCE-5B12-64C1E | 1 | - | - | - | 4 | 2 | - | - | 4 |
| | PCE-5B13-08A1E | 1 | - | - | 3 | - | - | - | - | 8 |
| | PCE-5B12D-04A1E | 1 | - | - | - | - | - | - | - | 4 |
| 20 slot BP | PCE-5B12-00A1E | 10 | - | 1 | - | - | - | - | - | - |
| | PCE-5B16Q-02A1E | 1 | - | - | - | - | - | - | - | 2 |
| | PCE-5B18-88B1E | 1 | - | - | - | 8 | - | - | - | 8 |
| | PCE-5B19-00A1E | 17 | - | 1 | - | - | - | - | - | - |

| Category | Model Name | Wallmount/Desktop Chassis | | | | | |
|-----------------|-----------------|---------------------------|----------|----------|-----------|----------|----------|
| | | IPC-6025 | IPC-6606 | IPC-6806 | IPC-6806W | IPC-6608 | IPC-7132 |
| 1U Butterfly BP | PCE-5B03V-01A1E | - | - | - | - | - | - |
| | PCE-5B03V-00A1E | - | - | - | - | - | - |
| 2U Butterfly BP | PCE-5B05V-30B1E | - | - | - | - | - | - |
| | PCE-5B06V-00A1E | - | - | - | - | - | - |
| | PCE-5B06V-04A1E | - | - | - | - | - | - |
| 5 slot BP | PCE-5B04-20B1E | ✓ | - | - | - | - | - |
| | PCE-5B05-02A1E | ✓ | - | - | - | - | - |
| | PCE-5B05-03A1E | ✓ | - | - | - | - | - |
| | PCE-5B05-04A1E | ✓ | - | - | - | - | - |
| 6 slot BP | PCE-5B06-00A1E | - | ✓ | - | ✓ | - | - |
| | PCE-5B06-03A1E | - | ✓ | - | ✓ | - | - |
| | PCE-5B06-04A1E | - | ✓ | - | ✓ | - | - |
| 8 slot BP | PCE-5B07-04A1E | - | - | - | - | ✓ | - |
| | PCE-5B08-02A1E | - | - | - | - | ✓ | - |
| 10 slot BP | PCE-5B09-04A1E | - | - | - | - | - | ✓ |
| | PCE-5B09-06A1E | - | - | - | - | - | ✓ |
| 14 slot BP | PCE-5B10-04A1E | - | - | - | - | - | - |
| | PCE-5B12-07A1E | - | - | - | - | - | - |
| | PCE-5B12-64C1E | - | - | - | - | - | - |
| | PCE-5B13-08A1E | - | - | - | - | - | - |
| | PCE-5B12D-04A1E | - | - | - | - | - | - |
| 20 slot BP | PCE-5B12-00A1E | - | - | - | - | - | - |
| | PCE-5B16Q-02A1E | - | - | - | - | - | - |
| | PCE-5B18-88B1E | - | - | - | - | - | - |
| | PCE-5B19-00A1E | - | - | - | - | - | - |

✓: supported, -: not supported, △: optional

PCI/ISA Backplanes

Selection Guide

Yes: supported/- : not supported/Δ : optional

| Category | Model Name | Slot per segment | | | | | Segment | AT | ATX | 1U Chassis | | 2U Chassis | | 4U Chassis | | |
|-----------------|-------------------|------------------|-----|-------|-----------|---------|---------|----|-----|------------|----------|------------|---------|------------|---------|---------|
| | | ISA | PCI | PICMG | PICMG/PCI | ISA/PCI | | | | ACP-1010 | ACP-1320 | ACP-2000 | IPC-602 | IPC-510 | IPC-610 | IPC-611 |
| | | | | | | | | | | 2-slot | 2-slot | 6-slot | 6-slot | 15-slot | 15-slot | 15-slot |
| 1U Butterfly BP | PCA-6103P2V-0A2E* | - | 2 | 1 | - | - | 1 | - | ✓ | ✓ | ✓ | - | - | - | - | - |
| 2U Butterfly BP | PCA-6105P4V-0B3E* | - | 4 | 1 | - | - | 1 | - | ✓ | - | - | ✓ | ✓ | - | - | - |
| | PCA-6106P3V-0B2E* | 1 | 3 | 2 | - | - | 1 | ✓ | ✓ | - | - | ✓ | ✓ | - | - | - |
| 5 Slot BP | PCA-6105P3-5A1E | 1 | 2 | 1 | - | 1 | 1 | - | ✓ | - | - | - | - | - | - | - |
| 6/8 Slot BP | PCA-6106P4-0A2E | - | 4 | 2 | - | - | 1 | ✓ | ✓ | - | - | - | - | - | - | - |
| | PCA-6106P3-0D2E | 2 | 2 | 1 | 1 | - | 1 | ✓ | ✓ | - | - | - | - | - | - | - |
| | PCA-6108P6-0C1E | 1 | 5 | 1 | 1 | - | 1 | ✓ | ✓ | - | - | - | - | - | - | - |
| | PCA-6108P4-0C2E | 3 | 3 | 1 | 1 | - | 1 | ✓ | ✓ | - | - | - | - | - | - | - |
| | PCA-6108-0B2E | 8 | - | - | - | - | 1 | ✓ | ✓ | - | - | - | - | ✓ | ✓ | ✓ |
| 14/15 Slot BP | PCA-6114P12-0B3E | 1 | 11 | 1 | 1 | - | 1 | ✓ | ✓ | - | - | - | - | ✓ | ✓ | ✓ |
| | PCA-6114P10-0B2E | 2 | 10 | 2 | - | - | 1 | ✓ | ✓ | - | - | - | - | ✓ | ✓ | ✓ |
| | PCA-6114P7-0E1E | 4 | 6 | 3 | - | 1 | 1 | ✓ | ✓ | - | - | - | - | ✓ | ✓ | ✓ |
| | PCA-6114P4-0C2E | 8 | 4 | 2 | - | - | 1 | ✓ | ✓ | - | - | - | - | ✓ | ✓ | ✓ |
| | PCA-6113P4R-0C2E | 7 | 4 | 2 | - | - | 1 | ✓ | ✓ | - | - | - | - | ✓ | ✓ | ✓ |
| | PCA-6114-0B2E | 14 | - | - | - | - | 1 | ✓ | ✓ | - | - | - | - | - | - | - |
| 20 Slot BP | PCA-6113DP4-0A2E | 1 | 3,4 | 1,2 | 1,0 | - | 2 | ✓ | ✓ | - | - | - | - | - | - | - |
| | PCA-6120P18-0A2E | 1 | 17 | 1 | 1 | - | 1 | ✓ | Δ | - | - | - | - | - | - | - |
| | PCA-6120P4-0B2E | 14 | 4 | 2 | - | - | 1 | ✓ | Δ | - | - | - | - | - | - | - |
| | PCA-6120P12-0A2E | 7 | 11 | 1 | 1 | - | 1 | ✓ | Δ | - | - | - | - | - | - | - |
| | PCA-6119P7-0C1E | 10 | 7 | 2 | - | - | 1 | ✓ | Δ | - | - | - | - | - | - | - |
| | PCA-6120Q-0B2E | 5 | - | - | - | - | 4 | ✓ | Δ | - | - | - | - | - | - | - |

| Category | Model Name | 4U Chassis | | | | | | 6U Chassis | Wallmount/Desktop Chassis | | | | Cage |
|-----------------|-------------------|------------|----------|----------|----------|----------|---------|------------|---------------------------|----------|--------------------|----------|----------|
| | | ACP-4000 | ACP-4010 | ACP-4320 | ACP-4340 | ACP-4360 | IPC-623 | IPC-622 | IPC-6608 | IPC-6606 | IPC-6806/IPC-6806W | IPC-6025 | IPC-6006 |
| | | 15-slot | 15-slot | 15-slot | 15-slot | 15-slot | 20-slot | 20-slot | 8-slot | 6-slot | 6-slot | 5-slot | 6-slot |
| 1U Butterfly BP | PCA-6103P2V-0A2E* | - | - | - | - | - | - | - | - | - | - | - | - |
| 2U Butterfly BP | PCA-6105P4V-0B3E* | - | - | - | - | - | - | - | - | - | - | - | - |
| | PCA-6106P3V-0B2E* | - | - | - | - | - | - | - | - | - | - | - | - |
| 5 Slot BP | PCA-6105P3-5A1E | - | - | - | - | - | - | - | - | - | - | ✓ | - |
| 6/8 Slot BP | PCA-6106P4-0A2E | - | - | - | - | - | - | - | - | ✓ | ✓ | - | ✓ |
| | PCA-6106P3-0D2E | - | - | - | - | - | - | - | - | ✓ | ✓ | - | ✓ |
| | PCA-6108P6-0C1E | - | - | - | - | - | - | - | ✓ | - | - | - | - |
| | PCA-6108P4-0C2E | - | - | - | - | - | - | - | ✓ | - | - | - | - |
| 14/15 Slot BP | PCA-6114P12-0B3E | ✓ | ✓ | ✓ | ✓ | ✓ | - | - | - | - | - | - | - |
| | PCA-6114P10-0B2E | ✓ | ✓ | ✓ | ✓ | ✓ | - | - | - | - | - | - | - |
| | PCA-6114P7-0E1E | ✓ | ✓ | ✓ | ✓ | ✓ | - | - | - | - | - | - | - |
| | PCA-6114P4-0C2E | ✓ | ✓ | ✓ | ✓ | ✓ | - | - | - | - | - | - | - |
| | PCA-6113P4R-0C2E | ✓ | ✓ | ✓ | ✓ | ✓ | - | - | - | - | - | - | - |
| | PCA-6114-0B2E | ✓ | ✓ | ✓ | ✓ | ✓ | - | - | - | - | - | - | - |
| | PCA-6113DP4-0A2E | - | ✓ | - | - | - | - | - | - | - | - | - | - |
| 20 Slot BP | PCA-6120P18-0A2E | - | - | - | - | - | ✓ | ✓ | - | - | - | - | - |
| | PCA-6120P4-0B2E | - | - | - | - | - | ✓ | ✓ | - | - | - | - | - |
| | PCA-6119P7-0C1E | - | - | - | - | - | ✓ | ✓ | - | - | - | - | - |
| | PCA-6119P7-0B3E | - | - | - | - | - | ✓ | ✓ | - | - | - | - | - |
| | PCA-6120Q-0B2E | - | - | - | - | - | ✓ | ✓ | - | - | - | - | - |

Remarks:

* : only compatible with Advantech's 1U/2U chassis

✓: supported, - : not supported, Δ: optional

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O Modules

8

Industrial I/O and Video Solutions

Backplanes Compatible with Half-Size SBCs

Selection Guide

| Interface | Category | Model Name | Slots per segment | | | | | | | Segment |
|-------------------------------|----------|-------------------|-------------------|-----|----------|----------|---------|---------|-------|---------|
| | | | ISA | PCI | PCIe x16 | PCIe x 8 | PCIe x4 | PCIe x1 | PICMG | |
| Pure ISA Backplane | - | PCA-6104-0C2E | 3 | - | - | - | - | - | 1 | 1 |
| | 6-slot | PCA-6106-0B2E | 5 | - | - | - | - | - | 1 | 1 |
| | - | PCA-6108-0B2E * | 7 | - | - | - | - | - | 1 | 1 |
| | 8-slot | PCA-6108E-0C2E | 7 | - | - | - | - | - | 1 | 1 |
| Pure PCI Backplane | - | PCA-6104P4-0B2E | - | 3 | - | - | - | - | 1 | 1 |
| | 6-slot | PCA-6105P5-0B2E | - | 4 | - | - | - | - | 1 | 1 |
| | 8-slot | PCA-6108P8-0A2E | - | 7 | - | - | - | - | 1 | 1 |
| PCI/PCIe Backplane | 1U | PCI-7103P1V-01A1E | - | 1 | - | - | 1 | - | 1 | 1 |
| PICMG1.3 Half-Size Backplanes | 6-slot | PCE-3B03-00A1E | - | - | 1 | - | 1 | - | 1 | 1 |
| | 6-slot | PCE-3B06-00A1E | - | - | 1 | - | - | 4 | 1 | 1 |
| | 6-slot | PCE-3B06-03A1E | - | 3 | 1 | - | - | 1 | 1 | 1 |
| | 6-slot | PCE-3B06-02A1E | - | 2 | 1 | - | - | 2 | 1 | 1 |
| | 3-slot | PCE-3B03A-00A1E | - | - | 1 | - | 1 | - | 1 | 1 |
| | 3-slot | PCE-3B03-01A1E | - | 1 | 1 | - | - | - | 1 | 1 |
| | 14-slot | PCE-3B12-08A1E | - | 8 | 1 | - | - | 2 | 1 | 1 |
| | 14-slot | PCE-4B13-08A1E | - | 8 | - | 2 | - | 2 | 1 | 1 |
| | 14-slot | PCE-4B12-03A1E | - | 3 | - | 1 | 4 | 3 | 1 | 1 |
| | 14-slot | PCE-4B13-00A1E | - | - | - | 1 | 11 | - | - | - |

| Interface | Model Name | AT | ATX | ACP-4020 | ACP-4D00 | IPC-6806S* | IPC-6006S | IPC-3026 | IPC-3012 |
|----------------------|-----------------|----|-----|-----------|-----------|------------|-----------|-----------|-----------|
| | | | | Rackmount | Rackmount | Wallmount | Wallmount | Wallmount | Wallmount |
| | | | | 14-slot | 6-slot | 6-slot | 6-slot | 6-slot | 3-slot |
| Pure ISA Backplane | PCA-6104-0C2E | ✓ | ✓ | - | - | - | - | - | - |
| | PCA-6106-0B2E | ✓ | ✓ | - | - | ✓ | ✓ | ✓ | - |
| | PCA-6108-0B2E | ✓ | ✓ | - | - | - | - | - | - |
| | PCA-6108E-0C2E | ✓ | ✓ | - | - | - | - | - | - |
| Pure PCI Backplane | PCA-6104P4-0B2E | ✓ | ✓ | - | - | - | - | - | - |
| | PCA-6105P5-0B2E | ✓ | ✓ | - | ✓ | ✓ | ✓ | ✓ | - |
| | PCA-6108P8-0A2E | ✓ | ✓ | - | - | - | - | - | - |
| Half-Size Backplanes | PCE-3B03-00A1E | - | ✓ | - | ✓ | ✓ | - | ✓ | - |
| | PCE-3B06-00A1E | - | ✓ | - | ✓ | ✓ | - | ✓ | - |
| | PCE-3B06-03A1E | - | ✓ | - | ✓ | ✓ | - | ✓ | - |
| | PCE-3B06-02A1E | - | ✓ | - | ✓ | ✓ | - | ✓ | - |
| | PCE-3B03A-00A1E | - | ✓ | - | - | - | - | - | ✓ |
| | PCE-3B03-01A1E | - | ✓ | - | - | - | - | - | ✓ |
| | PCE-3B12-08A1E | - | ✓ | ✓ | - | - | - | - | - |
| | PCE-4B13-08A1E | - | ✓ | ✓ | - | - | - | - | - |
| | PCE-4B12-03A1E | - | ✓ | ✓ | - | - | - | - | - |
| | PCE-4B13-00A1E | - | ✓ | ✓ | - | - | - | - | - |

✓: supported, -: not supported, △: optional

Extension Modules for Slot SBCs



PCA-AUDIO-HDA1E

- 7.1 Channel HD Audio Extension Module
- Line-in, Mic-in, Lin-out, Front-out, Speaker-out, Rear-out, Subcen-out, Side-out
- Dimensions (L x H) : 47.5 x 80.74 mm (1.87" x 3.17")



PCA-COM232-00A1E

- 4 RS-232 series ports extension module by LPC connector on CPU card.
- Dimensions (L x H) : 31.5 x 48 mm (1.24" x 1.88")



PCA-COM485-00A1E

- 4 RS-422/485 series ports extension module by LPC connector on CPU card.
- With Auto-flow control function
- Dimensions (L x H) : 31.5 x 48 mm (1.24" x 1.88")



PCE-SA01-00A1E

- I/O extension stack board
- 1 DP, 2 USB 3.0, MIC-in, LINE-out
- Dimensions (L x H) : 68 x 125 mm (2.67" x 4.92")
- Supports Model: PCE-3029, PCE-4128, PCE-4129



PCA-5650-00A1E

- 2 VGA output Mini PCI Express Graphic card
- GPU: Silicon Motion SM750
- VGA output: 1920 x 1080, up to 75Hz vertical rate
- 16 Mb of embedded DDR memory



PCA-TPM-00A1E

- Trusted platform module compliant with TCG 1.2 specification and TCG software stack 1.2 via LPC connector on CPU card
- Hardware based data protection solution for storage device encryption and decryption
- Dimensions (L x H) : 31.5 x 30.5 mm (1.24" x 1.2")



IPMI-1000-00A1E

- IPMI2.0 Server-grade remote control solution
- OS independent hardware-based solution
- Real-time and centralized management
- KVM over IP remote control function
- User friendly UI and utility
- Supports Model: PCE-5126WG2, PCE-7127, PCE-5128



PCA-TPM-00B1E

- Trusted platform module compliant with TCG 2.0 specification and TCG software stack 2.0 via LPC connector on CPU card
- Hardware based data protection solution for storage device encryption and decryption
- Dimensions (L x H) : 31.5 x 30.5 mm (1.24" x 1.2")

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O Modules

8


Industrial I/O and Video Solutions

ATX Motherboards



| Model Name | | AIMB-701 | AIMB-782 |
|------------------|-------------------------|---|--|
| Processor System | CPU | 2nd/3rd Gen Intel Core i7/i5/i3/Pentium | 2nd/3rd Gen Intel Core i7/i5/i3/Pentium |
| | Socket | LGA1155 | LGA1155 |
| | Max. Speed | 3.4 GHz | 3.4 GHz |
| | Front Side Bus | - | - |
| | Cache | L3: up to 8 MB (depends on CPU) | L3: up to 8 MB (depends on CPU) |
| | Chipset | Intel H61 | Intel Q77 |
| | BIOS | AMI 64 Mbit SPI | AMI 64 Mbit SPI |
| Expansion Slot | PCIe x16 | 1 (Gen2) | 1 (Gen3) |
| | PCIe x4 | 1 for VG SKU (Gen2) | 1 (Gen2) |
| | PCIe x1 | 1 for G2 SKU (Gen2) | 1 (Gen2) |
| | PCI | 5 | 4 |
| Memory | Technology | Dual Channel DDR3 1066/1333/1600 (1600 is only supported by Core i7/i5/i3 3xxx series processors) | Dual Channel DDR3 1066/1333/1600 MHz |
| | Max. Capacity | 16 GB | 32 GB |
| | Socket | 2 x 240-pin DIMM | 4 x 240-pin DIMM |
| Graphics | Controller | Intel HD Graphics | Intel HD Graphics |
| | VRAM | 1 GB maximum shared memory with 2 GB and above system memory installed | Shared system memory up to 1 GB |
| Ethernet | Interface | 10/100/1000 Mbps | 10/100/1000 Mbps |
| | Controller | GbE LAN1: Intel 82579V, GbE LAN2: Intel 82583V | GbE LAN1: Intel 82579LM, GbE LAN2: Intel 82583V |
| SATA | Max. Data Transfer Rate | 300 MB/s | 600 MB/s; 300 MB/s |
| | Channel | 4 | 6 (SW RAID) |
| EIDE | Mode | - | - |
| | Channel | - | - |
| I/O Interface | VGA | 1 | 1 |
| | DVI | 1 for G2 version | 1 |
| | USB | 10 | 14 (4 USB 3.0 and 10 USB 2.0) |
| | Serial | 6 for G2 version (3 x RS-232, 1 x RS-232/422/485 with auto-flow control) | 6 |
| | Parallel | 1 | 1 |
| | FDD | - | - |
| | PS/2 | 2 (1 x rear I/O and 1 x wafer box) | 2 (1 x keyboard and 1 x mouse) |
| | Ethernet (GbE) | 2 for G2 version; 1 for VG version | 2 |
| | Audio | Mic-in, Line-out | Mic-in, Line-out |
| | Output | System reset | System reset |
| Watchdog Timer | Interval | Programmable 1 ~ 255 sec | Programmable, 1 ~ 255 sec |

✓: supported, -: not supported, △: optional



| Model Name | | AIMB-784 | AIMB-705 | AIMB-785 |
|------------------|-------------------------|---|--|---|
| Processor System | CPU | 4th Gen Intel Core i7/i5/i3/Pentium | 6th/7th Gen Intel Core i7/i5/i3/Pentium | 6th/7th Gen Intel Core i7/i5/i3/Pentium |
| | Socket | LGA1150 | LGA1151 | LGA1151 |
| | Max. Speed | 3.7 GHz | 3.9 GHz | 3.9 GHz |
| | Front Side Bus | - | - | - |
| | Cache | L3: up to 8 MB (depends on CPU) | L3: up to 8 MB (depends on CPU) | L3: up to 8 MB (depends on CPU) |
| | Chipset | Intel Q87 | Intel H110 | Intel Q170 |
| | BIOS | AMI 128 Mbit SPI | AMI 128 Mbit SPI | AMI 128 Mbit SPI |
| Expansion Slot | PCIe x16 | 1 (Gen3) | 1 (Gen3) | 1 (Gen3) |
| | PCIe x4 | 1 (Gen2) | 1 (Gen2) | 3 (Gen3) |
| | PCIe x1 | 1 (Gen2) | - | - |
| | PCI | 4 | 5 | 3 |
| Memory | Technology | Dual Channel DDR3 1333/1600 MHz | Dual Channel DDR4 1866/2133 MHz | Dual Channel DDR4 1866/2133 MHz |
| | Max. Capacity | 32 GB | 32 GB | 64 GB |
| | Socket | 4 x 240-pin DIMM | 2 x 288-pin DIMM | 4 x 288-pin DIMM |
| Graphics | Controller | Intel HD Graphics | Intel HD Graphics | Intel HD Graphics |
| | VRAM | Shared system memory up to 1 GB | Shared system memory is subject to OS | Shared system memory is subject to OS |
| Ethernet | Interface | 10/100/1000 Mbps | 10/100/1000 Mbps | 10/100/1000 Mbps |
| | Controller | GbE LAN1: Intel I217LM, GbE LAN2: Intel I211AT | GbE LAN1: Intel I219V GbE LAN2: Intel I211AT (for G2 version) | GbE LAN1: Intel I219LM, GbE LAN2: Intel I211AT |
| SATA | Max. Data Transfer Rate | 600 MB/s | 600 MB/s | 600 MB/s |
| | Channel | 6 (SW RAID) | 4 | 6 (SW RAID) |
| EIDE | Mode | - | - | - |
| | Channel | - | - | - |
| I/O Interface | VGA | 1 | 1 | 1 |
| | DVI | 2 | 1(for G2 version) | 2 |
| | USB | 13 (4 USB 3.0 and 9 USB 2.0) | 9 (4 USB 3.0 and 5 USB 2.0) | 13 (6 USB 3.0 and 7 USB 2.0) |
| | Serial | 6 | 6 (for G2 version) 2 (for VG version) | 6 |
| | Parallel | 1 | 1 | 1 |
| | FDD | - | - | - |
| | PS/2 | 2 (1 x keyboard and 1 x mouse) | 2 (1 x rear I/O and 1 x wafer box) | 1 (internal wafer box) |
| | Ethernet (GbE) | 2 | 2 for G2 version; 1 for VG version | 2 |
| | Audio | Mic-in, Line-out | Mic-in, Line-out | Mic-in, Line-out |
| Watchdog Timer | Output | System reset | System reset | System reset |
| | Interval | Programmable, 1 ~ 255 sec | Programmable, 1-255 Sec | Programmable, 1-255 Sec |

✓: supported, -: not supported, △: optional

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O Modules

8

Industrial I/O and Video Solutions

Riser Cards



Selection Guide

| Model Name | | AIMB-RP10P-01A1E | AIMB-RF10F-01A1E | AIMB-RP30P-03A1E | AIMB-RP3PF-21A1E | AIMB-RP3P8-12A1E |
|-----------------|----------|------------------|------------------|------------------|--------------------|-------------------|
| Interface | | PCI | PCIe x 16 | PCI | PCIe x16/PCI | PCIe x16/PCI |
| Expansion Slots | | 1 PCI | 1 PCIe x 16 | 3 PCI | 1 PCIe x16 + 2 PCI | 2 PCIe x8 + 1 PCI |
| Chassis | 1U | ✓ | ✓ | - | - | - |
| | 2U | - | - | ✓ | ✓ | ✓ |
| ATX | AIMB-785 | - | ✓ | - | - | - |
| | AIMB-784 | - | ✓ | - | - | - |
| | AIMB-782 | - | - | - | - | - |
| | AIMB-781 | - | ✓ | - | - | - |
| | AIMB-780 | ✓ | ✓ | ✓ | ✓ | ✓ (WG2 Only)* |
| | AIMB-705 | ✓ | - | ✓ | ✓ | - |
| | AIMB-701 | - | ✓ | - | - | - |
| | AIMB-769 | - | ✓ | - | - | - |
| | AIMB-767 | ✓ | ✓ | ✓ | ✓ | - |
| | AIMB-766 | ✓ | - | ✓ | ✓ | - |
| | AIMB-763 | - | ✓ | - | ✓ | - |

*Note: AIMB-RP3P8-12A1E is not compatible with ACP-2010MB/2320MB, IPC-603MB chassis unless riser card bracket is changed to P/N: 1950014302N001.



Selection Guide

| Model Name | | AIMB-R4104-01A1E | AIMB-R430P-03A2E | AIMB-R4301-03A1E | AIMB-R431F-21A1E | AIMB-R43PF-21A1E |
|-----------------|----------|------------------|------------------|------------------|------------------------|--------------------|
| Interface | | PCIe x4 | PCIe x4 | PCIe x4 | PCIe x16/PCIe x4 | PCIe x16/PCIe x4 |
| Expansion Slots | | 1 PCIe x4 | 3 PCI | 3 PCIe x1 | 1 PCIe x16 + 2 PCIe x1 | 1 PCIe x16 + 2 PCI |
| Chassis | 1U | ✓ | - | - | - | - |
| | 2U | - | ✓ | ✓ | ✓ | ✓ |
| ATX | AIMB-785 | ✓ | ✓ | △ | □ | ✓ |
| | AIMB-784 | - | - | - | □ | ✓ |
| | AIMB-782 | - | ✓ | - | □ | ✓ |
| | AIMB-781 | ✓ | ✓ | ✓ | ✓ | ✓ |
| | AIMB-780 | - | - | - | - | - |
| | AIMB-701 | ✓ | ✓ | △ | - | - |
| | AIMB-769 | ✓ | ✓ | △ | - | - |
| | AIMB-767 | - | - | - | - | - |
| | AIMB-766 | - | - | - | - | - |
| | AIMB-763 | - | - | - | - | - |

✓: Fully compatible

□: Only the PCIe x 16 and PCIe x1 (bottom slot) connectors work.

△: Only one PCIe x1 connector works (top slot).

Industrial Computer Chassis



| Model Name | | IPC-3012 | IPC-3026 | IPC-6806S | IPC-6806S-D | IPC-6806/6806W |
|-------------------------------|--------------------|-------------------------|-----------------------------|-----------------------------|-----------------------------|---|
| Form Factor Support | | PICMG 1.3 Half-size SBC | PICMG 1.0/1.3 Half-size SBC | PICMG 1.0/1.3 Half-size SBC | PICMG 1.0/1.3 Half-size SBC | PICMG 1.0 Full-size SBC / PICMG 1.0/1.3 Full-size SBC |
| Drive Bay | Slim Optical Drive | - | - | - | 1 | - |
| | 2.5" | 2 | - | - | 1 (hot-swap) | - |
| | 3.5" | External | 1 | 1 | - | 1 / 1 |
| | | Internal | - | 1 | 1 | 1 / 1 |
| | 5.25" | - | - | - | - | 0 / 1 |
| Front I/O | USB | 2 | 2 | 2 | 2 | 2 / 2 |
| | PS/2 | - | - | - | - | - / - |
| Cooling | No. of Fans | 2 | 1 | 1 | 1 | 1 / 1 |
| | CFM | 27 | 44.6 | 53 | 53 | 53 / 58 |
| Power Supply | AC | 250W Flex ATX | 150W Flex ATX | 250W Flex ATX | 250W Flex ATX | 250W Flex ATX 350W Flex ATX |
| | AC Redundant | - | - | - | - | - |
| | DC | - | - | - | - | - |
| No. of Slots for add-on cards | | 2 | 4 | 4 | 4 | 5 / 5 |
| No. of Full-size Cards | | - | - | - | - | 6 / 6 |
| Passive Backplane Options | PICMG 1.0 | - | ✓ | ✓ | ✓ | ✓ |
| | PICMG 1.3 | ✓ | ✓ | ✓ | ✓ | - / ✓ |
| Intelligent System Module | | - | ✓ | - | - | - |
| Dimensions (W x H x D) | mm | 232 x 90 x 232 | 150 x 222 x 270 | 191 x 178 x 290 | 191 x 178 x 290 | 166 x 178 x 398/ 198 x 221 x 398 |
| | inch | 9.13 x 3.54 x 9.13 | 5.9 x 8.74 x 10.63 | 7.5 x 7.01 x 11.42 | 7.5 x 7.01 x 11.42 | 6.54 x 7.01 x 15.67/ 7.8 x 8.7 x 15.67 |
| Weight | kg | 3.24 | 4.4 | 5.6 | 5.6 | 6.3 / 8 |
| | lb | 7.14 | 9.7 | 12.3 | 12.3 | 13.9 / 17.6 |

✓: supported, -: not supported, △: optional

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O Modules

8

Industrial I/O and Video Solutions

Industrial Computer Chassis



| Model Name | | IPC-6606/6608 | IPC-7132 | IPC-5120/7120 | IPC-6025 | IPC-5122 | IPC-7130 / IPC-7130L | IPC-7220 |
|-------------------------------|--------------------|--|------------------------|---|--------------------------------|------------------------|-------------------------------------|--------------------------------|
| Form Factor Support | | PICMG 1.0/1.3 Full-size SBC | ATX / Micro ATX | Micro ATX / ATX | PICMG 1.0/1.3 Full-size SBC | Micro ATX | ATX / Micro ATX | ATX / Micro ATX |
| Drive Bay | Slim Optical Drive | - | - | - / - | - | 1 | - | - |
| | 2.5" | - | - | - | - | - | - | - |
| | 3.5" | External | 1 | 1 / 1 | 1 | 1 | 2 (hot-swap) / 2 | 1 |
| | | Internal | 1 / 1 | 2 | 1 / 1 | 1 | 1 / 1 | 1 |
| | 5.25" | 1 / 2 | 1 | 1 / 1 | - | - | 1 / 1 | 2 |
| Front I/O | USB | 2 / 2 | 2 | Front I/O chassis | 2 | 2 | 2 / 2 | 2 |
| | PS/2 | - / - | - | - | - | - | - | - |
| Cooling | No. of Fans | 1 / 1 | 1 | 1 + 1 | 1 | 1 | 1 + 1 | 1 |
| | CFM | 53 / 85 | 85 | 85 / 10 | 46.6 | 85 | 73.8 / 21.2 | 85 |
| Power Supply | AC | 250W PS/2 300W PS/2 400W PS/2 | 300W PS/2 400W PS/2 | 250W Flex ATX 350W Flex ATX | 270W Flex ATX 400W Flex ATX | 300W PS/2 400W PS/2 | 300W PS/2 400W PS/2 500W PS/2 | 300W PS/2 400W PS/2 |
| | AC Redundant | - | - | - | - | - | 350W Mini RPS 500W Mini RPS | 350W Mini RPS 500W Mini RPS |
| | DC | - | - | - | - | - | - | - |
| No. of Slots for add-on cards | | 5 / 7 | 7 | 4 / 7 | 4 | 4 | 7 | 7 |
| No. of Full-size Cards | | 6 / 8 | 7 | - | 5 | - | 7 | 7 |
| Passive Backplane Options | PICMG 1.0 | ✓ | - | - | ✓ | - | - | - |
| | PICMG 1.3 | ✓ | ✓ | - | ✓ | - | - | - |
| Intelligent System Module | | - | - | - | ✓ | ✓ | ✓/- | ✓ |
| Dimensions (W x H x D) | mm | 173 x 254 x 396/ 173 x 315 x 410 | 200 x 330 x 430 | 320 x 164 x 316.5/ 380 x 164 x 316.5 | 111 x 212 x 420 | 157 x 360 x 340 | 200 x 320 x 480 | 200 x 320 x 480 |
| | inch | 6.8 x 10 x 15.6 / 6.8 x 12.4 x 16.1 | 7.9 x 13 x 16.9 | 12.6 x 6.5 x 12.5/ 15 x 6.5 x 12.5 | 4.4 x 8.3 x 16.5 | 6.2 x 14.2 x 13.4 | 7.9 x 12.6 x 18.9 | 7.9 x 12.6 x 18.9 |
| Weight | kg | 9 / 11 | 9.96 | 6.54 / 7.01 | 4.7 | 6.5 | 12.8 | 14 |
| | lb | 19.8 / 24.2 | 21.93 | 14.42 / 15.45 | 10.3 | 14.3 | 28.2 | 30.8 |

✓: supported, -: not supported, △: optional



| Model Name | | 1U Rackmount | 2U Rackmount | | | | 4U Rackmount | | |
|---------------------------------|--|---|-------------------------|--|--------------------------------|---|--|--|---|
| | | ACP-1010 | IPC-603 | ACP-2000 | ACP-2010/2320 | ACP-2020 | IPC-510 | IPC-610-L/ IPC-611 | IPC-631 |
| Form Factor Support | | PICMG 1.0/1.3 Full-Size SBC ATX/Micro-ATX | ATX/Micro-ATX | PICMG 1.0/1.3 Full-Size SBC | ATX/Micro-ATX | ATX / Micro-ATX | PICMG1.0/1.3 Full size SBC ATX/Micro-ATX | PICMG1.0/1.3 Full size SBC ATX/Micro-ATX | ATX/Micro-ATX |
| Drive Bay | Slim Optical Drive | 1 | 1 | 1 | -/1 | 1 | - | - | 1 |
| | 2.5" | 1 x 3.5" or 2 x 2.5" | - | - | - | 2 external (optional hot- swap module) 2 internal | - | - | 4 (2 external optional hot- swap) |
| | 3.5" | Hot-swap | - | - | - | - / 2 (SATA) | - | - | - |
| | | External | 1 | - | 2 | 1 / - | - | 1 | - |
| | | Internal | 1 x 3.5" or 2 x 2.5" | 1 | - | 2 | - | 1 | - |
| Front I/O | 5.25" | - | - | - | 1 / - | - | 3 | 3 | - |
| | USB | 2 | Front I/O chassis | 2 | 2 | 2 (USB 3.0) | 2 | 2 | Front I/O chassis |
| Cooling | PS/2 | - | - | 1 | 1 | - | 1 | - | - |
| | No. of Fans | 2 (MB), 4 (BP) | 2 | 2 | 2 / 3 | 1 | 1 | 1 | 2 |
| Power Supply | CFM | 2 x 24 (MB) / 3 x 24 + 1 x 15 (BP) | 2 x 47 | 2 x 47 | 2 x 47/ 2 x 47 + 1 x 28 | 41 | 77 | 85 | 2 x 82 |
| | AC | 250W Flex ATX 300W Flex ATX | 350W Flex ATX | 250W PS/2 300W PS/2 400W PS/2 500W PS/2 | 250W Flex ATX 300W Flex ATX | 350W Flex ATX | 250W PS/2 300W PS/2 400W PS/2 | 250W PS/2 300W PS/2 | 500W PS/2 |
| | AC Redundant | - | - | 300W 1+1 RPS | 250W 1+1 | 500W 2U redundant | - | 350W Mini RPS 500W Mini RPS | 500W Mini RPS |
| Dimensions (W x H x D) | DC | - | - | 300W 48V | - | - | - | - | - |
| | No. of Slots | MB: 1 BP: 3 | 3 | 6 | 3 / 3 | 7 | 14 | 15 | 7 |
| Passive Backplane Options | No. of Full-size Cards ^{Note} | MB: 0 BP: 2 | 0 | 4 | 3 / 3 | 7 | 8 | 11 | 0 |
| | PICMG 1.0 | ✓ | - | ✓ | - | - | ✓ | ✓ | - |
| Intelligent System Module | PICMG 1.3 | ✓ | - | ✓ | - | - | ✓ | ✓ | - |
| | Intelligent System Module | - | - | ✓ | ✓ | ✓ | - | - | - |
| Weight | mm | 480 x 44 x 497 | 482 x 88 x 308 | 482 x 88 x 451 | 482 x 88 x 480 | 482 x 177 x 348 | 482 x 177 x 446 | 482 x 177 x 480 | 482 x 177 x 348 |
| | inch | 19 x 1.7 x 19.6 | 19 x 3.46 x 12.1 | 19 x 3.5 x 17.8 | 19 x 3.5 x 18.9 | 19 x 7.0 x 13.7 | 19 x 7 x 17.6 | 19 x 7 x 18.9 | 19 x 7.0 x 13.7 |
| Weight | kg | 8 | 6.4 | 11.5 | 10.7/11.7 | 8 | 10.7 | 14.5 | 8 |
| | lb | 17.6 | 14.1 | 25.3 | 23.5/25.7 | 17.6 lb | 23.5 | 31.9 | 17.6 |

Note: Depending on system configuration. Board component or CPU cooler mechanical interference might reduce supported full-size card number.

✓: supported, -: not supported, △: optional

1

Software and Industry
Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and
Monitors

5

Automation Computers
and Controllers

6

Industrial
Communication

7

Remote I/O Modules

8

Industrial I/O and
Video Solutions

Industrial Computer Chassis



| Model Name | | 4U Rackmount | | | | | | | 6U Rackmount | |
|--|--------------------|--|--|---|--|---|--|--|--------------------------------|-------------------------------------|
| | | IPC-610-H | ACP-4020 | ACP-4D00 | ACP-4000 | ACP-4010/ ACP-4320 | ACP-4340 | ACP-4360 | IPC-623 | IPC-622 |
| Form Factor Support | | PICMG1.0/1.3 Full size SBC ATX/Micro-ATX | PICMG1.3 Half-size SBC ATX/Micro-ATX | PICMG 1.3/PCI Half-size SBC | PICMG1.0/1.3 Full-size SBC ATX/Micro-ATX | PICMG1.0/1.3 Full-size SBC ATX/Micro-ATX | PICMG1.0/1.3 Full size SBC ATX/Micro-ATX | PICMG1.0/1.3 Full size SBC ATX/Micro-ATX | PICMG 1.0/1.3 Full size SBC | PICMG 1.0/1.3 Full size SBC |
| Drive Bay | Slim Optical Drive | - | 1 | - | - | - | 1 | 1 | - | - |
| | 2.5" | - | 1 (Internal) | - | - | - | 1 (Internal) | - | - | - |
| | 3.5" | Hot-swap | - | - | - | - / 2 (SATA) | 4 (SATA) | 6 (SATA) | - | - |
| | | External | 1 | 2 | 1 / each node | 1 | 1 / - | - | 1 | - |
| | | Internal | - | - | - | - | 1 / - | - | 1 | 2 |
| | 5.25" | 3 | - | - | 3 | 2 | - | - | 3 | 4 |
| Front I/O | USB | 2 | 2 (USB 3.0) | 2 (USB 2.0) + 2 (USB 3.0) / each node | 2 | 4 / 2 | 2 (USB 3.0) | 2 | - | 2 |
| | PS/2 | 1 | - | - | 1 | - | - | - | - | - |
| Cooling | No. of Fans | 2 | 2 | 1 / each node | 2 | 2 / 2 | 2 | 3 | 3 | 4 |
| | CFM | 2 x 85 | 2 x 53 | 1 x 58 per node | 2 x 85 | 2 x 85/ 1 x 74 + 1 x 28 | 1 x 74 + 1 x 56 | 1 x 114 + 2 x 47 | 3 x 114 | 4 x 58 |
| Power Supply | AC | 300W PS/2 400W PS/2 500W PS/2 | 300W PS/2 400W PS/2 500W PS/2 | 250W Flex ATX 300W Flex ATX | 300W PS/2 400W PS/2 500W PS/2 | 300W PS/2 400W PS/2 500W PS/2 | 400W PS/2 500W PS/2 700W PS/2 | 400W PS/2 500W PS/2 700W PS/2 | 400W 500W | 400W PS/2 500W PS/2 700W PS/2 |
| | AC Redundant | 350W Mini RPS 500W Mini RPS | - | - | 350W Mini RPS 500W Mini RPS | 350W Mini RPS 500W Mini RPS 750W Mini RPS | 500W Mini RPS | 350W Mini RPS 500W Mini RPS | 570W 2+1 | 500W Mini RPS 750W Mini RPS |
| | DC | 300W 48V | 300W 48V | - | 300W 48V | - | - | - | - | - |
| No. of Slots | | 15 | 15 | 6 / each node | 15 | 15 / 15 | 15 | 15 | 20 | 20 |
| No. of Full-size Cards ^{Note} | | 11 | 0 | 0 | 11 | 15 / 10 | 11 | 8 | 20 | 20 |
| Passive Backplane Options | PICMG 1.0 | ✓ | - | ✓ (PCI BP only) | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | PICMG 1.3 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Intelligent System Module | | - | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | - | ✓ |
| Dimensions (W x H x D) | mm | 482 x 177 x 479 | 482 x 177 x 348 | 430 x 177 x 350 | 482 x 177 x 479 | 482 x 177 x 479 | 482 x 177 x 478 | 482 x 177 x 501 | 482 x 177 x 657 | 482 x 266 x 464 |
| | inch | 19 x 7 x 18.9 | 19 x 7.0 x 13.7 | 19 x 7.0 x 13.8 | 19 x 7 x 18.9 | 19 x 7 x 18.9 | 19 x 7.0 x 18.8 | 19 x 7.0 x 19.8 | 19 x 7 x 26 | 19 x 10.5 x 18.3 |
| Weight | kg | 15 | 8.5 | 15 | 15.2 | 16.6/17.6 | 12.5 | 19 | 26 | 30 |
| | lb | 33 | 18.7 | 33 | 33.5 | 36.5/38.7 | 27.5 | 41.8 | 57 | 66 |

Note: Depending on system configuration. Board component or CPU cooler mechanical interference might reduce supported full-size card number.

✓: supported, -: not supported, △: optional

4U CompactPCI® Chassis



| Model | | MIC-3106 | | | | MIC-3111 | | | | MIC-3121 | | | |
|--------------------------|------------------------|---|------|-------------------------------------|------|---|------|-------------------------------------|------|---|------|-------------------------------------|------|
| Backplane | slot | System x 1, Peripheral x 2 CompactPCI® peripherl slot x 2 | | | | System x 1, Peripheral x 7 CompactPCI® peripherl slot x 7 | | | | System x 1, Peripheral x 7 CompactPCI® peripherl slot x 7 | | | |
| | bus | 32-bit/33 MHz PCI bus | | | | 32-bit/33 MHz PCI bus | | | | 32-bit/33 MHz PCI bus | | | |
| | V (I/O) | +3.3 V/+5 V (selectable) | | | | +3.3 V/+5 V (selectable) | | | | +3.3 V/+5 V (selectable) | | | |
| Cooling | FAN | 1 Blower on Top (Max. 2.47CFM/FAN) 1 Fan on Bottom (Max.18 CFM/FAN) | | | | 2 Blowers on Top (Max. 2.47CFM/FAN) 1 Fan on Bottom (Max.18 CFM/FAN) | | | | 2 Blowers on Top (Max. 2.47CFM/FAN) 1 Fan on Bottom (Max.18 CFM/FAN) | | | |
| Power Supply | Input | AC 100 ~ 240 V @ 50 ~ 60 Hz, full range | | | | AC 100 ~ 240 V @ 50 ~ 60 Hz, full range | | | | AC 100 ~ 240 V @ 50 ~ 60 Hz, full range | | | |
| | Output | ATX 180W PSU | | | | ATX 180W PSU | | | | ATX 300W PSU | | | |
| | | +3.3V | +5V | +12V | -12V | +3.3V | +5V | +12V | -12V | +3.3V | +5V | +12V | -12V |
| | Max Load | 14A | 16A | 14A | 0.5A | 14A | 16A | 14A | 0.5A | 16A | 19A | 11A | 0.3A |
| | Min Load | 0.3A | 0.3A | 0.3A | 0A | 0.3A | 0.3A | 0.3A | 0A | 0A | 0.5A | 0.1A | 0A |
| Physical Characteristics | Dimensions (W x H x D) | 134 x 177 x 238 mm (5.27" x 6.96" x 9.37") | | | | 234 x 177 x 258 mm (9.21" x 6.96" x 9.37") | | | | 482 x 177 x 310 mm (18.97" x 6.96" x 12.2") | | | |
| Environment | | Operating | | Non-operating | | Operating | | Non-operating | | Operating | | Non-operating | |
| | Temperature | 0 ~ 50 °C (32 ~ 122 °F) | | -20 ~ 60 °C (-4 ~ 138 °F) | | 0 ~ 50 °C (32 ~ 122 °F) | | -20 ~ 60 °C (-4 ~ 138 °F) | | 0 ~ 50 °C (32 ~ 122 °F) | | -20 ~ 60 °C (-4 ~ 138 °F) | |
| | Humidity | 10 ~ 85% @ 40 °C, non-condensing | | 10 ~ 95% @ 40 °C, non-condensing | | 10 ~ 85% @ 40 °C, non-condensing | | 10 ~ 95% @ 40 °C, non-condensing | | 10 ~ 85% @ 40 °C, non-condensing | | 10 ~ 95% @ 40 °C, non-condensing | |
| | Vibration | 2Grms | | | | 2Grms | | | | 2Grms | | | |
| | Shock | 10G | | | | 10G | | | | 10G | | | |
| Reliability | MTBF | Backplane | | FAN module | | Backplane | | FAN module | | Backplane | | FAN module | |
| | | 800,000 hours / 50,000 hours @ 40 °C / 10,000 hours @ 80% load | | | | 800,000 hours / 50,000 hours @ 40 °C / 10,000 hours @ 80% load | | | | 800,000 hours / 50,000 hours @ 40 °C / 10,000 hours @ 80% load | | | |
| Regulatory | Conformance | RoHS, CE, FCC, UL, CCC | | | | RoHS, CE, FCC, UL, CCC | | | | RoHS, CE, FCC, UL, CCC | | | |
| Compliance | Standards | PICMG 2.0 R3.0 CompactPCI Specification PICMG 2.1 R2.0 CompactPCI Hot Swap Specification | | | | PICMG 2.0 R3.0 CompactPCI Specification PICMG 2.1 R2.0 CompactPCI Hot Swap Specification | | | | PICMG 2.0 R3.0 CompactPCI Specification PICMG 2.1 R2.0 CompactPCI Hot Swap Specification | | | |

✓: supported, -: not supported, △: optional

1

Software and Industry
Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and
Monitors

5

Automation Computers
and Controllers

6

Industrial
Communication

7

Remote I/O Modules

8

Industrial I/O and
Video Solutions

3U CompactPCI® Peripheral Cards

NEW



| Model | | MIC-3714 | MIC-3716 | MIC-3720 | MIC-3723 |
|-------------------|---------------------------|---|---|---|---|
| Form Factor | | 3U | 3U | 3U | 3U |
| Main Function | | - | - | - | - |
| Bus | PCI | 32-bit/33 MHz | 32-bit/33 MHz | 32-bit/33 MHz | 32-bit/33 MHz |
| Power Consumption | TDP | 13W | 13W | 6.7W | 12W |
| Environment | Operating Temperature | 0 ~ 60 °C (32 ~ 140 °F) | 0 ~ 60 °C (32 ~ 140 °F) | 0 ~ 60 °C (32 ~ 140 °F) | 0 ~ 60 °C (32 ~ 140 °F) |
| | non-operating temperature | -20 ~ 70 °C (-4 ~ 158 °F) | -20 ~ 70 °C (-4 ~ 158 °F) | -20 ~ 70 °C (-4 ~ 158 °F) | -20 ~ 70 °C (-4 ~ 158 °F) |
| | Humidity | 95 % @ 40 °C, non-condensing (Operating) | 95 % @ 40 °C, non-condensing (Operating) | 95 % @ 40 °C, non-condensing (Operating) | 95 % @ 40 °C, non-condensing (Operating) |
| | | 95 % @ 60 °C, non-condensing (Non-operating) | 95 % @ 60 °C, non-condensing (Non-operating) | 95 % @ 60 °C, non-condensing (Non-operating) | 95 % @ 60 °C, non-condensing (Non-operating) |
| | Vibration | 2Grms | 2Grms | 2Grms | 2Grms |
| | Shock | - | - | - | - |
| Altitude | | - | - | - | - |
| Regulatory | Conformance | FCC Class A, CE, RoHS | FCC Class A, CE, RoHS | FCC Class A, CE, RoHS | FCC Class A, CE, RoHS |
| Operating System | Compatibility | WinXP, Win 7/8/10 | WinXP, Win 7/8/10 | WinXP, Win 7/8/10 | WinXP, Win 7/8/10 |
| Compliance | Standards | PICMG 2.0 R3.0 PICMG 2.1 R2.0 | PICMG 2.0 R3.0 PICMG 2.1 R2.0 | PICMG 2.0 R3.0 PICMG 2.1 R2.0 | PICMG 2.0 R3.0 PICMG 2.1 R2.0 |



| Model | | MIC-3753 | MIC-3756 | MIC-3758 | MIC-3761 | MIC-3780 |
|-------------------|---------------------------|---|---|---|---|---|
| Form Factor | | 3U | 3U | 3U | 3U | 3U |
| Main Function | | - | - | - | - | - |
| Bus | PCI | 32-bit/33 MHz | 32-bit/33 MHz | 32-bit/33 MHz | 32-bit/33 MHz | 32-bit/33 MHz |
| Power Consumption | TDP | 3.5W | 6W | 8.3W | 4W | 8.5W |
| Environment | Operating Temperature | 0 ~ 60 °C (32 ~ 140 °F) | 0 ~ 60 °C (32 ~ 140 °F) | 0 ~ 60 °C (32 ~ 140 °F) | 0 ~ 60 °C (32 ~ 140 °F) | 0 ~ 60 °C (32 ~ 140 °F) |
| | non-operating temperature | -20 ~ 70 °C (-4 ~ 158 °F) | -20 ~ 70 °C (-4 ~ 158 °F) | -20 ~ 70 °C (-4 ~ 158 °F) | -20 ~ 70 °C (-4 ~ 158 °F) | -20 ~ 70 °C (-4 ~ 158 °F) |
| | Humidity | 95 % @ 40 °C, non-condensing (Operating) | 95 % @ 40 °C, non-condensing (Operating) | 95 % @ 40 °C, non-condensing (Operating) | 95 % @ 40 °C, non-condensing (Operating) | 95 % @ 40 °C, non-condensing (Operating) |
| | | 95 % @ 60 °C, non-condensing (Non-operating) | 95 % @ 60 °C, non-condensing (Non-operating) | 95 % @ 60 °C, non-condensing (Non-operating) | 95 % @ 60 °C, non-condensing (Non-operating) | 95 % @ 60 °C, non-condensing (Non-operating) |
| | Vibration | 2Grms | 2Grms | 2Grms | 2Grms | 2Grms |
| | Shock | - | - | - | - | n/a |
| Altitude | | - | - | - | - | n/a |
| Regulatory | Conformance | FCC Class A, CE, RoHS | FCC Class A, CE, RoHS | FCC Class A, CE, RoHS | FCC Class A, CE, RoHS | FCC Class A, CE, RoHS |
| Operating System | Compatibility | WinXP, Win 7/8/10 | WinXP, Win 7/8/10 | WinXP, Win 7/8/10 | WinXP, Win 7/8/10 | WinXP, Win 7/8/10 |
| Compliance | Standards | PICMG 2.0 R3.0 PICMG 2.1 R2.0 | PICMG 2.0 R3.0 PICMG 2.1 R2.0 | PICMG 2.0 R3.0 PICMG 2.1 R2.0 | PICMG 2.0 R3.0 PICMG 2.1 R2.0 | PICMG 2.0 R3.0 PICMG 2.1 R2.0 |

✓: supported, -: not supported, △: optional

Power Supplies

80 Plus PS/2 Single Power Supplies



| Part Number | PS8-250ATX-ZE | PS8-300ATX-ZBE | PS8-400ATX-ZE | PS8-500ATX-ZE | PS8-700ATX-ZE |
|------------------------|---|---|---|--|---|
| Form Factor | PS/2 | PS/2 | PS/2 | PS/2 | PS/2 |
| Wattage | 250W | 300W | 400W | 500W | 700W |
| 80 Plus Grade | Bronze | Bronze | Bronze | Bronze | Bronze |
| Input Range | 90 ~ 264 V _{AC} | 90 ~ 264 V _{AC} | 90 ~ 264 V _{AC} | 90 ~ 264 V _{AC} | 90 ~ 264 V _{AC} |
| Output Range | +3.3V @ 20 A +5 V @ 21 A +12 V1 @ 16 A +12 V2 @ 16 A -12 V @ 0.3 A -5 V @ 0.3 A +5 Vsb @ 2.5 A | +3.3V @ 11.12 A +5 V @ 13.2 A +12 V @ 7.64 A +12 VCPU @ 8 A -12 V @ 0.1 A -5V @ 0.05 A +5 Vsb @ 1.39 A | +3.3V @ 21 A +5 V @ 20 A +12 V1 @ 16 A +12 V2 @ 16 A -12 V @ 0.5 A -5V @ 0.3 A +5 Vsb @ 3 A | +3.3V @ 24 A +5 V @ 20 A +12 V1 @ 16 A +12 V2 @ 16 A -12 V @ 0.5 A -5V @ 0.3 A +5 Vsb @ 3 A | +3.3V @ 24 A +5 V @ 30 A +12 V1 @ 16 A +12 V2 @ 16 A +12 V3 @ 16 A +12 V4 @ 16 A -12 V @ 0.5 A -5V @ 0.5 A +5 Vsb @ 4 A |
| MTBF(hrs) | 100,000 @ 25° C | 100,000 @ 25° C | 100,000 @ 25° C | 100,000 @ 25° C | 100,000 @ 25° C |
| Dimensions (W x H x D) | 150 x 86 x 140 mm (5.91" x 3.39" x 5.51") | 150 x 86 x 140 mm (5.91" x 3.39" x 5.51") | 150 x 86 x 140 mm (5.91" x 3.39" x 5.51") | 150 x 86 x 140 mm (5.91" x 3.39" x 5.51") | 150 x 86 x 140 mm (5.91" x 3.39" x 5.51") |
| Safety | CE, FCC, UL, CB, TUV, CCC, KC | CE, FCC, UL, CB, TUV, CCC, KC, BSMI | CE, FCC, UL, CB, TUV, CCC, KC | CE, FCC, UL, CB, TUV, CCC, KC | CE, FCC, UL, CB, TUV, CCC, KC |
| Compatible Chassis | ACP-2000/IPC-602, ACP-4000, ACP-4010, ACP-4020, ACP-4320, ACP-4340, ACP-4360, IPC-6606, IPC-6608, IPC-5122, IPC-7130, IPC-7130L, IPC-7132, IPC-7220, IPC-510, IPC-610-F, IPC-610-H, IPC-610-L, IPC-611, IPC-619 | ACP-2000/IPC-602, ACP-4000, ACP-4010, ACP-4020, ACP-4320, ACP-4340, ACP-4360, IPC-6606, IPC-6608, IPC-5122, IPC-7130, IPC-7130L, IPC-7132, IPC-7220, IPC-510, IPC-610-F, IPC-610-H, IPC-610-L, IPC-611, IPC-619, HPC-5000 | ACP-2000/IPC-602, ACP-4000, ACP-4010, ACP-4020, ACP-4320, ACP-4340, ACP-4360, IPC-6606, IPC-6608, IPC-5122, IPC-7130, IPC-7130L, IPC-7132, IPC-7220, IPC-510, IPC-610-F, IPC-610-H, IPC-610-L, IPC-611, IPC-619, HPC-7442 | ACP-2000/IPC-602, ACP-4000, ACP-4010, ACP-4020, ACP-4320, ACP-4340, ACP-4360, IPC-6606, IPC-6608, IPC-5122, IPC-7130, IPC-7130L, IPC-7132, IPC-7220, IPC-510, IPC-610-F, IPC-610-H, IPC-610-L, IPC-611, IPC-619, IPC-631, HPC-7442 | ACP-2000/IPC-602, ACP-4000, ACP-4010, ACP-4020, ACP-4320, ACP-4340, ACP-4360, IPC-510, IPC-610-F, IPC-610-H, IPC-610-L, IPC-611, HPC-7442 |

PS/2 DC Power Supplies



| Model Name | PS-300ATX-DC48E |
|------------------------|---|
| Wattage | 300W |
| Input Range | 72 ~ 36 V _{DC} , 15 A |
| Outputs | +5 V @ 30 A (0.3 A min) +3.3 V @ 28 A (0.3 A min) +12 V @ 15 A (0.2 A min) -12 V @ 0.8 A, -5 V @ 0.3 A, +5 Vsb @ 2 A |
| MTBF (hrs) | 100,000 @ 25° C |
| Dimensions (W x H x D) | 150 x 86 x 140 mm (5.91" x 3.39" x 5.51") |
| Safety | UL, TUV, CB, CCC |
| Compatible Chassis | ACP-2000, ACP-4000, ACP-4010, ACP-4020, ACP-4320, ACP-4340, ACP-4360, IPC-602, IPC-610 |

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O Modules

8

Industrial I/O and Video Solutions

Power Supplies

80 Plus 1U/2U Single Power Supplies



| Part Number | PS8-500U2-XE | 96PS-A700W1U |
|------------------------|--|---|
| Form Factor | 2U | 1U |
| Wattage | 500W | 700W |
| 80 Plus Grade | Bronze | Bronze |
| Input Range | 90 ~ 264 V _{AC} | 90 ~ 264 V _{AC} |
| Output Range | +3.3V @ 20 A, +5 V @ 20 A +12 V1 @ 16 A, +12 V1 @ 16 A +12 V3 @ 16 A, -12 V @ 0.5A +5 Vsb @ 3 A | +3.3V @ 24 A, +5 V @ 30 A +12 V1 @ 16 A, +12 V2 @ 16 A +12 V3 @ 16 A, +12 V4 @ 16 A -12V @ 0.5 A, +5 Vsb @ 4 A |
| MTBF(hrs) | 100,000 @ 25° C | 100,000 @ 25° C |
| Dimensions (W x H x D) | 70 x 100 x 240 mm (2.75" x 3.93" x 9.44") | 40 x 100 x 250 mm (1.57" x 3.93" x 9.84") |
| Safety | CE, FCC, UL, CB, TUV, CCC, KC | CE, FCC, UL, CB, TUV, CCC, KC |
| Compatible Chassis | HPC-7242, HPC-7282, HPC-7320, HPC-8316 | HPC-7320, HPC-7400, HPC-8316 |

80 Plus Flex ATX Power Supplies



| Part Number | PS8-250FATX-XE | PS8-350FATX-XE |
|------------------------|--|---|
| Form Factor | Flex ATX | Flex ATX |
| Wattage | 250W | 350W |
| 80 Plus Grade | Bronze | Bronze |
| Input Range | 90 ~ 264 V _{AC} | 90 ~ 264 V _{AC} |
| Output Range | +3.3V @ 12 A +5 V @ 14 A +12 V @ 18 A -12 V @ 0.3 A +5 Vsb @ 2.5 A | +3.3V @ 16A +5 V @ 16 A +12 V1 @ 18 A +12 V2 @ 18 A -12 V @ 0.3A +5 Vsb @ 3 A |
| MTBF(hrs) | 100,000 @ 25° C | 100,000 @ 25° C |
| Dimensions (W x H x D) | 81.5 x 40.5 x 150 mm (3.2" x 1.59" x 5.9") | 81.5 x 40.5 x 150 mm (3.2" x 1.59" x 5.9") |
| Safety | CE, FCC, UL, CB, TUV, CCC, KC | CE, FCC, UL, CB, TUV, CCC, KC, BSMI |
| Compatible Chassis | ACP-1010/ACP-1320, ACP-2010/ACP-2320, ACP-4D00, IPC-3012, IPC-6806S, IPC-6806S-D, IPC-6806, IPC-5120, IPC-7120 | ACP-1010/ACP-1320, ACP-2010/ACP-2320, ACP-4D00, IPC-603, IPC-3012, IPC-6806S, IPC-6806S-D, IPC-6806, IPC-5120, IPC-7120, ACP-2020 |

80 Plus Redundant Power Supplies



| Part Number | RPS8-500ATX-XE | RPS8-750ATX-XE | RPS8-500U2-XE |
|---------------------------|---|---|---|
| Form Factor | Mini Redundant | Mini Redundant | 2U Redundant |
| Wattage | 500W 1+1 | 750W 1+1 | 500W 1+1 |
| 80 Plus Grade | Gold | Gold | Bronze |
| PMBus | Ver. 1.2 | Ver. 1.2 | - |
| Input Range | 90 ~ 264 V _{AC} | 90 ~ 264 V _{AC} | 90 ~ 264 V _{AC} |
| Output Range | +3.3V @ 20 A +5 V @ 20 A +12 V1 @ 16 A +12 V2 @ 16A +12 V3 @ 16A -5 V @ 0.3 A -12 V@ 0.5 A +5 Vsb @3 A | +3.3V @ 24 A +5 V @ 30 A +12 V @ 60.9 A -12 V@ 0.5 A +5 Vsb @ 4 A | +3.3V @ 20 A +5 V @ 25 A +12 V @ 40.2 A -12 V@ 0.5 A +5 Vsb @3.52 A |
| MTBF (hrs) | 100,000 @ 25° C | 100,000 @ 25° C | 100,000 @ 25° C |
| Dimensions (W x H x D) | 150 x 84 x 190 mm (5.9" x 3.3" x 7.48") | 150 x 84 x 200 mm (5.9" x 3.3" x 7.87") | 85 x 86.6 x 217 mm (3.34" x 3.4" x 8.54") |
| Safety | CE , FCC, UL, CB, TUV, CCC, KC | CE , FCC, UL, CB, TUV, CCC, KC | CE , FCC, UL, CB, TUV, CCC, KC |
| Compatible Chassis | IPC-7130, IPC-7130L, IPC-7220, IPC-610, IPC-611, ACP-4000, ACP-4010, ACP-4320, ACP-4340, ACP-4360, IPC-622, HPC-7442, IPC-631 | ACP-4000, ACP-4010, IPC-622, HPC-7442 | HPC-7242, HPC-7282, HPC-7320, HPC-8316, ACP-2020 |
| Single Module Part Number | 96PSRM-A500W1U-2 | 96PSRM-A750W1U | 96PSRM-A500WFX |

✓: supported, -: not supported, △: optional

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7


Remote I/O Modules

8


Industrial I/O and Video Solutions

CPU Coolers

Intel® LGA1150/1151/1155/1156



| Model Name | 1960049408N001 | 1960047831N001 | 1960052651N021 | 1960047669N001 |
|------------------------------|---|---|--|--|
| Thermal Dispatch Performance | Intel LGA1156/1155/1150/1151 84W | Intel LGA1156/1155/1150/1151 95W | Intel LGA 1156/1155/1150/1151 80W | Intel LGA1156/1155/1150/1151 95W |
| Fan | - | 7 cm/35.5CFM 5400+/- 10% RPM | 6 cm/28.77 CFM 5800 +/- 10% RPM | 8 cm/57.5 CFM 4500+/- 10% RPM |
| Heatsink Material | Copper | Copper | Aluminum | Aluminum & Copper heart |
| Heatsink Dimensions | 85 x 85 x 26 mm (3.35" x 3.35" x 1.02") | 83 x 83 x 39.26 mm (3.27" x 3.27" x 1.54") | 90x 90x 68 mm (3.54" x 3.54" x 2.68") | 90 x 90 x 35 mm (3.54" x 3.54" x 1.38") |
| Dimensions | - | 83 x 83 x 55.73mm (3.27" x 3.27" x 2.17") | 90x 90x 68 mm (3.54" x 3.54" x 2.68") | 120 x 120 x 77 mm (4.72" x 4.72" x 3.03") |
| Weight | 611 g | 582 g | 417g | 500 g |
| Minimum Chassis Height | 1U | 2U | 2U/4U | 4U |
| Recommended Chassis | ACP-1010 HPC-7140/7180 | Backplane version of chassis | Motherboard/ backplane version of chassis | Motherboard version of chassis |
| Supported Boards | AIMB-580/701/780/781/782/784; PCE-5125/5126/5127/7127/5026 ASMB-584/585/781/782/784/785 | AIMB-580/581/582; PCE-5125/5126/5127/ 5026/7127/5128/7128 | AIMB-705/785 PCE-5029/5129/7129/3029/4129 ASMB-584/585/781/782/784/785 | AIMB-580/581/582/701/780/ 781/782/784 |



| Model Name | 1960053065N001 | 1960053207N001 |
|------------------------------|--|--|
| Thermal Dispatch Performance | Intel LGA1155/1150/1151 55W Up to Core i3 | Intel LGA1155/1150/1151 65W Up to Core i7 |
| Fan | 77 x 75 x 15.4 mm/11.83 CFM 5500+/- 10% RPM | 9 cm/45.09 CFM 4400 +/- 10% RPM |
| Heatsink Material | Copper | Aluminum & Copper |
| Heatsink Dimensions | 84 x 84 x 13 mm (3.32" x 3.32" x 0.51") | 92.9 x 92.2 x 46 mm (3.67" x 3.67" x 1.82") |
| Dimensions | 84 x 84 x 28 mm (3.32" x 3.32" x 1.11") | 92.9 x 92.2 x 46 mm (3.67" x 3.67" x 1.82") |
| Weight | 382g | 250g |
| Minimum Chassis Height | 1U | 1.5U |
| Recommended Chassis | IPC-3026, IPC-3012 | IPC-3026, IPC-3012 |
| Supported Board | PCE-3026/3028/3029/4128/4129 AIMC-3200/3201/3420/3421/3202/3422 | PCE-3026/3028/3029/4128/4129 AIMC-3200/3420/3201/3421/3202/3422 |

Intel® Xeon® LGA2011



| Part number | 1960055362N001 | 1960065684N001 | 1960063011N001 | 1960063011N011 | 1960065593N001 | 1960065591N001 | 1960057226N001 |
|---------------------------------|--|--|--|--|---|---|--|
| Thermal Dispatch Performance | Up to 145W | Up to 160W | Up to 135W | Up to 120W | Up to 135W | Up to 135W | Up to 95W |
| Fan | 6cm / 38.8CFM 6800 ± 10% RPM | 9cm/108.08CFM 5000 ± 10% RPM | 6cm/50.40CFM 9000± 10% RPM | 6cm/50.40CFM 9000+/- 10% RPM(Puller Fan) | - | - | - |
| Heatsink Material | Aluminum Fins & Cu Block with 3 Heat Pipes | Aluminum Fins & Copper base with 3 Heat Pipes | Aluminum fins soldered Copper base with Heatpipe | Aluminum fins soldered Copper base with Heatpipe | Copper with vapor chamber | Copper with vapor chamber | Aluminum fins soldered Copper base with Heatpipe |
| Heatsink Dimensions (L x W x H) | 90.0 x 90.0 x 63.9 mm (3.54" x 3.54" x 2.51") | 88.2 x 88.2 x 112.15 mm (3.47" x 3.47" x 4.41") | 107 x 70 x 64.0 mm (4.21" x 2.75" x 2.51") | 107 x 70 x 64.0 mm (4.21" x 2.75" x 2.51") | 106 x 82 x 27 mm (4.17" x 3.22" x 1.06") | 106 x 82 x 27 mm (4.17" x 3.22" x 1.06") | 90 x 90 x 25.5 mm (3.54" x 3.54" x 1") |
| Dimensions | 90.0 x 90.0 x 65.6 mm (3.54" x 3.54" x 2.58") | 88.2 x 88.2 x 112.15 mm (3.47" x 3.47" x 4.41") | 94.0 x 70.0 x 64.0 mm (3.7" x 2.75" x 2.51") | 94.0 x 70.0 x 64.0 mm (3.7" x 2.75" x 2.51") | 106 x 82 x 27 mm (4.17" x 3.22" x 1.06") | 106 x 82 x 27 mm (4.17" x 3.22" x 1.06") | 90 x 90 x 25.5 mm (3.54" x 3.54" x 1") |
| Weight | 413g | 583g | 319g | 319g | 405g | 385g | 197g |
| Minimum Chassis Height | 2U | 4U | 2U | 2U | 1U | 1U | 1U |
| Supported Boards | ASMB-823/913/920/923 | ASMB-823/913/920/923 | ASMB-822/922/813 | PCE-9228 | ASMB-822/813 & 922 (For CPU1) | ASMB-922 (For CPU0) | ASMB-823/913/920/923 |
| Remark | Square Type | Square Type | Narrow Type | Narrow Type | Narrow Type | Narrow Type | Square Type |

Intel® Xeon® LGA3647



| Part number | 1960081603N001 | 1960081155N001 |
|---------------------------------|---|---|
| Thermal Dispatch Performance | Up to 205W | Up to 165W |
| Fan | 6 cm/50.4 CFM 9000 ± 10% RPM | - |
| Heatsink Material | Aluminum Stack Fin & CU Block with heatpipe | Aluminum Stack Fin & CU Block with Heatpipe |
| Heatsink Dimensions (L x W x H) | 108 x 78 x 64 mm (4.25" x 3.07" x 2.51") | 107.75 x 78 x 25.5 mm (4.24" x 3.07" x 1") |
| Dimensions | 108 x 78 x 64 mm (4.25" x 3.07" x 2.51") | 107.75 x 78 x 25.5 mm (4.24" x 3.07" x 1") |
| Weight | 464g | 257.6g |
| Minimum Chassis Height | 2U | 1U |
| Supported Boards | ASMB-815/825/925/975 | ASMB-815/825/925/975 |
| Remark | Narrow Type | Narrow Type |

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O Modules

8

Industrial I/O and Video Solutions

Accessories

Slide Rail



For 1U rackmount chassis

- 26" P/N: 9680009153
- Maximum acceptable load: 25kg
- 1 pair included



For 2U and higher rackmount chassis

- 26" P/N: 9680006905
- Maximum acceptable load: 45kg
- 1 pair included

Industrial Disk Tray/Bay



IPC-DT-5121/ IPC-DT-5121B

Shockproof industrial hard disk drive tray with cooling fan and optional front USB and PS/2 interfaces

- Accepted Device: 1 x 3.5" HDD (only for 9.5mm thickness)
- Cooling Fan: 1 x 4 cm
- Color (Codes): Gray (414U), Black (4C2X)
- Dimensions (W x H x D): 148.5 x 42.6 x 171 mm³ (5.84" x 1.67" x 6.73")



989K008733

A frame to securely fix a 3.5" HDD in a 5.25" drive bay

- Accepted Device: 3.5" HDD x 1



IPC-DT-3120E

Mobile rack for converting a 3.5" drive bay to dual 2.5" SATA HDD/SSD trays

- Accepted Device: 2 x 2.5" SATA HDD/SSD (only for HDD/SSD thickness less than 9.6 mm)
- Dimensions (W x H x D): 101.6 x 25.4 x 139 mm³ (4" x 1" x 5.47")



989K008734

A frame to securely fix two 2.5" HDDs/SSDs in a 3.5" drive bay

- Accepted Device: 2.5" SATA HDD/SSD x 2 (only for HDD thickness less than 9.6 mm)



9892200013E

Module to convert a 5.25" drive bay to a slim ODD and a 3.5" drive bay

- Accepted Device: 3.5" device x 1, slim ODD x 1



96RACK-5SS-CAGE-CR

Mobile rack for converting one 5.25" drive bay to four 2.5" SAS/SATA HDD/SSD trays

- Accepted Device: 2.5" SAS/SATA HDD/SSD x 4
- Dimension (W x H x D): 146 x 41 x 170 mm³ (5.74" x 1.61" x 6.69")



IPC-DT-5230E

Mobile rack for converting dual 5.25" drive bays to three 3.5" SATA HDD trays

- Accepted Device: 3.5" SATA HDD x 3 or 2.5" SATA HDD/SSD x 3
- Cooling Fan: 1 x 8 cm
- Dimensions (W x H x D): 146.5 x 86 x 225 mm³ (5.76" x 3.38" x 8.85")



96RACK-5-SS-CR-B2

Mobile rack for converting one 5.25" drive bay to one slim ODD and two 2.5" SAS/SATA HDD/SSD trays

- Accepted Device: slim ODD x 1, 2.5" SAS/SATA HDD/SSD x 2
- Dimension (W x H x D): 146 x 41.3 x 170 mm³ (5.74" x 1.62" x 6.69")

Add-on Card Hold Down Kit



98RKBTS09E

Add-on card hold down kit (short)

- Bracket Q'ty of each kit : 5 pcs
- For PCI add-on card with height 72.3mm ~ 87.3mm and PCIe add-on card with height 81.7mm ~ 91.8mm



98RKBTS10E

Add-on card hold down kit (long)

- Bracket Q'ty of each kit : 5 pcs
- For PCI add-on card with height 54.8mm ~ 75.7mm and PCIe add-on card with height 59.3mm ~ 80.2mm

USB Cables



| Part Number | 1700008461 | 1700003195 | 1700002204 | 1700014398 | 1700020277-01 |
|--------------|--------------------------------------|----------------------------|----------------------------|----------------------------|---|
| Description | USB 2.0 cable with 4 ports | USB 2.0 cable with 2 ports | USB 2.0 cable with 2 ports | USB 2.0 cable with 4 ports | USB 3.0 cable with 2 ports |
| Cable Length | 30.5 cm (12.01") | 17.5 cm (6.89") | 27 cm (11.92") | 30.5 cm (12.01") | 30 cm (11.81") |
| Remark | For ATX/Micro-ATX MB, full-sized SBC | | | For half-sized SBC | For ATX/Micro-ATX MB, full/half-sized SBC |

SATA Cables



| Part Number | 96CB-SATAPOWER-6P2 | 1700022749-11 | 1700019381 | 1700007351 | 1700003194 |
|--------------|--|---|--|--|---|
| Description | SATA power cable for slim ODD | SATA power cable for HDD/SSD | SATA data cable (right angle) | SATA data cable (right angle) | SATA data cable |
| Cable Length | 10 cm (3.94") | 10 cm (3.94") | 55 cm (21.65") | 40 cm (15.75") | 60 cm (23.62") |
| Remark | Big 4 P to SATA power cable for Slim ODD | Big 4 P to SATA power cable for HDD/SSD | SATA data cable with 1 right angle and 1 vertical connectors | SATA data cable with 1 right angle and 1 vertical connectors | SATA data cable with vertical connectors with locks |

COM and Printer Ports Cables



| Part Number | 1701092300 | 1701090401 | 1700020294-01 | 1700008762 |
|--------------|--------------------------------------|-----------------------|--------------------------------------|------------------------|
| Description | COM cable with 2 ports | COM cable with 1 port | Printer (Parallel) port cable | COM cable with 2 ports |
| Cable Length | 28.5 cm (11.22") | 40 cm (15.75") | 42.0 cm (16.54") | 22.5 cm (8.86") |
| Remark | For ATX/Micro-ATX MB, full-sized SBC | | For ATX/Micro-ATX MB, full-sized SBC | For half-sized SBC |

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O Modules

8

Industrial I/O and Video Solutions

Accessories

Video Cables



| Part Number | PCE-DP10-00A1E | 1700021831-01 | 1700008822-11 |
|--------------|---|---|--|
| Description | Display port cable | DP to DVI port cable | DVI to DVI port cable |
| Cable Length | 25 cm (9.84") | 30 cm (11.81") | 30 cm (11.81") |
| Remark | Video cable for converting on board DP connector to external DP port supporting DP 1.1a/1.2 signaling | Video cable for converting on board DP connector to external DVI-D port | Video cable for converting on board DVI connector to external DVI-D port |

Other Cables



| Part Number | 1700006915 | 1700006916 | 1700024754-01 |
|--------------|---|---------------------------------------|---|
| Description | Cable for ACP-4000MB front LED board | Cable for IPC-610MB-H front LED board | Power cable for GPU card |
| Cable Length | 60 cm (23.62") | 60 cm (23.62") | 10 cm (3.93") |
| Remark | For those Advantech motherboards with VOLT1 connector too far away from the chassis LED board | | 2*B4P Molex power connector to 6+2P PCIe power cable for GPU card |

4

Intelligent HMI and Monitors

- 4-4 Modular Panel PC
- 4-5 High-Performance Control Panels
- 4-7 Thin-Client Terminals
- 4-9 Domain-Focused
- 4-10 Industrial Operator Panel
- 4-11 Industrial Monitors
- 4-14 General Panel PC



Introduction

To facilitate data visualization in Industry 4.0 applications, Advantech offers a diverse range of rugged and reliable HMI products of varying size (from 3.5" to 21.5") and screen ratio (4:3 and 16:9). Our HMI product categories include high-performance control panels that can be embedded into equipment and machines, low-power industrial thin clients for process monitoring, web terminals for next-generation smart factory applications, and standard industrial monitors. In addition to standard products, Advantech also provides customized domain-focused products to satisfy the needs of specific industries.

All Advantech HMI products are equipped with relevant software (WebAccess/HMI, WebAccess/SCADA or WISE-PaaS/RMM) as well as Advantech's iDOOR technology, making them suitable for various applications.



Product Categories

Modular Series

In response to ongoing advances in Industry 4.0, Advantech has created its new series of modular panel PC solutions based on three performance-segmented modules — a control panel, industrial thin-client, and industrial monitor. The modular design of our solutions allows the computing box modules to be interchangeably combined with our display modules to provide comprehensive platform solutions for specific field applications. This modularization offers many advantages, including flexible configuration, rapid integration and deployment, reduced system downtime and maintenance costs, and support for future expansion.

Control Panel

Advantech's control panel series of PC-based open control platforms feature a high-performance, fanless design and can be integrated with a wide variety of machines in diverse environments to support complex machine control tasks and data visualization applications. The optimized design includes three Gigabit LANs that support multiple fieldbus communication protocols, an IP66-rated front panel that protects against dust and water ingress, and support for flexible iDOOR and PCIe expansion, making these platforms particularly ideal for industrial automation control operations.

Thin Client Terminals

Advantech's thin client modules feature a compact, fanless, and low-power design that supports multiple aspect ratios (4:3 and 16:9) and allows the modules to be equipped with a range of display sizes (5.7" to 21.5"). These thin client modules are primarily deployed as manufacturing execution systems (MESs) or for work flow monitoring and production process visualization. Under the Industry 4.0 trend, thin clients are widely utilized in distributed control architectures because of their easy deployment and suitability for the centralized management of devices and information. This architecture allows the OS to be quickly dispatched from server to client following a hardware replacement while still ensuring data security.

Operator Panel

With SCADA software moving toward cloud-based applications, simple web-based terminals with HTML5 browser support have become an economical option for process monitoring. Advantech's WebOP series of operator panels feature a range of display sizes (7" to 12") and support multiple communication interfaces (e.g., RS-232/422/485, Ethernet, and USB). Bundled with WebAccess/HMI software, Advantech's WebOP series supports over 450 PLC communication protocols, ensuring convenient integration with equipment made by a comprehensive range of manufacturers.

Domain Focused

In addition to standard products, Advantech provides domain-focused systems with customizable features designed to satisfy specific requirements across various vertical markets. Verified with ATEX Class 1 Division 2/EN 50155 certification, Advantech's domain-focused rugged HMIs are sufficiently robust for operation in extreme environments typical of the locomotive, food and beverage, oil and gas, and machine tool manufacturing industries. Ensuring system flexibility and compatibility are also major focus points for Advantech when designing domain-focused HMI products.

Industrial Monitors

Independent controllers and industrial PCs embedded in machines require an interface for data processing and visualization, for which Advantech produces industrial monitors in a range of sizes (6", 12.1", 15", 17", 18.5", to 21.5"). Featuring an industrial-grade LED LCD with a backlight lifetime of 50,000 hours, high IP-rated bezel, and wide temperature support, our industrial monitors are equipped to withstand operation in harsh environments. Versatile mounting options (panel, wall, desktop, rack, and VESA arm) are also supported to ensure easy installation for various usage scenarios.



Modular Panel PCs

Panel Module



| P/N | FPM-D12T-AE | FPM-D15T-AE | FPM-D17T-AE | FPM-D18W-AE | FPM-D21W-AE |
|---------------|------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| Panel Size | 12" | 15" | 17" | 18.5" | 21.5" |
| Resolution | 1024 x 768 | 1024 x 768 | 1280 x 1024 | 1366 x 768 | 1920 x 1080 |
| Touch | 5-wire resistive touch | Projected capacitive touch | Projected capacitive touch | Projected capacitive touch | Projected capacitive touch |
| Wi-Fi Antenna | - | ✓ | ✓ | ✓ | ✓ |
| NFC Reader | - | △ | △ | △ | △ |
| IP Rating | IP66-rated front panel | IP66-rated front panel | IP66-rated front panel | IP66-rated front panel | IP66-rated front panel |

Box Module

Coming Soon



| P/N | TPC-B200-E12AE | TPC-B200-J12AE | TPC-B500-633AE | TPC-B500-653AE | TPC-B500-6C2AE | TPC-B500-673AE |
|------------------|---|---|--|--|--|--|
| CPU | Intel® Atom® E3940 Processor | Intel® Celeron® J3455 Processor | Intel® Core™ i3-6100U | Intel® Core™ i5-6300U | Intel® Celeron 3955U | Intel® Core™ i7-6600U |
| Memory | 4 GB DDR3L 1600 MHz SO-DIMM | 4 GB DDR3L 1600 MHz SO-DIMM | 8 GB DDR4 2133 MHz SO-DIMM | 8 GB DDR4 2133 MHz SO-DIMM | 4 GB DDR4 2133 MHz SO-DIMM | 8 GB DDR4 2133 MHz SO-DIMM |
| I/O | 2 x RS-232/422/485, 2 x USB 3.0, 2 x USB 2.0, 2 x GbE, 1 x Line Out, 1 x DP | 2 x RS-232/422/485, 2 x USB 3.0, 2 x USB 2.0, 2 x GbE, 1 x Line Out, 1 x DP | 1 x RS-232, 1 x RS-232/422/485, 2 x USB 3.0, 2 x USB 2.0, 3 x GbE, 1 x Line Out, 1 x DP | 1 x RS-232, 1 x RS-232/422/485, 2 x USB 3.0, 2 x USB 2.0, 3 x GbE, 1 x Line Out, 1 x DP | 1 x RS-232, 1 x RS-232/422/485, 2 x USB 3.0, 2 x USB 2.0, 3 x GbE, 1 x Line Out, 1 x DP | 1 x RS-232, 1 x RS-232/422/485, 2 x USB 3.0, 2 x USB 2.0, 3 x GbE, 1 x Line Out, 1 x DP |
| Expansion | 1 x Full-size mini PCIe | 1 x Full-size mini PCIe | 1 x Half-size PCIe, 2 x full-size mini PCIe | 1 x Half-size PCIe, 2 x full-size mini PCIe | 1 x Half-size PCIe, 2 x full-size mini PCIe | 1 x Half-size PCIe, 2 x full-size mini PCIe |
| Power Input | 24 V _{DC} ± 20% | 24 V _{DC} ± 20% | 24 V _{DC} ± 20% | 24 V _{DC} ± 20% | 24 V _{DC} ± 20% | 24 V _{DC} ± 20% |
| Operating System | Microsoft® Windows 10 IoT Enterprise LTSC | Microsoft® Windows 10 IoT Enterprise LTSC | Microsoft® Windows WES7 (32/64-bit), Windows 7 (32/64-bit), Ubuntu 16.04, Windows 10 IoT Enterprise LTSC | Microsoft® Windows WES7 (32/64-bit), Windows 7 (32/64-bit), Ubuntu 16.04, Windows 10 IoT Enterprise LTSC | Microsoft® Windows WES7 (32/64-bit), Windows 7 (32/64-bit), Ubuntu 16.04, Windows 10 IoT Enterprise LTSC | Microsoft® Windows WES7 (32/64-bit), Windows 7 (32/64-bit), Ubuntu 16.04, Windows 10 IoT Enterprise LTSC |
| Mount Options | Panel, stand, and VESA mount (with optional mounting kit) | Panel, stand, and VESA mount (with optional mounting kit) | Panel, stand, and VESA mount (with optional mounting kit) | Panel, stand, and VESA mount (with optional mounting kit) | Panel, stand, and VESA mount (with optional mounting kit) | Panel, stand, and VESA mount (with optional mounting kit) |

Monitor Box Modules



| P/N | FPM-B700-AE |
|---------------------------|------------------------------|
| Video Interface Available | HDMI, DP, DVI, VGA, iLink |
| Power Input | 24 V _{DC} ± 20% |
| Mount Options | Panel, stand, and VESA mount |
| iLINK Technology | Supported |

High-Performance Control Panels



| Model | | TPC-1881WP | TPC-1581WP |
|--------------------------|-----------------------------|---|---|
| CPU | | 4th Gen. Intel® Core™ i7/i3 Processor | 4th Gen. Intel® Core™ i3 Processor |
| Memory | | 4 GB DDR3L | 4 GB DDR3L |
| | | 1600 MHz SO-DIMM | 1600 MHz SO-DIMM |
| | | SDRAM | SDRAM |
| Display | Display Type | TFT LED LCD | TFT LED LCD |
| | Display Size | 18.5" | 15.6" |
| | Max. Resolution | 1366 x 768 | 1366 x 768 |
| | Max. Colors | 16.7M | 16.7M |
| | Luminance cd/m ² | 300 nits | 300 nits |
| | VieWING Angle (H/V°) | 170/160 | 170/160 |
| | Backlight MTBF | 50,000 hr | 50,000 hr |
| | | Touchscreen | Projected capacitive touch |
| Network (LAN) | | 10/100/1000BASE-T x 2 | 10/100/1000BASE-T x 2 |
| I/O Ports | | RS-232/422/485 x 1 USB 3.0 x 2, HDMI 1.4 x 1 Audio line out x 1, USB 2.0 x 1 (Δ) Audio MIC x 1 (Δ) | RS-232/422/485 x 1 USB 3.0 x 2, HDMI 1.4 x 1 Audio line out x 1, USB 2.0 x 1 (Δ) Audio MIC x 1 (Δ) |
| HDD (Optional) | | 2.5" SATA HDD | 2.5" SATA HDD |
| Intelligent Keys | | Quick access through built-in front bezel function and home key button | Quick access through built-in front bezel function and home key button |
| CompactFlash Slots | | CFast slot x 1 | CFast slot x 1 |
| Expansion Slots | | Full-size mini PCIe | Full-size mini PCIe |
| Digital Input/Output | | - | - |
| Ingress Protection | | Front panel: IP66 | Front panel: IP66 |
| DC Power Input (Voltage) | | 24 V _{DC} ± 20% | 24 V _{DC} ± 20% |
| Enclosure | | Front bezel: Die cast aluminum alloy Back housing: PC/ABS resin | Front bezel: Die cast aluminum alloy Back housing: PC/ABS resin |
| Mounting | | Panel mount | Panel mount |
| Weight | | 6 kg (13.22 lb) | 7 kg (15.44 lb) |
| Operating Temperature | | 0 ~ 55°C (32 ~ 131°F) | 0 ~ 55°C (32 ~ 131°F) |
| Dimensions | | 488.1 x 309.1 x 56.7 mm (19.2" x 12.2" x 2.2") | 419.7 x 269 x 56.7 mm (16.52" x 10.59" x 2.23") |
| Certification | | BSMI, CCC, CE, FCC Class A, UL | BSMI, CCC, CE, FCC Class A, UL |
| Operating System | | Windows 7/8, WES7, WEC7, Linux, Windows 10 Enterprise LTSB | Windows 7/8, WES7, WEC7, Linux, Windows 10 Enterprise LTSB |

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O Modules

8

Industrial I/O and Video Solutions

High-Performance Control Panels



| Model | | TPC-1782H | TPC-1582H | TPC-1282T |
|--------------------------|-----------------------------|---|---|---|
| CPU | | 4th Gen. Intel® Core™ i7/i3 Processor | 4th Gen. Intel® Core™ i3 Processor | 5th Gen. Intel® Core™ i3 Processor |
| Memory | | 4 GB DDR3L | 4 GB DDR3L | 4 GB DDR3L |
| | | 1600 MHz SO-DIMM | 1600 MHz SO-DIMM | 1600 MHz SO-DIMM |
| | | SDRAM | SDRAM | SDRAM |
| Display | Display Type | TFT LED LCD | TFT LED LCD | TFT LED LCD |
| | Display Size | 17" | 15" | 12.1" |
| | Max. Resolution | 1280 x 1024 | 1024 x 768 | 1024 x 768 |
| | Max. Colors | 16.7M | 16.2M | 16.2M |
| | Luminance cd/m ² | 350 nits | 400 nits | 600 nits |
| | VieWIng Angle (H/V°) | 170/160 | 160/140 | 160/140 |
| Backlight MTBF | | 50,000 hr | 50,000 hr | 50,000 hr |
| Touchscreen | | Resistive | Resistive | Resistive |
| Network (LAN) | | 10/100/1000BASE-T x 2 | 10/100/1000BASE-T x 2 | 10/100/1000BASE-T x 2 |
| I/O Ports | | RS-232/422/485 x 1 USB 3.0 x 2, HDMI 1.4 x 1 Audio line out x 1, USB 2.0 x 1 (Δ) Audio MIC x 1 (Δ) | RS-232/422/485 x 1 USB 3.0 x 2, HDMI 1.4 x 1 Audio line out x 1, USB 2.0 x 1 (Δ) Audio MIC x 1 (Δ) | RS-232/422/485 x 1 USB 3.0 x 2, HDMI 1.4 x 1 Audio line out x 1, USB 2.0 x 1 (Δ) Audio MIC x 1 (Δ) |
| HDD (Optional) | | 2.5" SATA HDD | 2.5" SATA HDD | 2.5" SATA HDD |
| Intelligent Keys | | - | - | - |
| CompactFlash Slots | | CFast slot x 1 | CFast slot x 1 | CFast slot x 1 |
| Expansion Slots | | Full-size mini PCIe/half-size PCIe | Full-size mini PCIe/half-size PCIe | Full-size mini PCIe/half-size PCIe |
| Digital Input/Output | | - | - | - |
| Ingress Protection | | Front panel: IP65 | Front panel: IP65 | Front panel: IP66 |
| DC Power Input (Voltage) | | 24 V _{DC} ± 20% | 24 V _{DC} ± 20% | 24 V _{DC} ± 20% |
| Enclosure | | Front bezel: Die cast aluminum alloy Back housing: PC/ABS resin | Front bezel: Die cast aluminum alloy Back housing: PC/ABS resin | Front bezel: Die cast aluminum alloy Back housing: PC/ABS resin |
| Mounting | | Desktop, Wall or Panel Mount | Desktop, Wall or Panel Mount | Desktop, Wall or Panel Mount |
| Weight | | 6 kg (13.23 lb) | 5.5 kg (12.13 lb) | 3.2 kg (7.02 lb) |
| Operating Temperature | | 0 ~ 55°C (32 ~ 131°F) | 0 ~ 55°C (32 ~ 131°F) | 0 ~ 55°C (32 ~ 131°F) |
| Dimensions | | 414 x 347.5 x 84 mm (16.3" x 13.68" x 3.31") | 383 x 307 x 78.5 mm (15.08" x 12.09" x 3.09") | 311.8 x 238 x 77.2 mm (12.28" x 9.38" x 3.04") |
| Certification | | BSMI, CCC, CE, FCC Class A, UL | BSMI, CCC, CE, FCC Class A, UL | BSMI, CCC, CE, FCC Class A, UL |
| Operating System | | Windows 7/8, WES7, WEC7, Linux, Windows 10 Enterprise LTSB | Windows 7/8, WES7, WEC7, Linux, Windows 10 Enterprise LTSB | Windows 7/8, WES7, WEC7, Linux, Windows 10 Enterprise LTSB |

Industrial Thin-Client Terminals



| Model | | TPC-1840WP | TPC-1751T | | TPC-1551WP |
|----------------------------------|-----------------------------|--|---|---|---|
| CPU | | AMD G-series T56E 1.65GHz | Intel® Atom™ E3827 1.75 GHz Processor | Intel® Celeron® J1900 2.0 GHz Processor | Intel® Atom™ E3827 1.75 GHz Processor |
| Memory | | 4 GB (Optional 8 GB) DDR3L 1600 MHz SO-DIMM SDRAM | 4 GB (Optional 8 GB) DDR3L 1600 MHz SO-DIMM SDRAM | 4 GB (Optional 8 GB) DDR3L 1600 MHz SO-DIMM SDRAM | 4 GB (Optional 8 GB) DDR3L 1600 MHz SO-DIMM SDRAM |
| Display | Display Type | HD TFT LED LCD | SXGA TFT LED LCD | WXGA TFT LED LCD | |
| | Display Size | 18.5" | 17" | 15.6" | |
| | Max. Resolution | 1366 x 768 | 1280 x 1024 | 1366 x 768 | |
| | Max. Colors | 16.7M | 16.7M | 16.7M | |
| | Luminance cd/m ² | 300 nits | 350 nits | 400 nits | |
| | VieWIng Angle (H/V°) | 170/160 | 160/140 | 170/160 | |
| | Backlight MTBF | 50,000 hr | 50,000 hr | 50,000 hr | |
| Touchscreen | | Projected capacitive | Resistive | Projected capacitive | |
| HDD (Optional) | | 2.5" SATA x 1 | via optional kit | via optional kit | |
| Network (LAN) | | 10/100/1000BASE-T x 2 | 10/100/1000BASE-T x 2 | 10/100/1000BASE-T x 2 | |
| I/O Ports | | RS-232 x 3 RS-232/422/485 x 1 - USB 2.0 x 2 | RS-232 x 1, RS-232/422/485 x 1 USB 3.0 x 1 USB 2.0 x 1 | RS-232 x 1, RS-232/422/485 x 1 USB 3.0 x 1 USB 2.0 x 1 | |
| CompactFlash Slots | | - | CFast slot x 1 | CFast slot x 1 | |
| Expansion Slots | | Full-size mini PCIe | Full-size mini PCIe | Full-size mini PCIe | |
| DC Power Input (Voltage) | | 24 V _{DC} ± 20% | 24 V _{DC} ± 20% | 24 V _{DC} ± 20% | |
| Dimensions | | 488 x 309 x 56.7 mm (19.21" x 12.17" x 2.23") | 413.7 x 347.2 x 63.8 mm (16.28" x 13.68" x 2.5") | 419.7 x 269 x 61.9 mm (16.52" x 10.59" x 2.44") | |
| Weight | | 7 kg | 6 kg | 5 kg | |
| Front cover | | Front bezel: Die cast aluminum alloy | Front bezel: Die cast aluminum alloy | Front bezel: Die cast aluminum alloy | |
| Operating Temperature | | 0 ~ 55°C (32 ~ 131°F) | -20 ~ 60°C (-4 ~ 140°F) | 0 ~ 55°C (32 ~ 131°F) | |
| Ingress Protection (Front Panel) | | IP66 | IP66 | IP66 | |
| Certification | | BSMI, CCC, CE | BSMI, CCC, CE | BSMI, CCC, CE | |
| | | FCC Class A, UL | FCC Class A, UL, KCC | FCC Class A, UL | |
| Operating System | | Windows 7, WES7 | Windows 7, WES7, WEC7, Linux, Windows 10 Enterprise LTSB | Windows 7, WES7, WEC7, Linux, Windows 10 Enterprise LTSB | |

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O Modules

8

Industrial I/O and Video Solutions

Industrial Thin-Client Terminals



| Model | | TPC-1551T | TPC-1251T | TPC-1051WP | TPC-651T |
|----------------------------------|-----------------------------|---|---|---|---|
| CPU | | Intel® Atom™ E3827 1.75 GHz Processor | Intel® Atom™ E3827 1.75 GHz Processor | Intel® Atom™ E3827 1.75 GHz Processor | Intel® Atom™ E3827 1.75 GHz Processor |
| Memory | | 4 GB (Optional 8 GB) DDR3L 1600 MHz SO-DIMM SDRAM | 4 GB (Optional 8 GB) DDR3L 1600 MHz SO-DIMM SDRAM | 4 GB (Optional 8 GB) DDR3L 1600 MHz SO-DIMM SDRAM | 4 GB (Optional 8 GB) DDR3L 1600 MHz SO-DIMM SDRAM |
| Display | Display Type | XGA TFT LED LCD | XGA TFT LED LCD | WXGA TFT LED LCD | VGA TFT LED LCD |
| | Display Size | 15" | 12.1" | 10.1" | 5.7"/6.5" |
| | Max. Resolution | 1024 x 768 | 1024 x 768 | 1280 x 800 | 640 x 480 |
| | Max. Colors | 16.7M | 16.2M | 262K | 262K |
| | Luminance cd/m ² | 400 nits | 600 nits | 300 nits | 550/800 nits |
| | VieWIng Angle (H/V°) | 160/140 | 160/140 | 170/170 | 160/140 |
| | Backlight MTBF | 50,000 hr | 50,000 hr | 25,000 hr | 50,000 hr |
| Touchscreen | | Resistive | Resistive | Projected capacitive | Resistive |
| HDD (Optional) | | 2.5" SATA x 1 | 2.5" SATA x 1 | 2.5" SATA x 1 | 2.5" SATA x 1 |
| Network (LAN) | | 10/100/1000BASE-T x 2 | 10/100/1000BASE-T x 2 | 10/100/1000BASE-T x 2 | 10/100/1000BASE-T x 2 |
| I/O Ports | | RS-232 x 1, RS-232/422/485 x 1 USB 3.0 x 1 USB 2.0 x 1 | RS-232 x 1, RS-232/422/485 x 1 USB 3.0 x 1 USB 2.0 x 1 | RS-232 x 1, RS-232/422/485 x 1 USB 3.0 x 1 USB 2.0 x 1 | RS-232 x 1, RS-232/422/485 x 1 USB 3.0 x 1 USB 2.0 x 1 |
| CompactFlash Slots | | CFast slot x 1 | CFast slot x 1 | CFast slot x 1 | CFast slot x 1 |
| Expansion Slots | | Full-size mini PCIe | Full-size mini PCIe | Full-size mini PCIe | Full-size mini PCIe |
| DC Power Input (Voltage) | | 24 V _{DC} ± 20% | 24 V _{DC} ± 20% | 24 V _{DC} ± 20% | 24 V _{DC} ± 20% |
| Dimensions | | 383.20 x 307.30 x 61.10 mm (15.09" x 12.10" x 2.41") | 311.80 x 238 x 57.2 mm (12.28" x 9.37" x 2.25") | 283.1 x 202.3 x 61.4 mm (11.15" x 7.96" x 2.42") | 199 x 152 x 58.9 mm (7.83" x 5.98" x 2.32") |
| Weight | | 3.9 kg | 2.6 kg | 2.6 kg | 1.5 kg |
| Front cover | | Front bezel: Die cast aluminum alloy | Front bezel: Die cast aluminum alloy | Front bezel: Die cast aluminum alloy | Front bezel: Die cast aluminum alloy |
| Operating Temperature | | -20 ~ 60°C (-4 ~ 140°F) | -20 ~ 60°C (-4 ~ 140°F) | -20 ~ 55°C (-4 ~ 131°F) | -20 ~ 60°C (-4 ~ 140°F) |
| Ingress Protection (Front Panel) | | IP66 | IP66 | IP66 | IP66 |
| Certification | | BSMI, CCC, CE | BSMI, CCC, CE | BSMI, CCC, CE | BSMI, CCC, CE |
| | | FCC Class A, UL, KCC | FCC Class A, UL, KCC | FCC Class A, UL | FCC Class A, UL |
| Operating System | | Windows 7, WES7, WEC7, Linux, Windows 10 Enterprise LTSB | Windows 7, WES7, WEC7, Linux, Windows 10 Enterprise LTSB | Windows 7, WES7, WEC7, Linux, Windows 10 Enterprise LTSB | Windows 7, WES7, WEC7, Linux, Windows 10 Enterprise LTSB |

Domain-Focused



| Model | | IPPC-5211WS | SPC-2140WP/1840WP | SPC-1881WP | FPM-8151H | TPC-8151WM | TPC-8191WM |
|--------------------------|-----------------------------|--|--|--|--|--|--|
| CPU | | Intel Celeron J1900 | AMD T56N | Intel® Core™ i7/ i5 / i3 Processor | - | Intel Celeron CPU G3900TE @ 2.30 GHz | Intel Celeron CPU G3900TE @ 2.30 GHz |
| Memory | | 4 GB DDR3L SDRAM | 4 GB DDR3L SDRAM | 4 GB DDR3L SDRAM | - | 4 GB DDR3L SDRAM | 4 GB DDR3L SDRAM |
| Display | Display Type | TFT LED LCD | TFT LED LCD | TFT LED LCD | TFT LED LCD | TFT LED LCD | TFT LED LCD |
| | Display Size | 21.5" | 21.5" / 18.5" | 18.5" | 15" | 15.6" | 19.5" |
| | Max. Resolution | 1920 x 1080 | 21.5": 1920 x 1080 18.5": 1366 x 768 | 1366 x 768 | 1024 x 768 | 1366 x 768 | 1600 x 900 |
| | Max. Colors | 16.7M | 16.7M | 16.7M | 16.2M | 16.7M | 16.7M |
| | Luminance cd/m ² | 300 nits | 300 nits | 300 nits | 350 nits | 300 nits | 250 nits |
| | Viewing Angle (H/V°) | 178/178 | 21.5": 178/178 18.5": 170/160 | 170/160 | 160/140 | 80 (left), 80 (right), 80 (up), 80 (down) | 85 (left), 85 (right), 80 (up), 80 (down) |
| | Backlight MTBF | 50,000 hr | 50,000 hr | 50,000 hr | 50,000 hr | 70,000 hr | 30,000 hr |
| | Touchscreen | Projected capacitive touch | Projected capacitive touch | Projected capacitive touch | Resistive | Projected capacitive touch | Projected capacitive touch |
| Network (LAN) | | 10/100/1000BASE-T x 2 | 10/100/1000BASE-T x 2 | 10/100/1000BASE-T x 2 | - | 10/100/1000BASE-T x 1 | 10/100/1000BASE-T x 1 |
| I/O Ports | | RS-232/422/485 x 1 RS-232 x 1 USB 3.0 x 1 | RS-232 x1 (connection:M12 A-coded, 8-pin male) USB 2.0 x1 (connection:M12 A-coded, 8-pin female) 24 V _{DC} power input (connection:M12 A-coded, 5-pin male) | RS-232 x1 (connection:M12 A-coded, 8-pin male) USB 2.0 x1 (connection:M12 A-coded, 8-pin female) 24 V _{DC} power input (connection:M12 A-coded, 5-pin male) | VGA DVI-D | USB 3.0 x 3 (rear) USB 2.0 x 1 (rear) USB 3.0 x 1 (front) | USB 3.0 x 3 (rear) USB 2.0 x 1 (rear) USB 3.0 x 1 (front) |
| HDD (Optional) | | 2.5" SATA HDD | 2.5" SATA HDD | 2.5" SATA HDD | - | 2.5" SATA HDD | 2.5" SATA HDD |
| Expansion Slots | | Full-size mini PCIe x1 | Full-size mini PCIe x1 | Full-size mini PCIe x1 | - | - | - |
| Digital | | - | - | - | - | - | - |
| Input/Output | | - | - | - | - | - | - |
| Ingress Protection | | All-Around IP69k | All-Around IP66 | All-Around IP66 | Front IP66 | - | - |
| DC Power Input (Voltage) | | 24 V _{DC} ± 20% | 24 V _{DC} ± 20% | 24 V _{DC} ± 20% | 24 V _{DC} ± 20% / 12 V _{DC} /4.75A | 19 V _{DC} | 19 V _{DC} |
| Enclosure | | Front bezel: Stainless steel Back housing: Aluminum/stainless steel | Front bezel: Die cast aluminum alloy Back housing: Die cast aluminum alloy | Front bezel: Die cast aluminum alloy Back housing: Die cast aluminum alloy | Front bezel: 316L stainless steel Back housing: Stainless steel | Front bezel: Die cast aluminum alloy Back housing: PC/ABS resin | Front bezel: Die cast aluminum alloy Back housing: PC/ABS resin |
| Mounting | | VESA and flange adapter for arm and foot mount | VESA | VESA | VESA / Panel Mount | Desktop, Wall or VESA Mount | Desktop, Wall or VESA Mount |
| Weight | | 16 kg | 9 kg | 9 kg | 8.5 kg | 4.4 kg | 5.5 kg |
| Operating Temperature | | 0 ~ 50°C (32 ~ 122°F) | 0 ~ 55°C (32 ~ 131°F) | 0 ~ 55°C (32 ~ 131°F) | -20 ~ 60°C (-4 ~ 140°F) | 0 ~ 40°C (32 ~ 130°F) | 0 ~ 40°C (32 ~ 130°F) |
| Dimensions | | 555 x 346.5 x 81 mm | 21.5": 558.4 x 349.8 x 65 mm 18.5": 488 x 309 x 65 mm | 488 x 309 x 65 mm | 414 x 347.5 x 84 mm | 400.74 x 241 x 78.5 mm | 510 x 291 x 66 mm |
| Certification | | BSMI, CCC, CE, FCC Class A, UL | BSMI, CCC, CE, FCC Class A, UL | BSMI, CCC, CE, FCC Class A, UL | BSMI, CCC, CE, FCC Class A, UL | CCC, CE, FCC Class A, UL | CCC, CE, FCC Class A, UL |
| Operating System | | Windows 7/8, WES7, WEC7, Linux, Windows 10 Enterprise LTSB | Windows 7/8, WES7, WEC7, Linux | Windows 7/8, WES7, WEC7, Linux, Windows 10 Enterprise LTSB | Windows 7/8, WES7, WEC7, Linux, Windows 10 Enterprise LTSB | WIN 10 Enterprise LTSB | WIN 10 Enterprise LTSB |

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O Modules

8

Industrial I/O and Video Solutions

Industrial Operator Panel



| Model | | WOP-3070T | WOP-3100T | WOP-3120T | WOP-2040T | | WOP-2070T | | WOP-2100T | |
|-------------------------------|----------------------|---|---|---|---|-----------------|--|------------------------|--|-----------------|
| Ordering Information | | WOP-3070T-C4BE | WOP-3100T-C4BE | WOP-3120T-C4AE | WOP-2040T-S1AE | WOP-2040T-N1AE | WOP-2070T-S2AE | WOP-2070T-N2AE | WOP-2100T-S2AE | WOP-2100T-N2AE |
| CPU | | RISC 32 bits, 600 MHz (ARM® Cortex™-A8) | ARM Cortex A8 600Mhz | ARM Cortex A8 600Mhz | RISC (32-bit, 200 MHz) | | | RISC (32-bit, 200 MHz) | | |
| Backup Memory | | 128 KB | 128 KB | FRAM 1M bit (=128K Byte, 64 word) | 128 KB | | | 128 KB | | |
| Working Memory | | DDR2 256M Bytes | DDR2 256 MB on board | DDR2 256 MB on board | 32 MB SDRAM | | 64 MB SDRAM | | 64 MB SDRAM | |
| Storage | | 512MB on board SLC type | 512MB on board SLC type | 512MB on board SLC type | 8MB NOR Flash | | 8 MB NOR Flash | | | |
| | | - | - | - | - | 128M NAND Flash | - | 128M NAND Flash | - | 128M NAND Flash |
| Operating System | | Microsoft® Windows CE 6.0 | Microsoft® Windows CE 6.0 | Microsoft® Windows CE 6.0 | HMI RTOS, WebOP Designer 2.0 | | HMI RTOS, WebOP Designer 2.0 | | | |
| Display | Type | WVGA (16:9) TFT LCD | WSGA (17:10) TFT LCD | XGA (16:9) TFT LCD | WQVGA (16:9) TFT LCD | | WVGA (16:9) TFT LCD | | WSVGA (16:9) TFT LCD | |
| | Size | 7" | 10.1" | 12" | 4.3" | | 7" | | 10.1" | |
| | Max. Resolution | 800 x 480 | 1024 x 600 | 1024 x 768 | 480 x 272 | | 800 x 480 | | 1024 x 600 | |
| | Max. Colors | 65,536 colors | 64K | 64K | 65,536 | | 65,536 | | 65,536 | |
| | Luminance (cd/m²) | 500 | 550 nits | 500 nits | 400 | | 300 | | 250 | |
| | Viewing Angle (H/V°) | 140/120 | 140/110 | 160/140 | 100/95 | | 140/130 | | 140/110 | |
| | Backlight Life (hr) | 50,000 | 50,000 | 50,000 | LED, 20,000 | | LED, 20,000 | | LED, 20,000 | |
| | Dimming | Adjustable | - | - | - | | - | | - | |
| Touchscreen | | 5 wire Analog Resistive | 5 wires Analog resistive | 5 wires Analog resistive | 4-wire analog resistive | | 4-wire analog resistive | | 4-wire analog resistive | |
| Power-On LED | | ✓ | ✓ | ✓ | ✓ | | ✓ | | ✓ | |
| Communication | COM1 | RS-232/422/485 (DB9) | RS-232/422/485 (DB9 Male) | RS-232/RS-422 RS-485 (DB9), 300~115.2 kbps | RS-232/422/485 (DB9) | | RS-232/422/485 (DB9) | | RS-232/422/485 (DB9) | |
| Interface | COM2 | RS-422/485 (Terminal 4pin+Ground) | RS-422/485 (Terminal Plug 4-Pin) | RS-422/RS-485 (Terminal 4 pin+Ground), 300~115.2 kbps | RS-422/485 (5-pin terminal) | | RS-422/485 (5-pin terminal) | | RS-422/485 (5-pin terminal) | |
| | COM3 | RS-485 (Termianl 2pin) | RS-485 (Terminal Plug 2-Pin) | RS-485 (Terminal 2 pin), 300~115.2 kbps | RS-232 (COM1: 5/7/8-pin) | | RS-232 (COM1: 5/7/8-pin) | | RS-232 (COM1: 5/7/8-pin) | |
| | CAN | Termianl 2pin | Terminal Plug 2-Pin | Terminal Plug 2-Pin | - | | - | | - | |
| | Ethernet (RJ45) | 10/100-BaseT | 10/100-BaseT | 10/100-BaseT | - | 10/100 BASE-T | - | 10/100 BASE-T | - | 10/100 BASE-T |
| I/Os | USB Client | USB 2.0 Client x 1 | USB 2.0 Client x 1 | USB 2.0 Client x 1 | ✓ | | ✓ | | ✓ | |
| | USB Host | USB 2.0 Host x 1 (Top) | USB 2.0 Host x 1 | USB 2.0 Host x 1 (Top) | ✓ | | ✓ | | ✓ | |
| | Micro-SD Slot | ✓ | ✓ | ✓ | - | ✓ | - | ✓ | - | ✓ |
| | SD Slot | - | - | - | - | | - | | - | |
| | Audio | 1 Lin out / 1 Mic in | 1 Line-out / 1 Mic-in | 1 Line-out / 1 Mic-in | - | | - | | - | |
| | Power Isolation | ✓ | ✓ | ✓ | - | | - | | - | |
| | I/O Isolation | ✓ | ✓ | ✓ | - | | - | | - | |
| Power Supply Voltage | | 24 V _{DC} ± 10% | 24 V _{DC} ± 10% | 24 V _{DC} ± 10% | 24 V _{DC} ± 10% | | 24 V _{DC} ± 10% | | 24 V _{DC} ± 10% | |
| Power Consumption | | 7W Typical | 9 W | 20 W | 5 W | | 10 W | | 10 W | |
| Dimensions W x H x D (mm) | | 203.4 x 150 x 43.7 mm (8.01" x 5.91" x 1.72") | 271.5 x 213.5 x 43.2 mm (10.69" x 8.41" x 1.7") | 311.8 x 238 x 54.5 mm (12.28" x 9.37" x 2.15") | 130 x 106.2 x 36.4 mm (5.11" x 4.18" x 1.43") | | 188 x 143.3 x 30 mm (7.4" x 5.64" x 1.18") | | 269.8 x 212 x 37.4 mm (10.62" x 8.35" x 1.47") | |
| Cut-out Dimensions W x H (mm) | | 192 x 138.5 mm (7.56" x 5.45") | 260 x 201.5 mm (10.24" x 7.93") | 302.5 x 228.5 mm (12.1" x 9.14") | 118.5 x 92.5 mm (4.66" x 3.64") | | 175 x 132.5 mm (6.89" x 5.21") | | 259.5 x 201.5 mm (10.22" x 7.93") | |
| Enclosure | | Die-cast aluminum alloy front bezel | PC + ABS | PC + ABS | PC + ABS | | PC + ABS | | PC + ABS | |
| Net Weight | | 1 kg (2.20 lbs) | 1.2 kg (2.65 lbs) | 2.5 kg (5.51 lb) | 0.3 kg (0.66 lb) | | 0.6 kg (1.32 lb) | | 1.2 kg (2.64 lb) | |
| Operating Temperature | | -20 ~ 60°C (-4 ~ 140°F) | -20 ~ 60°C (-4 ~ 140°F) | -20 ~ 60°C (-4 ~ 140°F) | 0 ~ 50°C (32 ~ 122°F) | | 0 ~ 50°C (32 ~ 122°F) | | 0 ~ 50°C (32 ~ 122°F) | |
| Storage Temperature | | -30 ~ 70°C (-22 ~ 158°F) | -30 ~ 70°C (-22 ~ 158°F) | -30 ~ 70°C (-22 ~ 158°F) | -20 ~ 60°C (-4 ~ 140°F) | | -20 ~ 60°C (-4 ~ 140°F) | | -20 ~ 60°C (-4 ~ 140°F) | |
| Humidity | | 10% ~ 90% RH @ 40°C, non-condensing | 10 ~ 90% RH @ 40°C, non-condensing | 10 ~ 90% RH @ 40°C, non-condensing | 10 ~ 90% RH @ 40°C, non-condensing | | 10 ~ 90% RH @ 40°C, non-condensing | | 10 ~ 90% RH @ 40°C, non-condensing | |
| Ingress Protection | | IP66 | Front panel: IP66 | Front panel: IP66 | Front panel: IP66 | | Front panel: IP66 | | Front panel: IP66 | |
| Certification | | CE, FCC, BSMI, CCC, UL-508 | CE, BSMI, CCC, UL, FCC Class A | CE, BSMI, CCC, UL, FCC Class A | CE, FCC, BSMI, CCC, UL | | CE, FCC, BSMI, CCC, UL | | CE, FCC, BSMI, CCC, UL | |

Industrial monitors



| Model | | FPM-7211W | FPM-7181W | FPM-7151W | FPM-7151T | FPM-7121T | FPM-7061T |
|-------------------------|-----------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|
| Display | Display Type | Full HD | WXGA | WXGA | XGA | XGA | VGA |
| | Display Size | 21.5" | 18.5" | 15.6" | 15" | 12.1" | 6.5" |
| | Max. Resolution | 1920 x 1080 | 1366 x 768 | 1366 x 768 | 1024 x 768 | 1024 x 768 | 640 x 480 |
| | Max.Colors | 16.7M | 16.7M | 16.7M | 16.7M | 16.2M | 16.2M |
| | Luminance cd/m ² | 300 | 300 | 300 | 400 | 600 | 800 |
| | Viewing Angle (H/V°) | 178/178 | 170/160 | 170/160 | 160/140 | 160/140 | 160/140 |
| | Backlight MTBF | 50,000 hr | 50,000 hr | 50,000 hr | 50,000 hr | 50,000 hr | 50,000 hr |
| Video Port | | VGA/DVI-D | VGA/DVI-D | VGA/DVI-D | VGA/DP | VGA/DP | VGA/DP |
| Touchscreen | | Combo | Combo | Combo | Combo | Combo | USB |
| OSD (onscreen display) | | Rear panel control buttons, lockable | Rear panel control buttons, lockable | Rear panel control buttons, lockable | Rear panel control buttons, lockable | Rear panel control buttons, lockable | Rear panel control buttons, lockable |
| Power Input Voltage | | 100 ~ 240 V (Optional adapter) | 100 ~ 240 V (Optional adapter) | 100 ~ 240 V (Optional adapter) | 100 ~ 240 V (Optional adapter) | 100 ~ 240 V (Optional adapter) | 100 ~ 240 V (Optional adapter) |
| DC Power Input(voltage) | | 24 V | 24 V | 24 V | 24 V | 24 V | 24 V |
| Operating Temperature | | 0 ~ 55°C | 0 ~ 55°C | 0 ~ 55°C | -20 ~ 60°C | -20 ~ 60°C | -20 ~ 60°C |
| Storage Temperature | | -20 ~ 60°C | -20 ~ 60°C | -20 ~ 60°C | -30 ~ 70°C | -30 ~ 70°C | -30 ~ 70°C |
| Dimensions | | 558.4 x 349.8 x 47.7 mm | 488 x 309 x 47.7 mm | 419.7 x 269 x 47.7 mm | 383.2 x 307.3 x 48.2 mm | 311.8 x 238 x 44.5 mm | 199 x 152 x 46.1 mm |
| Cut-out Dimensions | | 550.3 x 341.8 mm | 479.3 x 300.3 mm | 412.4 x 261.7 mm | 374.5 x 298.5 mm | 303 x 229 mm | 189.1 x 142.1 mm |
| Weight | | 8 kg | 6 kg | 5 kg | 4.2 kg | 2.6 kg | 1.2 kg |
| Certifications | | BSMI, CCC, CE, FCC Class A, UL | BSMI, CCC, CE, FCC Class A, UL | BSMI, CCC, CE, FCC Class A, UL | BSMI, CCC, CE, FCC Class A, UL | BSMI, CCC, CE, FCC Class A, UL | BSMI, CCC, CE, FCC Class A, UL |
| Operating System | | Windows XP/ Vista/7/8/10/XPE, Linux | Windows XP/ Vista/7/8/10/XPE, Linux | Windows XP/ Vista/7/8/10/XPE, Linux | Windows XP/ Vista/7/8/10/XPE, Linux | Windows XP/ Vista/7/8/10/XPE, Linux | Windows XP/ Vista/7/8/10/XPE, Linux |

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O Modules

8

Industrial I/O and Video Solutions

Industrial monitors

[illegible]



| Model | | FPM-3191G | FPM-3171G | FPM-3151G | FPM-3121G |
|------------------------|-----------------------------|------------------------------------|------------------------------------|------------------------------------|------------------------------------|
| Display | Display Type | SXGA | SXGA | XGA | XGA |
| | Display Size | 19" | 17" | 15" | 12.1" |
| | Max. Resolution | 1280 x 1024 | 1280 x 1024 | 1024 x 768 | 1024 x 768 |
| | Max.Colors | 16.7M | 16.7M | 16.2M | 16.2M |
| | Luminance cd/m ² | 350 | 350 | 350 | 600 |
| | Viewing Angle (H/V°) | 170/160 | 160/140 | 160/140 | 160/140 |
| | Backlight MTBF | 50,000 hr | 50,000 hr | 50,000 hr | 50,000 hr |
| Video Port | | VGA/DVI | VGA/DVI | VGA/DVI | VGA/DVI |
| Touchscreen | | Combo | Combo | Combo | Combo |
| OSD (onscreen display) | | Front panel control buttons | Front panel control buttons | Front panel control buttons | Front panel control buttons |
| Power Input Voltage | | 100 ~ 240 V (Optional adapter) | 100 ~ 240 V (Optional adapter) | 100 ~ 240 V (Optional adapter) | 100 ~ 240 V (Optional adapter) |
| DC Power Input | | 10 ~ 30 V | 10 ~ 30 V | 10 ~ 30 V | 10 ~ 30 V |
| Operating Temperature | | -20 ~ 60°C | -20 ~ 60°C | -20 ~ 60°C | -20 ~ 60°C |
| Storage Temperature | | -30 ~ 80°C | -30 ~ 80°C | -30 ~ 80°C | -30 ~ 80°C |
| Dimensions | | 482 x 399.2 x 67 mm | 482 x 354.8 x 63.5 mm | 312 x 224 x 60 mm | 312 x 224 x 60 mm |
| Cut-out Dimensions | | 441 x 376.4 mm | 447.2 x 329.2 mm | 303.5 x 229.5 mm | 303.5 x 229.5 mm |
| Weight | | 10.65 kg | 9.25 kg | 7.73 kg | 4.07 kg |
| Certifications | | CE, FCC Class A, BSMI, CCC, UL | CE, FCC Class A, BSMI, CCC, UL | CE, FCC Class A, BSMI, CCC, UL | CE, FCC Class A, BSMI, CCC, UL |
| Operating System | | Windows XP/Vista/7/8/10/XPE, Linux | Windows XP/Vista/7/8/10/XPE, Linux | Windows XP/Vista/7/8/10/XPE, Linux | Windows XP/Vista/7/8/10/XPE, Linux |

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O Modules

8

Industrial I/O and Video Solutions

General Panel PC

NEW

New Generation



| Model | PPC-3060S | PPC-3100S/3120S/3150S | | | PPC-3150SW/3180SW/3210SW | | | PPC-3100/3120 | |
|-----------------------------|--|---|---|--|--|---|--|--|---|
| CPU | Intel® Celeron® 1.58 GHz Processor (Dual Core) | Intel® Celeron® 1.83 GHz Processor (Quad Core) | | | Intel® Pentium® 1.1 GHz Processor (Quad Core) | Intel® Celeron® 1.83 GHz Processor (Quad Core) | | Intel® Atom™ 1.6GHz Processor (Quad Core) | |
| Memory | 1 x SO-DIMM DDR3L 1333 MHz (max. 4 GB) | 1 x SO-DIMM DDR3L 1333 MHz (max. 8 GB) | | | 1 x SO-DIMM DDR3L 1333 MHz (max. 8 GB) | 1 x SO-DIMM DDR3L 1333 MHz (max. 8 GB) | | 1 x SO-DIMM DDR3L (max. 8 GB) | |
| Display Type | TFT LED LCD | TFT LED LCD | TFT LED LCD | TFT LED LCD | TFT LED LCD | TFT LED LCD | TFT LED LCD | TFT LED LCD | |
| Display Size | 6.5 | 10.4 | 12.1 | 15 | 15.6 | 18.5 | 21.5 | 10.4 | 12.1 |
| Screen Ratio | 4:3 | 4:3 | | | 16:9 | | 16:9 | 4:3 | |
| Max. Resolution | 640 x 480 | 800 x 600 / 1024 x 768 | 1024 x 768 | 1024 x 768 | 1366 x 768 | 1366 x 768 | 1920 x 1080 | 800 x 600 | 1024 x 768 |
| Luminance cd/m ² | 800 | 400 / 350 | 500 | 400 | 400 | 300 | 300 | 400 | 600 |
| Viewing Angle (H/V°) | 160,140 | 160,140 / 176,176 | 160,140 | | 170,160 | 170,160 | 178,178 | 160,140 | |
| Backlight MTBF | 50,000 hr | 30,000 hr | 30,000 hr | 50,000 hr | 50,000 hr | 50,000 hr | 50,000 hr | 30,000 hr | 50,000 hr |
| Touchscreen | 5-wire resistive | Projected capacitive multi-touch/5-wire resistive | | | Projected capacitive multi-touch/5-wire resistive | | | 5-wire resistive | |
| Network (LAN) | 2 x GbE (Intel I211-AT) | 2 x GbE (Intel I211-AT) | | | 2 x GbE (Intel I211-AT, Intel I219LM) | 2 x GbE (Intel I211-AT) | | 2 x GbE | |
| IO Ports | 2 x serial ports: 1 x RS-232, 1 x RS-232/422/485 (adjustable via BIOS) 2 x USB 2.0, 1 x USB 3.0 | 2 x serial ports: 1 x RS-232, 1x RS-232/422/485 (adjustable via BIOS) 2 x USB 2.0, 1 x USB 3.0 (for PPC-3100S-RAE) 1 x USB 2.0, 1 x USB 3.0 (for PPC-3100S-PBE) | | | 2 x serial ports: 1 x RS-232, 1 x RS-232/422/485 (adjustable via BIOS) 1 x USB 2.0, 2 x USB 3.0 1 x line out | 2 x serial ports: 1 x RS-232, 1 x RS-232/422/485 (adjustable via BIOS) 1 x USB 2.0, 1 x USB 3.0 | | 5 x serial ports: 4 x RS-232, 1 x isolated RS-422/485 4 x USB 3.0 1 x DB15 VGA 1 x HDMI 1 x line out, 1 x mic in | |
| Storage | 1 x 2.5" SATA bay 1 x mSATA bay | 1 x 2.5" SATA bay 1 x mSATA bay | | | 1 x 2.5" SATA bay 1 x mSATA bay | 1 x 2.5" SATA bay 1 x mSATA bay | | 1 x 2.5" SATA bay 1 x mSATA bay | |
| Expansion | 1 x full-size mini PCIe | 1 x full-size mini PCIe | | | 1 x full-size mini PCIe | 1 x full-size mini PCIe | | 1 x PCIe x1; 1 x PCI (only PPC-3120) 1 x full-size mini PCIe | |
| Power Input (Voltage) | 12 ~ 24 V _{DC} | 12 ~ 24 V _{DC} | | | 12 ~ 24 V _{DC} | 12 ~ 24 V _{DC} | | 9 ~ 32 V _{DC} | |
| Enclosure | Front: Aluminum alloy Back: SECC | Aluminum alloy | | | Aluminum alloy | Aluminum alloy | | Front: Aluminum alloy Back: Plastic + SECC | |
| Ingress Protection | Front panel: IP65 | Front panel: IP65 | | | Front panel: IP65 | Front panel: IP65 | | Front panel: IP65 | |
| Mounting | Panel, VESA 75, wall, stand, ARM | Panel, VESA 75, wall, stand, ARM | | | Panel, VESA 75, wall, stand, ARM | Panel, VESA 75, wall, stand, ARM | | Panel, VESA 75, wall, stand, ARM | |
| Operating Temperature | 0 ~ 50°C (32 ~ 122°F) with SSD 0 ~ 40°C (32 ~ 104°F) with HDD | 0 ~ 50°C (32 ~ 122°F) with SSD 0 ~ 40°C (32 ~ 104°F) with HDD | | | 0 ~ 50°C (32 ~ 122°F) with SSD 0 ~ 40°C (32 ~ 104°F) with HDD | 0 ~ 50°C (32 ~ 122°F) with SSD 0 ~ 40°C (32 ~ 104°F) with HDD | | 0 ~ 50°C (32 ~ 122°F) with 2.5" SATA SSD -20 ~ 60°C (-4 ~ 140°F) with -40 ~ 85°C mSATA or 2.5" SATA SSD | |
| Storage Temperature | -30 ~ 60°C (-22 ~ 140°F) | -40 ~ 60°C (-40 ~ 140°F) | | | -20 ~ 60°C (-4 ~ 140°F) | -20 ~ 60°C (-4 ~ 140°F) | | -40 ~ 60°C (-40 ~ 140°F) | |
| Dimensions | 197.6 x 150.6 x 41 mm (7.8" x 5.9" x 1.6") | 272 x 217 x 46 mm (10.7" x 8.5" x 1.8") | 317 x 246 x 49 mm (12.5" x 9.7" x 1.9") | 391.3 x 312.4 x 51.5 mm (15.4" x 12.3" x 2.0") | 419.7 x 269 x 54 mm (16.52" x 10.59" x 2.16") | 488 x 309 x 55 mm (19.21" x 12.17" x 2.16") | 558.4 x 349.8 x 56.2 mm (22" x 13.8" x 2.2") | 271.8 x 216.8 x 57.5 mm (10.7" x 8.53" x 2.26") | 317 x 217 x 60.5 mm (12.5" x 9.7" x 2.4") |
| Weight | 1.5 kg | 1.9 kg | 2.1 kg | 4 kg | 5.4 kg | 7 kg | 7.5 kg | 2.5 kg | 3.3 kg |
| Certification | BSMI, CCC, CB, UL, CE, FCC Class B | BSMI, CCC, CB, UL, CE, FCC Class B | | | BSMI, CCC, CB, UL, CE, FCC Class B | BSMI, CCC, CB, UL, CE, FCC Class B | | BSMI, CCC, CB, UL, CE, FCC Class B | |
| Operating System | Windows 7/8.1/10, WES7, WEC7, Linux, Android 4.4 | Windows 7/8.1/10, WES7, WEC7, Linux, Android 4.4 | | | Windows 10, Linux, Android | Windows 7/8.1/10, WES7, WEC7, Linux, Android 4.4 | | Windows 10, Linux, Android | |

NEW



| Model | PPC-3150/3170/3190 | | | PPC-3151 | PPC-4151W/4211W | | PPC-3181SW/3211SW | |
|-----------------------------|---|--|---|---|---|---|---|--|
| CPU | Intel® Atom™ 1.91 GHz Processor (Quad Core) | | | 6th Gen Intel® Core™ i5 processor (Dual Core) | 4th Gen. Intel® Core™ i5/i3 Processor (Dual Core) | | 6th Gen Intel® Core™ i5 processor (Dual Core) | |
| Memory | 1 x SO-DIMM DDR3L 1333 MHz (max. 8 GB) | | | 1 x SO-DIMM DDR4 1866/2133 MHz (max. 16 GB) (1.2 V) | 1 x SO-DIMM DDR3L 1333/1600 MHz (max. 8 GB) | | 1 x SO-DIMM DDR4 1866/2133 MHz (max. 16 GB) | |
| Display Type | TFT LED LCD | TFT LED LCD | TFT LED LCD | TFT LED LCD | TFT LED LCD | | TFT LED LCD | |
| Display Size | 15 | 17 | 19 | 15 | 15.6 | 21.5 | 18.5 | 21.5 |
| Screen Ratio | 4:3 | | | 4:3 | 16:9 | | 16:9 | |
| Max. Resolution | 1024 x 768 | 1280 x 1024 | 1280 x 1024 | 1024 x 768 | 1366 x 768 | 1920 x 1080 | 1366 x 768 | 1920 x 1080 |
| Luminance cd/m ² | 400 | 350 | 350 | 400 | 400 | 300 | 300 | 300 |
| Viewing Angle (H/V°) | 160,140 | 160,140 | 170,160 | 160,140 | 170,160 | 178,178 | 170,160 | 178,178 |
| Backlight MTBF | 50,000 hr | 50,000 hr | 50,000 hr | 50,000 hr | 50,000 hr | 50,000 hr | 50,000 hr | 50,000 hr |
| Touchscreen | 5-wire resistive | | | Projected capacitive multi-touch | Projected capacitive multi-touch/5-wire resistive | | Projected capacitive multi-touch | |
| Network (LAN) | 2 x GbE (Intel I210) | | | 2 x GbE (Intel® I211-AT, I219LM) | 2 x GbE (Intel I211-AT, Intel I218LM) | | 2 x GbE (Intel I211-AT, Intel I219LM) | |
| IO Ports | 5 x serial ports: 4 x RS-232 (2 x external and 2 x via internal pin header, requires optional module), 1 x USB 3.0, 3 x USB 2.0 1 x VGA 1 x DVI.1a 1 x GPIO (8 channels, TTL level) via internal pin header (requires optional module) 1 x line out, 1 x mic in | | | 5 x serial ports: 4 x RS-232 (2 x via internal pin header, requires additional optional module), 1 x isolated RS-422/485, 4 x USB 3.0 1 x VGA 1 x DVI.1a 1 x GPIO (8 channels, TTL level) via internal pin header 1 x line out, 1 x mic in | 5 x serial ports: 4 x RS-232, 1 x isolated RS-422/485, 4 x USB 3.0 (rear), 1 x USB 2.0 (right side) 1 x DB15 VGA 1 x display port (1.2) 1 x line out, 1 x mic in | | 2 x serial ports: 1 x RS-232, 1 x RS-232/422/485 (adjustable via BIOS) 2 x USB 3.0, 2 x USB 2.0 (right side) 1 x HDMI | |
| Storage | 1 x 2.5" SATA bay 1 x mSATA bay | | | 1 x 2.5" SATA bay 1 x M.2 bay (22 x 42 mm) | 1 x 2.5" SATA bay 1 x mSATA bay | 2 x 2.5" SATA bay (Intel RAID) 1 x mSATA bay | 1 x 2.5" SATA bay 1 x mSATA bay | |
| Expansion | 1 x PCI (standard); 1 x PCIe x1 (in the accessory box) 1 x Full-size mini PCIe Optional: 1 x CFast; 1 x CF card; 1 x Internal USB dongle; 2 x RS-232 or 1 x RS-232 + 1 x GPIO | | | 1 x PCIe x4 (standard); 1 x PCI (in the accessory box) 1 x Full-size mini PCIe Optional: 1 x CFast; 1 x CF card; 1 x Internal USB dongle; 2 x RS-232 or 1 x RS-232 + 1 x GPIO | 1 x PCIe x4 (standard); 1 x PCI (in the accessory box) 1 x Full-size mini PCIe | | 1 x Full-size mini PCIe | |
| Power Input (Voltage) | 9 ~ 32 V _{DC} | | | 9 ~ 32 V _{DC} | 9 ~ 32 V _{DC} | 12 ~ 32 V _{DC} | 12 ~ 24 V _{DC} | |
| Enclosure | Plastic | | | Front: Aluminum alloy Back: Plastic | Front: Aluminum alloy Back: Plastic | | Aluminum alloy | |
| Ingress Protection | Front panel: IP65 | | | Front panel: IP65 | Front panel: IP65 | | Front panel: IP65 | |
| Mounting | Panel, VESA 75, wall, stand, ARM | | | Panel, VESA 75, wall, stand, ARM | Panel, VESA 75/100, wall, stand, ARM | | Panel, VESA 100, wall, stand, ARM | |
| Operating Temperature | 0 ~ 50°C (32 ~ 122°F) with 2.5 SATA HDD -20 ~ 60°C (-4 ~ 140°F) with -40 ~ 85°C mSATA or 2.5 SATA SSD | | | 0 ~ 50°C (32 ~ 122°F) with SSD 0 ~ 45°C (32 ~ 104°F) with HDD | 0 ~ 50°C (32 ~ 122°F) with SSD 0 ~ 45°C (32 ~ 104°F) with HDD | 0 ~ 50°C (32 ~ 122°F) | 0 ~ 50°C (32 ~ 122°F) with SSD 0 ~ 45°C (32 ~ 104°F) with HDD | |
| Storage Temperature | -40 ~ 60°C (-40 ~ 140°F) | | | -40 ~ 60°C (-40 ~ 140°F) | -20 ~ 60°C (-4 ~ 140°F) | | -20 ~ 60°C (-4 ~ 140°F) | |
| Dimensions | 396.5 x 317.6 x 65.3 mm (15.6" x 12.5" x 2.57") | 442.0 x 362.0 x 69.5 mm (17.4" x 14.3" x 2.74") | 458.2 x 384 x 67.3 mm (18" x 15" x 2.6") | 391.4 x 312.5 x 55.35 mm (15.41" x 12.3" x 2.18") | 419.7 x 269 x 59 mm (16.52" x 10.59" x 2.32") | 558.4 x 349.8 x 63.6 mm (22" x 13.8" x 2.5") | 488 x 309 x 61 mm (19.21" x 12.17" x 2.4") | 558.4 x 349.8 x 62.3 mm (22" x 13.8" x 2.45") |
| Weight | 5.3 kg | 6.3 kg | 7.9 kg | 5.4 kg | 5.69 kg | 7.8 kg | 7.6 kg | 8.1 kg |
| Certification | BSMI, CCC, CB, UL, CE, FCC Class A | | | BSMI, CCC, CB, UL, CE, FCC Class B | BSMI, CCC, CB, UL, CE, FCC Class B | | BSMI, CCC, CB, UL, CE, FCC Class B | |
| Operating System | Windows 7/8.1/10, WES7, WEC7, Linux | | | Windows 7/8.1/10, Linux | Windows 7/8.1/10, WES7, Linux | | Windows 7/8.1/10, WEC7, Linux | |

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O Modules

8

Industrial I/O and Video Solutions

General Panel PC



| Model | PPC-6151C/6171C/6191C-RTAE PPC-MB-8260AE | | | PPC-6151C/6171C/6191C-RMAE Support certified mini-ITX motherboards | | | PPC-6120 |
|-----------------------------|---|---|--|--|---|--|---|
| CPU | 6th Gen. Intel® Core™ i3/i5/i7/Celeron® Processor | | | Support processor up to 45W TDP depending on the Mini-ITX motherboard | | | 4th Gen. Intel® Core™ i3/i5/i7/Celeron® Processor |
| Memory | 1 x SO-DIMM DDR4 2133 MHz (max. 16 GB) | | | Subject to mini-ITX motherboard specifications | | | 2 x SO-DIMM DDR3/DDR3L 1066/1333 MHz (max. 16/8 GB per SO-DIMM) |
| Display Type | TFT LED LCD | | | TFT LED LCD | | | TFT LED LCD |
| Display Size | 15 | 17 | 19 | 15 | 17 | 19 | 12.1 |
| Screen Ratio | 4:3 | | | 4:3 | | | 4:3 |
| Max. Resolution | 1024 x 768 | 1280 x 1024 | 1280 x 1024 | 1024 x 768 | 1280 x 1024 | 1280 x 1024 | 1024 x 768 |
| Luminance cd/m ² | 400 | 350 | 350 | 400 | 350 | 350 | 600 |
| Viewing Angle (H/V°) | 160,140 | 160,140 | 170,160 | 160,140 | 160,140 | 170,160 | 160,140 |
| Backlight MTBF | 50,000 hr | | | 50,000 hr | | | 50,000 hr |
| Touchscreen | Projected capacitive multi-touch/5-wire resistive | | | Projected capacitive multi-touch/5-wire resistive | | | 5-wire resistive |
| Network (LAN) | 2 x GbE (Intel I211) | | | Subject to mini-ITX motherboard specifications | | | 2 x GbE (Intel I211, Intel I217LM) |
| IO Ports | 5 x serial ports: 3 x RS-232 (by cabling), 1 x RS-232/422/485, 1 x RS-232, 4 x USB3.0 (ext.), 2 x USB2.0 (int. pin head) 1 x DP 1.3, 1 x VGA 1 x line out, 1 x mic in 1 x GPIO (8-bit) (by cabling) | | | 4 x Reserved ports 2 x WLAN antenna ports Subject to mini-ITX motherboard specifications | | | 5 x serial ports: 4 x RS-232, 1 x isolated RS-422/485 4 x USB 3.0 (Ext.), 2 x USB 2.0 (int. pin head) 1 x display port 1.2 1 x VGA 1 x line out, 1 x mic in |
| Storage | 1 x 2.5" SATA bay 1 x mSATA bay | | | 2 x 2.5" SATA bay | | | 1 x 2.5" SATA bay 1 x mSATA bay |
| Expansion | 1 x PCIe x4 (standard); 2 x PCI (in the accessory box) Optional: 2 x PCIe x1 1 x PCIe x1 + 1 x PCI 1 x Full-size mini PCIe or 1 x mSATA Bay | | | Subject to mini-ITX motherboard specifications | | | 1 x PCIe x4 or 1 x PCI (Optional) 1 x Full-size mini PCIe |
| Power Input (Voltage) | 100 ~ 240 V _{AC} | | | 100 ~ 240 V _{AC} | | | 12 ~ 30 V _{DC} |
| Enclosure | Front: Aluminum alloy Back: Plastic | | | Front: Aluminum alloy Back: Plastic | | | Plastic |
| Ingress Protection | Front panel: IP65 | | | Front panel: IP65 | | | Front panel: IP65 |
| Mounting | Panel, VESA 75/100, wall, stand, ARM | | | Panel, VESA 75/100, wall, stand, ARM | | | Panel, VESA 75, wall, stand, ARM |
| Operating Temperature | 0 ~ 50°C (32 ~ 122°F) | | | 0 ~ 50°C (32 ~ 122°F) | | | 0 ~ 50°C (32 ~ 122°F) |
| Storage Temperature | -30 ~ 60°C (-22 ~ 140°F) | | | -30 ~ 60°C (-22 ~ 140°F) | | | -40 ~ 60°C (-40 ~ 140°F) |
| Dimensions | 391.4 x 312.5 x 103.6 mm (15.4" x 12.3" x 4.08") | 437 x 357 x 107.6 mm (17.2" x 14.06" x 4.2") | 454 x 379.8 x 107.5 mm (17.9" x 15" x 4.2") | 391.4 x 312.5 x 103.6 mm (15.4" x 12.3" x 4.08") | 437 x 357 x 107.6 mm (17.2" x 14.06" x 4.2") | 454 x 379.8 x 107.5 mm (17.9" x 15" x 4.2") | 325 x 253.8 x 73.8 mm (12.80" x 9.99" x 2.91") |
| Weight | 5.03 kg | 5.4 kg | 5.8 kg | 5.03 kg | 5.4 kg | 5.8 kg | 3.8 kg |
| Certification | BSMI, CCC, CB, UL, CE, FCC Class A | | | CB, UL, CE, FCC classA | | | BSMI, CCC, CB, UL, CE, FCC Class A |
| Operating System | Windows 7/8.1/10, Linux | | | Subject to mini-ITX motherboard specifications | | | Windows 7/8.1/10, Linux, WEC7, WES7P |

5

Automation Computers and Controllers

- 5-2 Control Cabinet PCs
- 5-8 Industrial IoT Gateways
- 5-12 iDoor Technology Modules
- 5-17 Modular IPCs
- 5-21 Intelligent Inspection Systems
- 5-25 Control IPCs
- 5-32 WISE-PaaS/EdgeLink-Enabled Gateways: ADAM-3600, ECU-1000TL
- 5-37 Remote DA&C Systems: ADAM-5000
- 5-44 Edge Data Acquisition and Analytics Platform: ADAM-6700




Advantech Control Cabinet PC

Diverse Form Factors for Different Mounting Scenarios in Cabinet Applications


Advantech's UNO-1000/3000 series of embedded control cabinet PCs are high-performance, fanless systems with multiple extensions and a ruggedized chassis. With iDoor technology, they also support automation feature extensions such as Fieldbus communication, Wi-Fi/3G, Digital I/O, and PoE. Versatile mounting options via DIN-rail, wall, enclosure, and panel mounts ensure easy installation for indicated market segments. The mounting options as control cabinet PCs make them particularly suitable for IoT gateway, motion, and vision applications.

Features and Benefits




Dual Power Input

Support for dual power input with a wide range of operating voltages provides a fail-safe mechanism to reduce downtime due to maintenance by providing an alternative power input source. Furthermore, remote power-on assists with working units going back online without the need to open the cabinet.



Built-In Digital I/O

Built-in digital I/O for simple I/O control, status detection, lighting control, and event triggering saves on additional costs and the need for extra devices.




Multiple Expansion Options

UNO modules support the latest range of expansion interfaces including PCIe for high-density I/O applications, iDoor for Fieldbus modules, and PCI for motion cards, with easy installation captive thumb screws.



Dual Digital Display

Flexible display options provide resolutions of up to 4K/2K to deliver outstanding image quality.



Dual iDoor Expansion

Advantech's iDoor technology provides simple, flexible, and reliable expandability in high-density systems with versatile color identification and multiple functions.



IEC-61010 Compliance

UNO-3382G/ 3384G conform to the UL/ IEC-61010 standard and support book mounting methods, making them suitable for installation in harsh industrial environments.



Easy Maintenance



Captive Thumb Screws

Operators can work efficiently with captive thumb screws, which are superior for swapping HDD, CFast, and PCI/PCI equipment and for maintaining storage and expansion devices.



Hot-Swappable RTC Battery

Removable RTC battery saves time and costs by avoiding the need to disassemble working units and shutting down the whole operation.



Hot-Swappable Storage

Hot-swappable HDD/SSD technology allows operators to deploy software or collect control data easily so that they can maintain working units without interruption.



- 1 Software and Industry Solutions
- 2 Industrial Server
- 3 Intelligent System
- 4 Intelligent HMI and Monitors
- 5 Automation Computers and Controllers
- 6 Industrial Communication
- 7 Remote I/O Modules
- 8 Industrial I/O and Video Solutions

Versatile Mounting with Easy Installation



DIN-Rail Mount

UNO-1000 series can be painlessly installed on rails with the sophisticated DIN rail kit at the rear and R-angle design at the front.



Wall Mount

Easy pull-out operation is an extremely convenient and makes these units suitable for all but the heaviest of installations.



Book Mount

The UNO-3300 is an open and universal automation solution that saves space and allows quick installation in control cabinets.



Enclosure Mount

The UNO-3400 series are designed for easy, quick installation in control cabinets. This series utilizes place-and-click snap connectors in further consideration of user activity in order to simplify installation procedures.

Control Cabinet PCs



NEW



| Model Name | UNO-1251G | UNO-1252G | UNO-1372G-J |
|---------------------------|---|--|--|
| Certification | CE, FCC, UL, CCC, BSMI | CE, FCC, UL, CCC, BSMI | CE, FCC, UL, CCC, BSMI |
| CPU | ARM Cortex A8 | Intel® Quark X1001 | Intel® Celeron J1900 2.0 GHz |
| Onboard RAM | Onboard 256 MB DDR2 | Onboard 512 MB DDR3L | Built-in 4 GB DDR3L |
| Battery-Backup RAM | FRAM 128 KB | - | - |
| Display | - | - | HDMI, DP |
| Audio | - | - | - |
| Digital I/O Serial Port | 1 x RS-485 1 x RS-422/485 1 x RS-232 1 x CAN | Isolated 4-ch digital I/O Isolated 1 x RS-232/485 1 x RS-232 | Isolated 4-ch digital I/O Isolated 4 x RS-232/422/485 |
| Ethernet Ports | 2 x RJ45, 10/100 Mbps | 2 x RJ45, 10/100 Mbps | 2 x RJ45, 10/100/1000 Mbps |
| USB Ports | 1 x USB2.0 | 1 x USB 2.0 1 x USB Client | 1 x USB3.0 3 x USB2.0 |
| PCIe/PCI Expansion | 1 x mPCIe (USB signal) | 2 x mPCIe (1 x only PCIe signal) | 2 x mPCIe |
| Watchdog Timer | - | - | ✓ |
| CompactFlash Slots | - | - | - |
| Storage | 1 x 1 GB microSD card (built-in) 1 x microSD card slot | 1 x 1 GB microSD card (built-in) | 1 x mSATA (shared with mPCIe slot) 1 x 2.5" HDD bay |
| SIM Card slot | 1 (micro) | 1 (micro) | 1 (micro) |
| Default OS | WEC7 | Ycoto Linux | - |
| Operating Systems | WEC7, Embedded Linux | Ycoto Linux | Win10, WES7P, WEC7, AdvLinuxTU |
| TPM | - | TPM 1.2 by iDOOR | TPM 2.0 onboard |
| Mounting | DIN rail | DIN rail | DIN rail |
| Power Input Range | 10 ~ 36 V _{DC} | 10 ~ 36 V _{DC} | 10 ~ 36 V _{DC} |
| Operating Temp. | -20 ~ 60°C | -20 ~ 60°C | -20 ~ 60°C |
| Power Consumption Typical | 5 W | 10 W | 19 W |
| Dimensions(WxDxH) | 50 x 90 x 100 mm (1.97" x 3.54" x 3.94") | 63 x 105 x 100 mm (2.48" x 4.13" x 3.94") | 65 x 105 x 150mm (2.6" x 4.1" x 5.9") |
| Weight | 0.4 kg | 0.6 kg | 1 kg |

NEW



| UNO-1372G-E | UNO-1372GH | UNO-1483G |
|---|---|---|
| CE, FCC, UL, CCC, BSMI | CE, FCC, UL, CCC, BSMI, CID2 | CE, FCC, UL, CCC, BSMI |
| Intel® ATOM E3845 1.91 GHz | Intel® ATOM E3845 1.91 GHz | Intel® Core i3-4010U |
| Built-in 4 GB DDR3L | Built-in 4 GB DDR3L | Built-in 8 GB DDR3L |
| - | - | - |
| VGA, HDMI | VGA, HDMI | VGA/DP |
| Line out | Line out | Line out |
| Isolated 4-ch digital I/O 1 x RS-422/485 1 x RS-232 | Isolated 4-ch digital I/O 1 x RS-422/485 1 x RS-232 | Isolated 4-ch digital I/O 1 x RS-232 2 x RS-422/485 |
| 3 x RJ45, 10/100/1000 Mbps | 3 x RJ45, 10/100/1000 Mbps | 4 x RJ45, 10/100/1000 Mbps |
| 1 x USB3.0 2 x USB2.0 | 1 x USB3.0 2 x USB2.0 | 2 x USB2.0 2 x USB3.0 |
| 2 x mPCIe | 2 x mPCIe | 2 x mPCIe 1 x PCIe x1 |
| ✓ | ✓ | ✓ |
| - | - | - |
| 1 x mSATA, 1 x 2.5" HDD bay | 1 x mSATA, 1 x 2.5" HDD bay | 1 x mSATA, 1 x 2.5" HDD bay |
| 2 (Standard) | 2 (Standard) | 1 (Standard, support by project) |
| - | - | - |
| Win10, WES7P, WEC7, AdvLinux | Win10, WES7P, WEC7, AdvLinux | Win10, WES7P, AdvLinux |
| TPM 1.2 by iDOOR | TPM 1.2 by iDOOR | TPM 1.2 by iDOOR |
| DIN rail, wall mount | DIN rail, wall mount | DIN rail, wall mount |
| 10 ~ 36 V _{DC} | 10 ~ 36 V _{DC} | 10 ~ 36 V _{DC} |
| -20 ~ 60°C | -20 ~ 60°C | -20 ~ 60°C |
| 24 W | 24 W | 40 W |
| 85 x 139 x 152 mm (3.3" x 5.5" x 6.0") | 85 x 139 x 152 mm (3.3" x 5.5" x 6.0") | 106 x 139 x 198 mm (4.2" x 5.8" x 7.8") |
| 1.6 kg | 1.6 kg | 2.4 kg |

1

Software and Industry
Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and
Monitors

5

Automation Computers
and Controllers

6

Industrial
Communication

7

Remote I/O Modules

8

Industrial I/O and
Video Solutions

Control Cabinet PCs

NEW



| Model Name | UNO-3083G/3085G UNO-3073G/3075G UNO-3073GL | UNO-3283G/UNO-3285G/UNO-3285C |
|------------------------------|---|--|
| CPU | UNO-3073GL: Intel Celeron® 807UE 1 GHz UNO-3073G: Intel Celeron® 847 1.1 GHz UNO-3083G/3085G: Intel Core i7 3555 LE 2.5 GHz or -2655LE 2.2 GHz | Intel® 6th Gen. Quad Core™ i7-6822EQ 2.0 GHz i5-6440EQ 2.7 GHz i5-6442EQ 1.9 GHz i3-6102E 1.9 GHz |
| Onboard RAM | 4 GB DDR3 | UNO-3283G: 8 GB DDR4 |
| Battery-Backup RAM | - | - |
| Display | DVI-I, HDMI | DVI-I, HDMI |
| Audio | Mic in, line out | Built-in line in/out + mic, I/O via iDoor |
| Serial Ports | 2 x RS-232/422/485 2 x RS-232 (optional) | 2 x RS-232/422/485 |
| Ethernet Ports | 2 x 10/100/1000BASE-T RJ-45 ports Supports AMT (UNO-3083G/3085G only) | 2 x 10/100/1000BASE-T RJ-45 (supports IEEE1588) |
| USB Ports | 4 x USB3.0 5 x USB2.0 (1 x internal) | 6 x USB 3.0 |
| PCIe/PCI Expansion | UNO-3073G/UNO-3073GL/3083G: 3 slots 3085G: 5 slots | UNO-3283G: 1 x PCIe x16 + 1 x PCI (Optional: 2 x PCIe x8) UNO-3285G/UNO-3285C: 2 x PCIe x8 + 2 x PCI (Optional: 4 x PCI) |
| Watchdog Timer | ✓ | ✓ |
| CFast Slot | Two internal | One internal |
| 2.5" HDD Expansion | 2 x SATA, supports RAID 0/1 (except UNO-3073GL) | 2 x SATA, supports RAID 0/1 |
| Operating Systems | Windows XP/7/8, WES7, WES-2009, Linux | WIN7/8, WES7, WES10, Linux |
| Mounting | Wall/Stand/Panel | Wall/Stand/Enclosure |
| Anti-Vibration | - | 4g w/SSD |
| Anti-Shock | 50g w/CF 20g w/HDD | 50g w/SSD |
| Power Input Range | 9 ~ 36 V _{DC} | 10 ~ 36 V _{DC} |
| Operating Temperature | -10 ~ 60°C (14 ~ 140°F) | -20 ~ 60°C (-4 ~ 140°F) |
| Power Consumption Typical | UNO-3073GL: 25 W (typical) UNO-3073G: 35 W (typical) UNO-3083G/3085G: 45 W (typical) | 90 W (typical) |
| Dimensions(WxDxH) | UNO-3083G/3073G/GL: 148 x 238 x 177 mm (5.8" x 9.3" x 7.0") UNO-3085G: 193 x 238 x 177 mm (7.6" x 9.3" x 7.0") | UNO-3283G: 142 x 238 x 177 mm (5.6" x 9.4" x 7") UNO-3285G: 182 x 238 x 177 mm (7.2" x 9.4" x 7") UNO-3285C: 197 x 238 x 177 mm (7.9" x 9.4" x 7") |
| Weight | UNO-3083G/3073G/GL: 4.5 kg UNO-3085G: 5.0 kg | UNO-3283G/ UNO-3285G: 4.0 kg UNO-3285C: 4.7 kg |



| Model Name | UNO-3382G/3384G | UNO-3483G |
|---------------------------|---|---|
| CPU | Intel® Core™ i7-4650U 1.7 GHz Intel® Celeron® 2980U 1.6 GHz | Intel® Core™ i7-3612QE |
| Onboard RAM | 8 GB DDR3L (Core i version) 4 GB DDR3L (Celeron version) | 8 GB DDR3/DDR3L |
| Battery-Backup RAM | Onboard MRAM 512 KB | - |
| Display | HDMI, DP | VGA, HDMI |
| Audio | Built-in line in/out + mic, I/O via iDoor | Mic in, line out (pin header) |
| Serial Ports | 1x RS-232/422/485 | 1 x RS-232, 1 x RS-232/422/485 with DB9 connection (pin header) |
| Ethernet Ports | 2 x 10/100/1000BASE-T RJ-45 (supports IEEE1588) | 2 x 10/100/1000BASE-T RJ-45 (supports IEEE1588) |
| USB Ports | 2 x USB 2.0 2 x USB 3.0 | 2 x USB 2.0 2 x USB 3.0 |
| PCIe/PCI Expansion | UNO-3382G: 2 x mini PCIe UNO-3384G: 2 x mini PCIe, 1 x PCIe x4 + 1 x PCI | 1 x PCIe x4, 3 x mini PCIe (2 x full, 1 x half) |
| Watchdog Timer | ✓ | ✓ |
| CompactFlash Slots | One internal | - |
| 2.5" HDD Expansion | 2 x SATA, supports RAID 0/1 | 2 x SATA, supports RAID 0/1 |
| Operating Systems | Windows 7/8, WES7, Windows 10 IoT Enterprise LTSB, Linux | Windows 7/8, WES7, WES-2009, Linux |
| Mounting | Book Mount | Enclosure Mount |
| Anti-Vibration | 2g w/SSD | 2g w/SSD |
| Anti-Shock | 50g w/SSD | 50g w/SSD |
| Power Input Range | 24 V _{DC} ± 20% | 12/24 V _{DC} ± 20% |
| Operating Temperature | 0 ~ 55°C (32 ~ 131°F) | -20 ~ 60°C (-4 ~ 140°F) |
| Power Consumption Typical | 45 W | 50 W |
| Dimensions(WxDxH) | UNO-3382G: 65.2 x 254 x 207 mm (2.57" x 10" x 8.15") UNO-3384G: 103.2 x 254 x 207 mm (4.06" x 10" x 8.15") | 305 x 82 x 225 mm (120.1" x 32.3" x 88.6") |
| Weight | UNO-3382G: 3.1 kg UNO-3384G: 3.9 kg | 4.9 kg |

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O Modules

8

Industrial I/O and Video Solutions

Connecting Smart Factory Machines and Processes to Accelerate Industry 4.0

Modular Box Platform Satisfies All Industrial Needs

In the Industry 4.0 era, fanless and ruggedized properties are not the only criteria for industrial embedded computers. Advantech's industrial embedded computers offer flexible and expandable features, and our new UNO-2000 series are based on a new modular form factor. Integrated with iDoor expandability, the new UNO-2000 series is adapted for embedded automation applications. The UNO-2271G, which is the size of a standard SSD, is the world's smallest embedded computer; and at a size of only 7.9", the performance of the UNO-2484G has been optimized with TPM2.0 for cyber security. Both of these units can be easily integrated with Advantech WebAccess, which helps bridge the gap between IT and OT.

The new UNO-2000 series also provides the time-to-market customized service, and the modularized design makes these units suitable for vertical markets. This design enables customers to introduce additional functionality and create more possibilities in different markets and applications by having a more flexible and manageable configuration approach to progress into the Industry 4.0 era.

Bridging the Gap Between IT and OT



New Innovative Design



Modular Platform Design

Universal (general applications), domain-specific (vertical application), and customized (by project base) UNO board-to-board connectors are suitable for all factory applications.



Wide-Range Power Input (10 ~ 36 V)

Wide-range power input ensures normal operation in unstable power environments.



iDoor Expansion with 100+ Combinations

More than 100+ combinations of iDoor technology enable UNO modules to meet the needs of every vertical application scenario.



Cable-Less Design

Cable-less design for internal space saving, enhanced MTBF, reliability of signal transition, and cost efficiency for assembly.



1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O Modules

8

Industrial I/O and Video Solutions



Friendly Assembly Design

User friendly screw design simplifies assembly for 2nd stack and iDoor modules.



Time-to-Market

Easy to configure and modular design shortens assembly times and time-to-market.



Dual Swappable SSD/HDD

Dual storage supports RAID 0/1 and external removable drive design makes for easier maintenance for data switching.



Rubber Stopper Design with Captive Screws

Modular boxes utilize a captive screw design to prevent screw loss during assembly and rubber stoppers to provide better system stability.



Lockable I/O Design

Fully lockable I/O ensures the system works properly and safely in high-vibration environments.



Versatile Mounting

Variety of mounting methods -VESA, DIN rail, pole, and stand mount.

Industrial IoT Gateways

NEW



NEW



NEW



| Model Name | UNO-2271G | UNO-2372G | UNO-2484G |
|------------------------------|---|--|--|
| CPU | Intel® Atom™ E3815, 1.46 GHz (E3825 support by project) | Intel® Atom™ J1900, 2.41 GHz | Intel® Core i7-6600U, 2.6 GHz/i7-7600U, 2.8 GHz Intel® Core i5-6300U, 2.4 GHz/i5-7300U, 2.6 GHz Intel® Core i3-6100U, 2.3 GHz/i3-7100U, 2.4 GHz |
| Onboard RAM | 4 GB DDR3L | 4 GB DDR3L | 8 GB DDR4 |
| Battery-Backup RAM | - | - | - |
| Display | 1 x HDMI | 1 x DP, 1 x HDMI | 1 x DP, 1 x HDMI |
| Audio | - | Line out | Line out |
| Serial Ports | UNO-2271G-E23AE: 2 x RS-232/422/485 | 4 x RS-232/422/485 | 4 x RS-232/422/485 |
| Ethernet Ports | 2 x RJ45, 10/100/1000Mbps | 2 x RJ45, 10/100/1000Mbps | 4 x RJ45, 10/100/1000Mbps |
| USB Ports | UNO-2271G-E21AE and E23AE: 1 x USB 3.0 UNO-2271G-E22AE: 3 x USB 2.0 and 1 x USB 3.0 | 1 x USB 3.0, 3 x USB 2.0 | 4 x USB 3.0 |
| Hardware Security | - | UNO-2372G-J021AE: TPM2.0 | TPM2.0 |
| mPCIe Expansion | 1 x Full-size mPCIe slot | 2 x Full-size mPCIe slots | Single stack version: 1 x Full-size mPCIe slots Double stack version: 4 x Full-size mPCIe slots |
| PCIe/PCI Expansion | - | - | - |
| Watchdog Timer | ✓ | ✓ | ✓ |
| Onboard Storage | 32 GB eMMC | - | - |
| Storage Expansion | - | 1 x mSATA shared with mPCIe slot 1 x 2.5" HDD/SDD bay | 1 x mSATA shared with mPCIe slot 1 x 2.5" HDD/SDD bay |
| Operating Systems | Windows 7/10, Advantech Linux | Windows 7/10, Advantech Linux | Windows 7/10, Advantech Linux |
| Mounting | Stand, wall, VESA (Δ), DIN rail (Δ), pole (Δ) | Stand, wall, VESA (Δ), DIN rail (Δ) | Stand, wall, VESA (Δ), DIN rail (Δ) |
| Anti-Vibration | 2g _{rms} w/mSATA | 2g _{rms} w/mSATA, 0.7g _{rms} w/HDD | 2g _{rms} w/mSATA, 0.7g _{rms} w/HDD |
| Anti-Shock | 50g w/mSATA | 50g w/mSATA | 50g w/mSATA |
| Power Input Range | 10 ~ 30 V _{DC} | 10 ~ 36 V _{DC} | 10 ~ 36 V _{DC} |
| Operating Temperature | 0 ~ 50°C (32 ~ 122°F) | -20 ~ 60°C (-4 ~ 140°F) | -20 ~ 60°C (-4 ~ 140°F) |
| Power Consumption Typical | 12 W | 30 W | 55 W |
| Power Requirements | 24 W | 42 W | 95.2 W |
| Dimensions (W x D x H) | UNO-2271G-E21AE: 100 x 70 x 30 mm (3.9" x 2.8" x 1.2"), UNO-2271G-E22AE and E23AE: 100 x 70 x 65 mm (3.9" x 2.8" x 2.6") | Single stack version: 150 x 105 x 35 mm (5.8" x 4.2" x 1.4") Double stack version: 150 x 105 x 65 mm (5.8" x 4.2" x 2.6") | Single stack version: 200 x 140 x 40 mm (7.8" x 5.6" x 1.6") Double stack version: 200 x 140 x 70 mm (7.8" x 5.6" x 2.8") |
| Weight | UNO-2271G-E21AE: 0.5 kg (1.1 lb) UNO-2271G-E22AE and E23AE: 0.6 kg (1.2 lb) | Single stack: 0.8 kg (1.76 lb) Double stack: 1.0 kg (2.2 lb) | Single stack: 1.4 kg (3.09 lb) Double stack: 1.6 kg (3.53 lb) |



| Model Name | UNO-2272G | UNO-2362G | UNO-2473G | UNO-2483G |
|------------------------------|---|--|--|--|
| CPU | Intel® Atom™ N2800, 1.86 GHz Intel® Celeron™ J1900, 2.0 GHz | AMD® G-series T40E, 1.0 GHz | Intel® Atom™ E3845, 1.91 GHz Intel® Celeron™ J1900, 2.0 GHz | Intel® Core™ i7-4650U, 1.7 GHz Intel® Core™ i3-4010U, 1.7 GHz Intel® Celeron® 2980U, 1.6 GHz |
| Onboard RAM | 2 GB DDR3L | 2 GB DDR3 | 4 GB DDR3L | 4/8 GB DDR3L |
| Battery-Backup RAM | - | - | - | - |
| Display | 2272G-N2AE: 1 x VGA 2272G-J2AE: 1 x HDMI | 1 x DP, 1 x HDMI | 1 x VGA, 1 x HDMI | 1 x VGA, 1 x HDMI |
| Audio | Line out | - | Line in/out | Line in/out |
| Serial Ports | UNO-2272G-N2AE: 1 x RS-232 UNO-2272G-J2AE: 1 x RS-232/422/485 | 1 x RS-232, 1 x RS-485 | UNO-2473G-E3AE: 2 x RS-232, 2 x RS-433/485 UNO-2473G-J3AE: 2 x RS-232, 2 x RS-232/433/485 | 2 x RS-232, 2 x RS-422/485 |
| Ethernet Ports | 1 x RJ45, 10/100/1000 Mbps | 2 x RJ45, 10/100/1000 Mbps | UNO-2473G-E3AE: 4 x RJ45, 10/100/1000 Mbps UNO-2473G-J3AE: 2 x RJ45, 10/100/1000 Mbps | 4 x RJ45, 10/100/1000 Mbps |
| USB Ports | UNO-2272G-N2AE: 3 x USB 2.0 UNO-2272G-J2AE: 2 x USB 2.0 and 1 x USB 3.0 | 4 x USB 2.0 | UNO-2473G-E3AE: 3 x USB 2.0, 1 x USB 3.0 UNO-2473G-J3AE: 4 x USB 2.0, 1 x USB 3.0 | 2 x USB 2.0, 2 x USB 3.0 |
| Hardware Security | - | - | - | - |
| mPCIe Expansion | UNO-2272G-N2AE: 1 x Full-size mPCIe slot, 1 x Half-size mPCIe slot UNO-2272G-J2AE: 2 x Full-size mPCIe slot | 1 x Full-size mPCIe slot | UNO-2473G-E3AE: 3 x Full-size mPCIe slot UNO-2473G-J3AE: 1 x Full-size mPCIe slot | 2 x Full-size mPCIe slot |
| PCIe/PCI Expansion | - | - | - | - |
| Watchdog Timer | ✓ | ✓ | ✓ | ✓ |
| Onboard Storage | - | - | - | - |
| Storage Expansion | UNO-2272G-N2AE: 1 x Full-size mSATA UNO-2272G-J2AE: 1 x Half-size mSATA | 1 x mSATA slot 1 x 2.5" HDD/SDD bay | 1 x mSATA slot 1 x 2.5" HDD/SDD bay | 1 x mSATA slot 2 x 2.5" HDD/SDD bay |
| Operating Systems | UNO-2272G-N2AE: Windows 7, Advantech Linux UNO-2272G-J2AE: Windows 7/10, Advantech Linux | Windows XP/7, Advantech Linux | Windows 7/10, WEC7, Advantech Linux | Windows 7/10, WEC7, Advantech Linux |
| Mounting | Stand, wall, VESA (Δ), DIN rail (Δ) | Stand, wall, VESA (Δ), DIN rail (Δ) | Stand, wall, VESA (Δ), DIN rail (Δ) | Stand, wall, VESA (Δ), DIN rail (Δ) |
| Anti-Vibration | 2g _{rms} w/mSATA | 2g _{rms} w/mSATA, 0.7g _{rms} w/HDD | 2g _{rms} w/mSATA, 0.7g _{rms} w/HDD | 2g _{rms} w/mSATA, 0.7g _{rms} w/HDD |
| Anti-Shock | 50g w/mSATA | 50g w/mSATA | 50g w/mSATA | 50g w/mSATA |
| Power Input Range | 24V _{DC} ± 20% | 24V _{DC} ± 15% | UNO-2473G-E3AE: 24V _{DC} ± 20% UNO-2473G-J3AE: 12/24V _{DC} ± 20% | 24V _{DC} ± 20% |
| Operating Temperature | UNO-2272G-N2AE: - 20 ~ 60°C (-4 ~ 140°F) UNO-2272G-J2AE: - 10 ~ 55°C (14 ~ 131°F) | - 10 ~ 60°C (14 ~ 140°F) | - 20 ~ 60°C (-4 ~ 140°F) | - 20 ~ 60°C (-4 ~ 140°F) |
| Power Consumption Typical | 14 W | 14 W | 15 W | 44 W |
| Power Requirements | 45.3 W | 47.3 W | 68 W | 87 W |
| Dimensions (W x D x H) | 157 x 88 x 50 mm (6.2" x 3.5" x 2.0") | 190 x 107 x 47 mm (7.5" x 4.2" x 1.8") | 252 x 149 x 62 mm (9.9" x 5.9" x 2.4") | 252 x 149 x 62 mm (9.9" x 5.9" x 2.4") |
| Weight | 0.8 kg (1.76 lb) | 1.0 kg (2.2 lb) | 1.6 kg (3.5 lb) | 1.6 kg (3.5 lb) |

1

Software and Industry
Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and
Monitors

5

Automation Computers
and Controllers

6

Industrial
Communication

7

Remote I/O Modules

8

Industrial I/O and
Video Solutions

Advantech iDoor Technology

Leading Industrial PC Trends

Advantech's innovative iDoor Technology is a new modular way of adding flexible functionality to a wide range of devices. iDoor Technology gives system integrators the flexibility to choose functions they need without purchasing costly extra devices with functions that they are unlikely to ever use. By using standardized components and interfaces, system integrators can leverage current state-of-the-art technologies as well as up-and-coming IPC trends. For instance, as embedded operating systems improve and higher performance storage methods become widely available, IPC suppliers are able to seamlessly integrate them into product lines for their customers.



iDoor Technology



Simple, Flexible, Reliable

The optimized design simplifies the iDoor mechanism with I/O plate, I/O module, and mPCIe card designs, making it easier to assemble and install. The modular design makes iDoor highly flexible for any configuration. Advantech's rugged design and comprehensive testing ensure that iDoor is a reliable offering.



Easy Maintenance

In addition to the iDoor's design making it easy to install into many platform/chassis types, the iDoor also provides a standard cable for internal cable routing and management. With captive screws and locked USB, it is easy for users to maintain.

iDoor Technology




Supports Different Platforms

iDoor technology is not only designed to work exclusively with Advantech's products, but it also gives system integrators the ability to use iDoor modules in any IPC with a spare PCIe slot. With the extended plate and adapter solution, this technology is particularly suitable for IPC platforms. The flexible design makes iDoor fulfill any other third party applications.




Integration of Multiple Functions

With the versatile functionality of iDoor, the system is suitable for a range of vertical applications. iDoor application modules include memory, storage, and external I/O modules; Fieldbus protocol modules (Ethernet/IP, Profibus, Profinet, EtherCAT, Powerlink, and so on); communication kits (WAN, MAN, LAN); and digital/analog I/O modules.




Fast Customization

The open-source nature of this technology allows system integrators to develop their own mPCIe card, their own exclusive iDoor functions, and even customized iDoor shell colors (e.g., including the company logo) to shape their brand image through color recognition. For those key accounts, they can integrate industry expertise in automation applications via iDoor technology.




iDoor I/O Plate with mPCIe Card

An iDoor module uses a mini PCIe slot on the motherboard. Most market requirements can be fulfilled by mPCIe card suppliers.



PCI/PCIe I/O Plate with mPCIe Card

For users who have a standard IPC on hand but require an expansion, we provide an optimization plate that can be utilized for expansion via the mPCIe interface.



PCI/PCIe I/O Plate with mPCIe Card in PCIe Adapter Card

Some customers need more expansion but are limited by the number of available mPCIe slots. We provide a PCIe adapter that gives an additional mPCIe slot by connecting through an existing PCIe slot to maximize expansion capacity.

- 1 Software and Industry Solutions
- 2 Industrial Server
- 3 Intelligent System
- 4 Intelligent HMI and Monitors
- 5 Automation Computers and Controllers
- 6 Industrial Communication
- 7 Remote I/O Modules
- 8 Industrial I/O and Video Solutions



Standard Interface

The standard dimensions of the 81 x 19.4 mm I/O plate with mPCIe interface are supported by the following models:

- Embedded DIN-Rail Controller: UNO-1000 series
- Embedded Automation PC: UNO-2000 series
- Embedded BOX IPC: UNO-3000 series
- Embedded Automation Panel: TPC series



Versatile Color Identification

For easy identification, iDoor uses a color convention that represents the primary colors of the logos for the key protocols that the modules are related to. For example, the red is the most obvious color for EtherCAT, and so the I/O plate is colored PANTONE 1795C, whereas a black plate is used for the POWERLINK logo.

iDoor Module Selection Guide

Industrial I/O & Peripheral



| Model Name | PCM-2300MR | PCM-23C1CF | PCM-23U1DG | PCM-24R1TP | PCM-24U2U3 | PCM-24R2PE | PCM-24R2GL | PCM-28P1AD | PCM-28P1BK | PCM-27J3AU |
|-------------|----------------------------|------------------------------------|--|---|-----------------------------------|--|---|--|----------------------|---|
| Description | MR4A16B, MRAM, 2 MB, mPCIe | 1 CFast Slot with cover protection | USB slot w/ lock for USB dongle, half-size mPCIe | 1-port Gigabit Ethernet, Intel® 82574L, mPCIe, RJ45 | 2-port USB 3.0, mPCIe, USB-A type | 2-port Gigabit Ethernet, IEEE 802.3af (PoE)-compliant, mPCIe, RJ45 | 2-port Gigabit Ethernet, Intel® i350, mPCIe, RJ45 | PCIe to mPCIe, 2-slot mPCIe, iDoor I/O plate expansion | iDoor PCIe I/O plate | 3-port audio stereo, mPCIe, 3.5-mm jack |



| Model Name | PCM-24D2R4 | PCM-24D2R2 | PCM-24D4R4 | PCM-24D4R2 | PCM-27D24DI |
|-------------|--|------------------------------------|--|--|---|
| Description | 2-port Isolated RS-422/485, mPCIe, DB9 | 2-port Isolated RS-232, mPCIe, DB9 | 4-port non-isolated RS-422/485 mPCIe, DB37 cable | 4-port non-isolated RS-232 mPCIe, DB37 cable | 24-ch isolated digital I/O with counter mPCIe, DB37 |

Wireless Communication



| Model Name | PCM-24S2WF | PCM-24S33G | PCM-24S34G |
|-------------|--|--|--|
| Description | Wi-Fi 802.11 a/b/g/n 2T2R w/Bluetooth 4.0, half-size mPCIe, antennas | 3.75G HSPA/GPS, full-size mPCIe, front-accessible dual SIM card slots, 3G/GPS antennas | LTE/HSPA+/GPRS and GPS, full-size mPCIe, 4G/GPS antennas |

Industrial Fieldbus



| Model Name | PCM-26D2CA | PCM-26D1DB | PCM-26R2PN | PCM-26R2EC | PCM-26R2EI | PCM-26R2S3 | PCM-26R2PL |
|-------------|--|---|--|--|---|--|---|
| Description | 2-port isolated CANBus mPCIe, CANopen, DB9 | 1-port Hilscher netX100 FieldBus mPCIe, PROFIBUS, DB9 | 2-port Hilscher netX100 FieldBus mPCIe, PROFINET, RJ45 | 2-port Hilscher netX100 FieldBus mPCIe, EtherCAT, RJ45 | 2-port Hilscher netX100 FieldBus mPCIe, EtherNet/IP, RJ45 | 2-port Hilscher netX100 FieldBus mPCIe, SerCos III, RJ45 | 2-port Hilscher netX100 FieldBus mPCIe, POWERLINK, RJ45 |

Naming Convention

PCM-26D2CA

| Category | Connector | Function |
|--------------------------------|--------------|----------------------------|
| 23-Memory/storage/external I/O | R-RJ45 | BK-Bracket |
| 24-Communication | D-DB9 | DB-PROFIBUS |
| 25-Display | U-USB | PN-PROFINET |
| 26-Fieldbus | P-PCIe/mPCIe | EI-Ethernet/IP |
| 27-Digital/analog I/O | | EC-EtherCAT |
| 28-Expansion kit | | S3-SERCOS III |
| | | CA-CANopen |
| | | PL-PowerLink |
| | | WF-Wi-Fi/BT |
| | | 3G-3G/GPS |
| | | ZB-ZigBee |
| | | AD-Adapter |
| | | PE-PoE |
| | | TP-Precision Time Protocol |
| | | DC-Daisy-Chain |
| | | MR-MRAM |
| | | TM-TPM |
| | | DI-Digital I/O |
| | | AI-Analog I/O |
| | | R4-Multi-drop RS-422/485 |
| | | R2-Single-ended RS-232 |
| | | ID-Intelligent displays |
| | | U3-USB 3.0 |
| | | HD-HDMI |
| | | 4G-LTE/GPS |
| | | DG-Dongle |
| | | GL-Gigabit LAN |

iDoor Support Table

| Model / Platform | Function | UNO-1252G | UNO-1483G | UNO-1372G-E | UNO-1372G-J | UNO-2271G-E2 | UNO-2272G-N2 |
|------------------|-------------------------|-----------|-----------|-------------|-------------|--------------|--------------|
| PCM-24D2R2-AE | Iso. RS-232 | ✓ | ✓ | ✓ | - | ✓ | ✓ |
| PCM-24D2R4-AE | Iso. RS-422/485 | ✓ | ✓ | ✓ | - | ✓ | ✓ |
| PCM-24D2R2-BE | Iso. RS-232 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-24D2R4-BE | Iso. RS-422/485 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-24D4R2-AE | Non-iso. RS-232 | ✓ | ✓ | ✓ | - | ✓ | ✓ |
| PCM-24D4R4-AE | Non-iso. RS-422/485 | ✓ | ✓ | ✓ | - | ✓ | ✓ |
| PCM-24D4R2-BE | Non-iso. RS-232 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-24D4R4-BE | Non-iso. RS-422/485 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-26D2CA | CANOpen | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-27D24DI | Iso. digital I/O | - | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-24R1TP | GigaLAN IEEE1588 | - | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-2300MR | MRAM | - | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-23C1CF | CFast | - | ✓ | ✓ | - | - | - |
| PCM-24R2GL | 2-port GigaLAN | - | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-23U1DG-BE | USB dongle w/mPCIe | - | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-24R2PE | PoE | - | ✓ | ✓ | ✓ | - | ✓ |
| PCM-24S2WF-AE | Wi-Fi | ✓ | ✓ | ✓ | - | ✓ | ✓ |
| PCM-24S2WF-BE | M.2 Wi-Fi | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-24U2U3 | USB 3.0 | - | ✓ | ✓ | ✓ | - | ✓ |
| PCM-24S23G-AE | 3G/GPS w/SMA BKT | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-24S33G-AE | 3G/GPD w/dual SIM | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-24S34G | LTE/GPS | - | ✓ | ✓ | ✓ | - | - |
| PCM-2300TM | TPM | - | - | * | - | - | - |
| PCM-26D1DB | PROFIBUS | - | ✓ | ✓ | ✓ | ✓ | - |
| PCM-26R2PN | PROFINET | - | ✓ | ✓ | ✓ | ✓ | - |
| PCM-26R2EC | EtherCAT | - | ✓ | ✓ | ✓ | ✓ | - |
| PCM-26R2EI | EtherNet/IP | - | ✓ | ✓ | ✓ | ✓ | - |
| PCM-26R2S3 | Sercos 3 | - | ✓ | ✓ | ✓ | ✓ | - |
| PCM-26R2PL | POWERLINK | - | ✓ | ✓ | ✓ | ✓ | - |
| PCM-28P1AD | iDoor PCIe adapter card | - | ✓ | - | - | - | - |
| PCM-28P1BK | iDoor PCIe I/O plate | - | ✓ | - | - | - | - |
| PCM-27J3AU | Audio | - | ✓ | ✓ | ✓ | ✓ | - |
| PCM-29R1TX | iLink | - | ✓ | ✓ | ✓ | - | - |

| Model / Platform | Function | UNO-2272G-J2 | UNO-2362G | UNO-2372G-E022AE | UNO-2473G-E3 | UNO-2473G-J3 | UNO-2483G |
|------------------|-------------------------|--------------|-----------|------------------|--------------|--------------|-----------|
| PCM-24D2R2-AE | Iso. RS-232 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-24D2R4-AE | Iso. RS-422/485 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-24D2R2-BE | Iso. RS-232 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-24D2R4-BE | Iso. RS-422/485 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-24D4R2-AE | Non-iso. RS-232 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-24D4R4-AE | Non-iso. RS-422/485 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-24D4R2-BE | Non-iso. RS-232 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-24D4R4-BE | Non-iso. RS-422/485 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-26D2CA | CANOpen | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-27D24DI | Iso. digital I/O | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-24R1TP | GigaLAN IEEE1588 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-2300MR | MRAM | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-23C1CF | CFast | - | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-24R2GL | 2-port GigaLAN | ✓ | - | ✓ | ✓ | ✓ | ✓ |
| PCM-23U1DG-BE | USB dongle w/mPCIe | ✓ | - | ✓ | ✓ | ✓ | ✓ |
| PCM-24R2PE | PoE | ✓ | ✓ | ✓ | ✓ | - | * |
| PCM-24S2WF-AE | Wi-Fi | ✓ | ✓ | - | ✓ | ✓ | ✓ |
| PCM-24S2WF-BE | M.2 Wi-Fi | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-24U2U3 | USB 3.0 | ✓ | - | ✓ | ✓ | ✓ | * |
| PCM-24S23G-AE | 3G/GPS w/SMA BKT | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-24S33G-AE | 3G/GPD w/dual SIM | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-24S34G | LTE/GPS | - | ✓ | ✓ | ✓ | ✓ | * |
| PCM-2300TM | TPM | - | - | - | ✓ | - | ✓ |
| PCM-26D1DB | PROFIBUS | - | - | ✓ | ✓ | ✓ | ✓ |
| PCM-26R2PN | PROFINET | - | - | ✓ | ✓ | ✓ | ✓ |
| PCM-26R2EC | EtherCAT | - | - | ✓ | ✓ | ✓ | ✓ |
| PCM-26R2EI | EtherNet/IP | - | - | ✓ | ✓ | ✓ | ✓ |
| PCM-26R2S3 | Sercos 3 | - | - | ✓ | ✓ | ✓ | ✓ |
| PCM-26R2PL | POWERLINK | - | - | ✓ | ✓ | ✓ | ✓ |
| PCM-28P1AD | iDoor PCIe adapter card | - | - | - | - | - | - |
| PCM-28P1BK | iDoor PCIe I/O plate | - | - | - | - | - | - |
| PCM-27J3AU | Audio | - | ✓ | ✓ | - | ✓ | - |
| PCM-29R1TX | iLink | ✓ | - | ✓ | ✓ | ✓ | ✓ |

* Contact Advantech for Further Information

**Need extra accessory

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O Modules

8

Industrial I/O and Video Solutions

iDoor Support Table

| Model / Platform | Function | UNO-2484G-67x1AE | UNO-2484G-67x2AE | UNO-3283G | UNO-3382G/3384G | UNO-3483G | (TPC-1x82H/1282T) |
|------------------|-------------------------|------------------|------------------|-----------|-----------------|-----------|-------------------|
| PCM-24D2R2-AE | Iso. RS-232 | - | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-24D2R4-AE | Iso. RS-422/485 | - | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-24D2R2-BE | Iso. RS-232 | - | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-24D2R4-BE | Iso. RS-422/485 | - | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-24D4R2-AE | Non-iso. RS-232 | - | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-24D4R4-AE | Non-iso. RS-422/485 | - | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-24D4R2-BE | Non-iso. RS-232 | - | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-24D4R4-BE | Non-iso. RS-422/485 | - | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-26D2CA | CANOpen | - | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-27D24DI | Iso. digital I/O | - | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-24R1TP | GigaLAN IEEE1588 | - | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-2300MR | MRAM | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-23C1CF | CFast | - | ** | - | - | ✓ | - |
| PCM-24R2GL | 2-port GigaLAN | - | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-23U1DG-BE | USB dongle w/mPCle | - | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-24R2PE | PoE | - | ✓ | ✓ | ✓ | ✓ | - |
| PCM-24S2WF-AE | Wi-Fi | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-24S2WF-BE | M.2 Wi-Fi | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-24U2U3 | USB 3.0 | - | ✓ | ✓ | ✓ | ✓ | - |
| PCM-24S23G-AE | 3G/GPS w/SMA BKT | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-24S33G-AE | 3G/GPD w/dual SIM | - | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-24S34G | LTE/GPS | ✓ | ✓ | ✓ | - | - | - |
| PCM-2300TM | TPM | - | - | - | - | ✓ | - |
| PCM-26D1DB | PROFIBUS | - | ✓ | ✓ | ✓ | ✓ | - |
| PCM-26R2PN | PROFINET | - | ✓ | ✓ | ✓ | ✓ | - |
| PCM-26R2EC | EtherCAT | - | ✓ | ✓ | ✓ | ✓ | - |
| PCM-26R2EI | EtherNet/IP | - | ✓ | ✓ | ✓ | ✓ | - |
| PCM-26R2S3 | Sercos 3 | - | ✓ | ✓ | ✓ | ✓ | - |
| PCM-26R2PL | POWERLINK | - | ✓ | ✓ | ✓ | ✓ | - |
| PCM-28P1AD | iDoor PCIe adapter card | - | - | ✓ | ✓ | ✓ | ✓ |
| PCM-28P1BK | iDoor PCIe I/O plate | - | - | ✓ | ✓ | ✓ | ✓ |
| PCM-27J3AU | Audio | - | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-29R1TX | iLink | - | ✓ | * | * | * | - |

| Model / Platform | Function | (TPC-1581WP) | (TPC-1881WP) | (TPC-xx51WP) | (TPC-xx51T) | TPC-2xx1T/W | TPC-5XXXT/W | IPPC-5211WS |
|------------------|-------------------------|--------------|--------------|--------------|-------------|-------------|-------------|-------------|
| PCM-24D2R2-AE | Iso. RS-232 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-24D2R4-AE | Iso. RS-422/485 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-24D2R2-BE | Iso. RS-232 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-24D2R4-BE | Iso. RS-422/485 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-24D4R2-AE | Non-iso. RS-232 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-24D4R4-AE | Non-iso. RS-422/485 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-24D4R2-BE | Non-iso. RS-232 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-24D4R4-BE | Non-iso. RS-422/485 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-26D2CA | CANOpen | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-27D24DI | Iso. digital I/O | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-24R1TP | GigaLAN IEEE1588 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-2300MR | MRAM | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-23C1CF | CFast | - | - | ** | ** | - | ✓ | - |
| PCM-24R2GL | 2-port GigaLAN | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-23U1DG-BE | USB dongle w/mPCle | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-24R2PE | PoE | - | - | - | - | - | ✓ | - |
| PCM-24S2WF-AE | Wi-Fi | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-24S2WF-BE | M.2 Wi-Fi | ✓ | ✓ | ✓ | ✓ | - | - | - |
| PCM-24U2U3 | USB 3.0 | ** | ** | - | ** | - | ✓ | ** |
| PCM-24S23G-AE | 3G/GPS w/SMA BKT | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-24S33G-AE | 3G/GPD w/dual SIM | ✓ | ✓ | - | - | ✓ | - | - |
| PCM-24S34G | LTE/GPS | - | - | - | - | - | ✓ | - |
| PCM-2300TM | TPM | - | - | - | - | - | - | - |
| PCM-26D1DB | PROFIBUS | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-26R2PN | PROFINET | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-26R2EC | EtherCAT | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-26R2EI | EtherNet/IP | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-26R2S3 | Sercos 3 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-26R2PL | POWERLINK | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-28P1AD | iDoor PCIe adapter card | - | - | - | - | - | - | - |
| PCM-28P1BK | iDoor PCIe I/O plate | - | - | - | - | - | - | - |
| PCM-27J3AU | Audio | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PCM-29R1TX | iLink | - | - | - | - | - | - | - |

* Contact Advantech for Further Information

**Need extra accessory

Modular IPCs

Overview

Advantech's modular IPCs are fan-based systems for high-performance computing applications where fanless, embedded systems are required for harsh work environments. Our next generation of IPCs feature a modular design for high expandability and flexible configuration. With this brilliant design, Advantech modular IPCs are suitable for a diverse range of industrial applications.



Micro Computer



The AiMC series of microcomputers is designed for machine automation applications such as system security, intelligent inspection, and PCBA. With PoE vision and a rich I/O interface, the AiMC series features high-performance computing with low power consumption, intelligent management capability, and extended product longevity.

Industrial Modularized Computer



Our compact modular IPCs support i-module expansion to satisfy many application requirements. Modular computers reduce lead times for CTOS due to their easy configuration. They can also be widely deployed for factory and machine automation.

Compact Fanless Computer



The AiMC-2000 fanless embedded microcomputer is an intelligent and application-specific system equipped with an Intel Celeron J1900 Quad Core processor and multiple I/O ports. The solid aluminum top cover and sealed chassis offers vibration, shock, and dust resistance, and its passive cooling provides quiet and reliable operation.

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O Modules

8

Industrial I/O and Video Solutions

Modular IPCs



| Model name | | AiMC-3202 | AiMC-3422 | MIC-7900 |
|--------------------------|------------------------|--|---|--|
| Form Factor | | Compact | Compact | Compact |
| Processor System | Chipset | H110 | H110 | - |
| | CPU | Intel® 6th/7th Gen Core™ i (LGA1151) | Intel® 6th/7th Gen Core™ i (LGA1151) | Intel® Xeon® D-1559/D-1539 BGA-type |
| | Core | Max. 4 | Max. 4 | Max. 12 |
| | Cache | Max. 8 MB | Max. 8 MB | Max. 18 MB |
| | Memory | DDR4 1866/2133 MHz (non-ECC) Max. 32 GB | DDR4 1866/2133 MHz (non-ECC) Max. 32 GB | Dual DDR4 2400 MHz (supports ECC) Max. 32 GB |
| Graphic | Graphics Controller | Intel® HD Graphics | Intel® HD Graphics | ASPEED AST1400 with 256 MB VGA memory provides basic 2D VGA function |
| | VRAM | Shared system memory is subject to OS | Shared system memory is subject to OS | Shared system memory is subject to OS |
| Expansion | PCIe x16 | AIMC-3202-00A1E 1 x PCIe x16, 1 x PCIe x4 AIMC-3202-01A1E 1 x PCIe x16, 1 x PCI | AIMC-3422-00A1E 1 x PCIe x16, 1 x PCIe x1, 2 x PCI AIMC-3422-01A1E 1 x PCIe x16, 3 x PCI | Supported via i-Module |
| | PCIe x8 | - | - | |
| | PCIe x4 | - | - | |
| | PCIe x1 | - | - | |
| | PCI | - | - | |
| | Mini PCIe | - | - | 1 |
| Storage | Storage Bay | 2 x 2.5" internal HDD bay | 1 x 3.5" or 2 x 2.5" internal HDD bay | 1 x 2.5" internal HDD/SSD bay |
| | M.2 | - | - | 22110 (2280 w/ bracket) |
| | mSATA | 1 | 1 | 1 |
| | CFast | - | - | 1 |
| | RAID | - | - | - |
| Ethernet | Ethernet Interface | 10/100/1000 Mbps | 10/100/1000 Mbps | 10/100/1000 Mbps |
| | Controller | LAN 1: Intel® I219V LAN 2: Intel® I211AT | LAN 1: Intel® I219V LAN 2: Intel® I211AT | 4 x Intel® i210IT |
| Front I/O | Display | VGA+DVI-D | VGA | VGA |
| | LAN | 2 | 2 | 4 |
| | USB | 3 x USB 3.0 | 1 x USB 3.0 | 4 x USB 3.0 |
| | COM | 2 x RS-232 | 2 x RS-232 | 2 x RS-232/422/485 |
| | PS/2 | 1 | 1 | - |
| | Audio | - | - | Line out/mic in |
| Rear I/O | Display | - | - | - |
| | LAN | - | - | - |
| | USB | - | 2 x USB 2.0 | - |
| | COM | - | - | - |
| | PS/2 | - | - | - |
| | Audio | - | - | - |
| Watchdog Timer | Output | System reset | System reset | System reset |
| | Interval | Programmable 1 ~ 255 s/min | Programmable 1 ~ 255 s/min | Programmable 1 ~ 255 s/min |
| Power Supply | Output Wattage | 250W | 300W | - |
| | Input Range | 100 ~ 240 V _{AC} | 100 ~ 240 V _{AC} | 9 ~ 36 V _{DC} |
| | Remote Power Switch | - | - | - |
| Cooling | System Fan | 2 (6 cm/14.1 CFM) | 1 (9 cm/53 CFM) | - |
| | Air Filter | Yes | Yes | - |
| Physical Characteristics | Dimensions (W x H x D) | 232 x 90 x 232 mm (9.13" x 3.54" x 9.13") | 150 x 222 x 270 mm (5.9" x 8.74" x 10.62") | 73 x 192 x 230 mm (2.91" x 7.55" x 9.05") |
| | Weight | 4.5 kg | 5 kg | 2.9 kg |

✓ : supported, - : not supported, △ : optional

NEW



NEW



NEW



| Model name | | MIC-7500 | MIC-7700 | MIC-7300 | MIC-7420 |
|--------------------------|------------------------|--|--|---|---|
| Form Factor | | Compact | Compact | Compact | 19" 2U Rack Mount |
| Processor System | Chipset | QM170 | Q170/H110 | - | QM170 |
| | CPU | Intel 6th Gen Core i BGA-type | Intel® 6th/7th Gen Core™ i (LGA1151) | Intel® Celeron® N3350/Atom™ x7-E3950 BGA-type | Intel 6th Gen Core i BGA-type |
| | Core | Max. 4 | Max. 4 | Max. 4 | Max. 4 |
| | Cache | Max. 8 MB | Max. 8 MB | 2 MB | Max. 8 MB |
| | Memory | Dual DDR4 2400 MHz Max. 32 GB | Dual DDR4 2400 MHz Max. 32 GB | Dual DDR3L 1867 MHz Max. 8 GB | Dual DDR4 2400 MHz Onboard 8GB & 1 SODIMM slot Max. 24GB |
| Graphic | Graphics Controller | Intel® HD Graphics | Intel® HD Graphics | Intel® HD Graphics | Intel® HD Graphics |
| | VRAM | Shared system memory is subject to OS | Shared system memory is subject to OS | Shared system memory is subject to OS | Shared system memory is subject to OS |
| Expansion | PCIe x16 | Supported via i-Module | Supported via i-Module | - | - |
| | PCIe x8 | | | - | - |
| | PCIe x4 | | | - | 2 |
| | PCIe x1 | | | Supported via i-Module | - |
| | PCI | | | Supported via i-Module | 2 |
| | Mini PCIe | 2 | 2 | 1 | 1 |
| Storage | Storage Bay | 1 x 2.5" internal HDD/SSD bay | 1 x 2.5" internal HDD/SSD bay | 1 x 2.5" internal HDD/SSD bay | 2 x 3.5" internal HDD bay |
| | M.2 | - | - | - | 1 M.2 (2260 M-key) |
| | mSATA | 1 | 1 | 1 | - |
| | CFast | 1 | 1 | - | - |
| | RAID | 0/1/5/10 | 0/1/5/10 (Q SKU only) | - | 0/1 |
| Ethernet | Ethernet Interface | 10/100/1000 Mbps | 10/100/1000 Mbps | 10/100/1000 Mbps | 10/100/1000 Mbps |
| | Controller | LAN 1: Intel i219LM LAN 2: Intel i210IT | LAN 1: MIC-7700Q: Intel i219LM/MIC-7700H: Intel i219V LAN 2: Intel i210IT | 2 x Intel® i210AT | LAN 1: Intel® i219LM LAN 2: Intel® i210IT |
| Front I/O | Display | VGA+DVI-D | VGA+DVI-D | VGA+DVI-D | - |
| | LAN | 2 | 2 | 2 | - |
| | USB | 8 x USB 3.0 | Q170: 8 x USB 3.0 H110: 4 x USB 3.0, 4 x USB 2.0 | 2 x USB 3.0 6 x USB 2.0 | 2 x USB 2.0 |
| | COM | 2 x RS-232/422/485 2 x RS-232 | 2 x RS-232/422/485 2 x RS-232 | 2 x RS-232/422/485 2 x RS-232 | - |
| | PS/2 | - | - | - | - |
| | Audio | Line out/mic in | Line out/mic in | Line out/mic in | - |
| Rear I/O | Display | - | - | - | DVI-I + DVI-D |
| | LAN | - | - | - | 2 |
| | USB | - | - | - | 2 x USB 3.0 4 x USB 2.0 |
| | COM | - | - | - | 2 x RS-232/422/485 |
| | PS/2 | - | - | - | 1 |
| | Audio | - | - | - | Line out/mic in |
| Watchdog Timer | Output | System reset | System reset | System reset | System reset |
| | Interval | Programmable 1~ 255 s/min | Programmable 1~ 255 s/min | Programmable 1~ 255 s/min | Programmable 1~ 255 s/min |
| Power Supply | Output Wattage | - | - | - | 150W |
| | Input Range | 9 ~ 36 V _{DC} | 9 ~ 36 V _{DC} | 9 ~ 36 V _{DC} | 100 ~ 240 V _{AC} |
| | Remote Power Switch | - | - | 1 | - |
| Cooling | System Fan | - | - | - | - |
| | Air Filter | - | - | - | - |
| Physical Characteristics | Dimensions (W x H x D) | 73 x 192 x 230 mm (2.91" x 7.55" x 9.05") | 77 x 192 x 230 mm (3.07" x 7.55" x 9.05") | 73 x 192 x 230 mm (2.91" x 7.55" x 9.05") | 427 x 88 x 325 mm (16.81" x 3.46" x 12.79") |
| | Weight | 2.9 kg | 2.9 kg | 2.9 kg | 10 kg |

✓ : supported, - : not supported, △ : optional

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O Modules

8

Industrial I/O and Video Solutions

i-Modules for MIC-7 Series

Compatible with MIC-7 Series Fanless Systems



| i-Module | | MIC-75M10 | MIC-75M20 | MIC-73M20 | MIC-75M20-01 | MIC-75M11 | MIC-73M11 |
|--|-----------|-------------------|-----------------------------|-------------|--------------------|-------------------------|------------------------|
| MIC-7900 | | 1 x PCIe x16 | 1 x PCIe x16 1 x PCIe x4 | - | 2 x PCIe x8 | 1 x PCIe x16 1 x PCI | - |
| MIC-7500 | | | | | | | |
| MIC-7700 | MIC-7700Q | | | | - | | |
| | MIC-7700H | | | | | | |
| MIC-7300 | | - | - | 2 x PCIe x1 | - | - | 1 x PCIe x1 1 x PCI |
| MIC + i-Module Dimension (H x W x D)* | | 192 x 97 x 230 mm | | | 192 x 123 x 230 mm | | |
| System Fan (Optional)** | | - | 4 cm (98R1752000E) | | | | |



| i-Module | | MIC-75M13 | MIC-73M13 | MIC-75M40 | MIC-75S20 |
|--|-----------|---|--|--|--|
| MIC-7900 | | 1 x PCIe x16 3 x PCI 2 x 2.5" HDD/SSD | - | 1 x PCIe x8 3 x PCI 2 x 2.5" HDD/SSD | 1 x PCIe x16 3 x PCI 2 x 2.5" HDD/SSD 2 x 2.5" hot Swap HDD/SSD |
| MIC-7500 | | | | | |
| MIC-7700 | MIC-7700Q | | | | |
| | MIC-7700H | | | - | |
| MIC-7300 | | - | 1 x PCIe x1 3 x PCI 2 x 2.5" HDD/SSD | - | - |
| MIC + i-Module Dimension (H x W x D)* | | 192 x 163 x 230 mm | | | |
| System Fan (Optional)** | | 8 cm (98R1751300E) | | | |

*When an i-module is assembled with an MIC-7700, the total width will be increased by 4 mm.

**A fan must be added if expansion cards exceed 45 W of power consumption

Intelligent Inspection Systems

Advantech's AIIS series are closely aligned with machine automation applications such as automated optical inspection, wafer inspection, and alignment inspection, all of which rely heavily on machine vision. With PoE/USB 3.0 vision and a rich I/O interface, the AIIS series is characterized by high-performance computing with low power consumption as well as intelligent management and extended product longevity. Our AIIS series of machine vision controllers save on space and make installation economical and easy—perfect for vision inspection applications. With a powerful CPU and built-in PoE/USB 3.0 ports, the AIIS series enhances overall application value by delivering outstanding machine vision performance. With the latest Intel Core processors, this series delivers state-of-art computing and graphics performance.



AIIS Series Product Features



Mainstream Interface

- GigE Vision Compliant
- USB3 Vision Compliant




Outstanding Performance

- Speed and reliable transmission for image acquisition and analysis



High Interoperability

- Compliant with main vision camera partners



Compact Size

- Compact size with a rich I/O interface
- Space-saving and easy-to-install

1
Software and Industry
Solutions

2
Industrial Server

3
Intelligent System

4
Intelligent HMI and
Monitors

5
Automation Computers
and Controllers

6
Industrial
Communication

7
Remote I/O Modules

8
Industrial I/O and
Video Solutions

Intelligent Inspection Systems



| Model Name | | AIIS-1200P | AIIS-1200U | AIIS-5410P |
|--------------------------|------------------------|--|--|--|
| Form Factor | | Compact | Compact | Compact |
| Processor System | Chipset | - | - | QM170 |
| | CPU | Intel Braswell N3160/N3710 SoC | Intel Braswell N3160/N3710 SoC | Intel 6th Generation Core i7/i5 BGA1440 processor |
| | Core | 4 | 4 | 4 |
| | Cache | 2 MB | 2 MB | 8MB |
| | Memory | DDR3L 1600 Onboard 8 GB | DDR3L 1600 Onboard 8 GB | Dual Channel DDR4 1866/2133 MHz (non-ECC) Max. 32 GB |
| Graphics | Graphics controller | Integrated Intel HD Graphics | Integrated Intel HD Graphics | Integrated Intel HD Graphics |
| | VRAM | Shared system memory is subject to OS | Shared system memory is subject to OS | Shared system memory is subject to OS |
| Expansion | PCIe x16 | - | - | - |
| | PCIe x8 | - | - | 1 |
| | PCIe x4 | - | - | - |
| | PCIe x1 | - | - | - |
| | PCI* | - | - | 1 x riser card |
| | mini PCIe | 1 | 1 | 1 |
| Storage | HDD Bay | 1 x internal 2.5" HDD bay | 1 x internal 2.5" HDD bay | 2 x internal 2.5" HDD bay |
| | mSATA | 1 | 1 | 1 |
| | CFast | - | - | 1 |
| | RAID | - | - | RAID 0/1 |
| Ethernet | Ethernet interface | 10/100/1000 Mbps | 10/100/1000 Mbps | 10/100/1000 Mbps |
| | Controller | 1 x Intel I210 | 1 x Intel I210 | 2 x Intel I210 |
| Machine Vision Connector | Interface | 2-ch PoE | 2-ch USB 3.0 | 4-ch PoE |
| | Controller | Intel I210 | Renesas uPD720202 | Intel I210 |
| Front I/O | Display | VGA | VGA | VGA + DVI-D |
| | LAN | 1 | 1 | 2 |
| | USB | 2 x USB 3.0 | 2 x USB 3.0 | 8 x USB 3.0 |
| | COM | 1 x RS-232/422/485 1 x RS-232 | 1 x RS-232/422/485 1 x RS-232 | - |
| | PS/2 | - | - | - |
| | Audio | - | - | Line out/mic in |
| | | | | |
| Rear I/O | Display | 1 x DP | 1 x DP | - |
| | LAN | - | - | - |
| | USB | 2 x USB 3.0 | 2 x USB 3.0 | - |
| | COM | - | - | 2 x RS-232/422/485 |
| | PS/2 | - | - | - |
| | Audio | Line out/mic in | Line out/mic in | - |
| | Digital I/O | 8 channels (isolated) | 8 channels (isolated) | 8 channels |
| Watchdog Timer Output | Output | System reset | System reset | System reset |
| | Interval | Programmable 1 ~ 255 s/min | Programmable 1 ~ 255 s/min | Programmable 1 ~ 255 s/min |
| Power Supply | Output Wattage | - | - | - |
| | Input Range | 9 ~ 36 V _{DC} | 9 ~ 36 V _{DC} | 9 ~ 36 V _{DC} |
| | Remote Power Switch | 1 | 1 | 1 |
| Cooling | System Fan | - | - | - |
| | Air Filter | - | - | - |
| Physical Characteristics | Dimensions (W x H x D) | 137 x 58 x 118 mm (5.39" x 2.28" x 4.65") | 137 x 58 x 118 mm (5.39" x 2.28" x 4.65") | 235 x 88 x 188 mm (9.25" x 3.46" x 7.4") |
| | Weight | 1.1 kg | 1.1 kg | 2.9 kg |

✓: supported, -: not supported, △: optional



| Model Name | | AIIS-3400P | AIIS-3400U | AIIS-3410P | AIIS-3410U |
|--------------------------|------------------------|--|--|--|--|
| Form Factor | | Compact | Compact | Compact | Compact |
| Processor System | Chipset | H110 | H110 | H110 | H110 |
| | CPU | Intel 6th/7th generation Core i CPU (LGA1151) | Intel 6th/7th generation Core i CPU (LGA1151) | Intel 6th/7th generation Core i CPU (LGA1151) | Intel 6th/7th generation Core i CPU (LGA1151) |
| | Core | Max.4 | Max.4 | Max.4 | Max.4 |
| | Cache | Max. 8 MB | Max. 8 MB | Max. 8 MB | Max. 8 MB |
| | Memory | Dual channel DDR4 1866/2133 MHz (non-ECC) Max. 32 GB | Dual channel DDR4 1866/2133 MHz (non-ECC) Max. 32 GB | Dual channel DDR4 1866/2133 MHz (non-ECC) Max. 32 GB | Dual channel DDR4 1866/2133 MHz (non-ECC) Max. 32 GB |
| Graphics | Graphics controller | Integrated Intel HD Graphics | Integrated Intel HD Graphics | Integrated Intel HD Graphics | Integrated Intel HD Graphics |
| | VRAM | Shared system memory is subject to OS | Shared system memory is subject to OS | Shared system memory is subject to OS | Shared system memory is subject to OS |
| Expansion | PCIe x16 | - | - | - | - |
| | PCIe x8 | - | - | 1 | 1 |
| | PCIe x4 | - | - | - | - |
| | PCIe x1 | - | - | - | - |
| | PCI* | - | - | 1 x riser card (optional) | 1 x riser card (optional) |
| Storage | mini PCIe | - | - | 1 | 1 |
| | HDD Bay | 1 x internal 2.5" HDD bay | 1 x internal 2.5" HDD bay | 1 x internal 2.5" HDD bay | 1 x internal 2.5" HDD bay |
| | mSATA | - | - | - | - |
| | CFast | 1 | 1 | 1 | 1 |
| Ethernet | RAID | - | - | - | - |
| | Ethernet interface | 10/100/1000 Mbps | 10/100/1000 Mbps | 10/100/1000 Mbps | 10/100/1000 Mbps |
| Machine Vision Connector | Controller | LAN1: Intel i219LM LAN2: Intel i210 | LAN1: Intel i219LM LAN2: Intel i210 | LAN1: Intel i219LM LAN2: Intel i210 | LAN1: Intel i219LM LAN2: Intel i210 |
| | Interface | 4-ch PoE | 4-ch USB | 4-ch PoE | 4-ch USB |
| Front I/O | Controller | Intel I210 | Renesas μPD720202 | Intel I210 | Renesas μPD720202 |
| | Display | VGA + DVI-D | VGA + DVI-D | VGA + DVI-D | VGA + DVI-D |
| | LAN | 2 | 2 | 2 | 2 |
| | USB | 4 x USB 3.0 | 4 x USB 3.0 | 4 x USB 3.0 | 4 x USB 3.0 |
| | COM | 2 x RS-232/422/485 | 2 x RS-232/422/485 | 2 x RS-232/422/485 | 2 x RS-232/422/485 |
| | PS/2 | - | - | - | - |
| | Audio | Line in/line out/mic in | Line in/line out/mic in | Line in/line out/mic in | Line in/line out/mic in |
| Rear I/O | Display | - | - | - | - |
| | LAN | - | - | - | - |
| | USB | - | - | - | - |
| | COM | - | - | - | - |
| | PS/2 | - | - | - | - |
| | Audio | - | - | - | - |
| | Digital I/O | 8 Channels (isolated) | 8 Channels (isolated) | 8 Channels (isolated) | 8 Channels (isolated) |
| Watchdog Timer Output | Output | System reset | System reset | System reset | System reset |
| | Interval | Programmable 1 ~ 255 s/min | Programmable 1 ~ 255 s/min | Programmable 1 ~ 255 s/min | Programmable 1 ~ 255 s/min |
| Power Supply | Output Wattage | - | - | - | - |
| | Input Range | 19 ~ 24 V _{DC} | 19 ~ 24 V _{DC} | 19 ~ 24 V _{DC} | 19 ~ 24 V _{DC} |
| | Remote Power Switch | 1 | 1 | 1 | 1 |
| Cooling | System Fan | 1 (6cm / 27.7 CFM) | 1 (6cm / 27.7 CFM) | 1 (8cm / 57 CFM) | 1 (8cm / 57 CFM) |
| | Air Filter | - | - | - | - |
| Physical Characteristics | Dimensions (W x H x D) | 230 x 70 x 175 mm (9.06" x 2.76" x 6.89") | 230 x 70 x 175 mm (9.06" x 2.76" x 6.89") | 240 x 97 x 190 mm (9.45" x 3.82" x 7.48") | 240 x 97 x 190 mm (9.45" x 3.82" x 7.48") |
| | Weight | 1.8 kg | 1.8 kg | 2.4 kg | 2.4 kg |

✓: supported, -: not supported, △: optional

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O Modules

8

Industrial I/O and Video Solutions

PCI Express Expansion Card

PCI Express USB 3.0 Expansion Card



| Part Number | | PCE-USB4 | PCE-USB8 |
|-------------|-------------------------|--|--|
| USB 3.0 | Interface | PCI Express x4 | |
| | Connector | 4 x USB3.0 | 8 x USB3.0 |
| | Host Bus | 4-lane Gen 2 PCIe interface, compliant with PCI Express Base Specification, Revision 2.0 | |
| | Controller | 4 x Renesas μ PD720202 host controllers | |
| | Data Transfer Rate | Super speed (5.0 Gbps)/high speed (480.0 Mbps)/full speed (12.0 Mbps)/low speed (1.5 Mbps) | |
| Environment | Temperature (Operating) | 0 ~ 60°C (32 ~ 140°F) | |
| | Temperature (Storage) | -40 ~ 85°C (-40 ~ 185°F) | |
| | Certifications | CE/FCC, Class B | |
| | Dimensions | 118 x 111 mm (4.64" x 4.37") | 118 x 111 mm (4.64" x 4.37", dual layer) |

PCI Express GbE Expansion Card



| Part Number | | PCE-GIGE2 | PCE-GIGE4 |
|-------------|-------------------------|--|--------------------|
| GIGE | Interface | PCI Express x4 | |
| | Connector | 2 x RJ45 LAN ports | 4 x RJ45 LAN ports |
| | Host Bus | 4-lane Gen 2 PCIe interface, compliant with PCI Express Base Specification, Revision 2.0 | |
| | Controller | 4 x Intel i210 Ethernet Controller | |
| | Data Transfer Rate | 10/100/1000 Mbps | |
| Environment | Temperature (Operating) | 0 ~ 60°C (32 ~ 140°F) | |
| | Temperature (Storage) | -40 ~ 85°C (-40 ~ 185°F) | |
| | Certifications | CE/FCC, Class A | |
| | Dimensions | 118 x 111 mm (4.64" x 4.37") | |

Control IPC Overview

Introduction

Advantech offers PAC solutions designed for industrial automation applications that combine the openness and flexibility of PCs with the reliability of traditional automation controllers such as PLCs. Advantech's APAX series utilizing sophisticated thermal designs to ensure system stability. The APAX series support Windows CE, Windows 7/10, and Linux operating systems. Advantech's control IPCs are ideal platforms for implementation in diverse applications such as power/energy, transportation, machine automation, factory automation, building automation, facility management systems, environment monitoring, and more.

Real-Time Control IPC: APAX Series

APAX series are Ethernet-enabled controllers that allow users to deploy I/O modules in flexible expansion combinations such as direct stack or daisy-chain. The control performance and functionality of this series are better than not only PLCs but also most PC-based controllers. Features including versatile CPU modules, I/O modules designed as reliable as PLC I/Os, high-density I/Os with LEDs, hot-swap, and stackable functionality are delivered. Both C/C++, the .NET library, and IEC 61131-3 languages are provided as programming tools.

Advantech CODESYS

For traditional PLC controllers, the development environment will vary depending on the PLC supplier, and different PLCs are not compatible with each other. Advantech's control IPC adopts the international standard IEC 61131-3, which is based on PLCopen and was established to standardize multiple languages, sets of instructions, and different concepts in the field of automation systems. Therefore, programming languages that comply with the IEC 61131-3 standard, usually called SoftLogic software, enable users to leverage PLC-world typical programming interfaces. Additional benefits of our control IPC include portability between platforms and a shortened learning curve relative to traditional PLCs.

Advantech CODESYS

Advantech supports all kinds of CODESYS runtime, including RTE, SoftMotion, and CNC, which are based on the Windows Embedded 7 operation system. Its runtime supports not only SoftLogic control but also visualization, including both Target (local HMI) and Web (browser-based). CODESYS can help to make Advantech control IPCs gain real-time logic control and HMI with a single control platform. Advantech has also developed cloud connectivity plugin packages, including the WebAccess/SCADA support, ODBC database direct connection function blocks, and OPC/UA server support. These can help users establish upstream communication for Industry 4.0 applications.

Control IPC

- X86 system architecture
- Compact and DIN rail mount for control cabinets
- Front I/O access
- Flexible interface



Modular I/O

- Modular local I/O
- Local and remote I/O system
- Analog/digital I/O, counter/communication



Open Platform

- Based on Windows and Linux
- Web service
- Database connection
- Utility for I/O configuration
- API examples and documents
- Graphical interface



Control
IPC

Modular
I/O

Open
Platform

SoftLogic
& HMI

SoftLogic and HMI

- CODESYS V3 development system
- IEC-61131-3 development tool
- Object-oriented programming
- Integrated I/O configuration and target visualization
- HTML5 web visualization
- OPC server



1
Software and Industry
Solutions

2
Industrial Server

3
Intelligent System

4
Intelligent HMI and
Monitors

5
Automation Computers
and Controllers

6
Industrial
Communication

7
Remote I/O Modules

8
Industrial I/O and
Video Solutions

APAX-5000 System



1



Power Supply Modules

- **APAX-5343** 115/230 V_{AC} power supply

2



Control Platform

- **APAX-5580** Intel® Core™ i7/i3/Celeron control IPC w/ 2 x GbE, 2 x mPCIe, VGA
- **APAX-5580CDS** High-performance SoftLogic PC-based controller, powered by CODESYS

3



PCI Express Interface Communication Modules

- **APAX-5430** SATA HDD module
- **APAX-5435** mPCIe module support for iDoor
- **APAX-5490** 4-port RS-232/422/485 communication module

4



Expansion Backplane

- **APAX-5402** Expansion backplane (only for APAX-5580 and PCIe modules)
- **APAX-5402L** Expansion backplane for PCIe and EtherIO (APAX IO)

5



I/O Backplane

- **APAX-5001** 1-slot backplane module
- **APAX-5002** 2-slot backplane module
- **APAX-5002L** 2-slot backplane module

6



Fieldbus Coupler Modules

- **APAX-5070** Modbus/TCP communication coupler
- **APAX-5071** PROFINET communication coupler
- **APAX-5072** EtherNet/IP communication coupler

7



Analog I/O Modules

- **APAX-5013** 8-ch RTD module
- **APAX-5017** 12-ch analog input module
- **APAX-5017H** 12-ch high-speed analog input module
- **APAX-5018** 12-ch thermocouple input module
- **APAX-5028** 8-ch analog output module

Digital I/O Modules

- **APAX-5040** 24-ch digital input module
- **APAX-5045** 24-ch digital I/O module
- **APAX-5046** 24-ch digital output module
- **APAX-5046SO** 20-ch source-type digital output module
- **APAX-5060** 12-ch relay output module
- **APAX-5080** 4/8-ch high/low-speed counter module

Remote Serial Modules

- **APAX-5090** 4-port RS-232/422/485 virtual COM with APAX bus (EtherIO)

APAX Series Selection Guide

APAX Control Platform

NEW


| Model | | APAX-5580 | | | APAX-5620 |
|---------------------------|------------------------|---|---|---|---|
| Description | | APAX-5580 controller with Intel® Celeron® CPU | APAX-5580 controller with Intel® Core™ i3 CPU | APAX-5580 controller with Intel® Core™ i7 CPU | APAX-5620 controller |
| System Hardware | CPU | Intel® Celeron® 2980U ULT 1.6GHz Haswell Dual Core, 2 MB L2 | Intel® Core™ i3-4010U ULT 1.7GHz Haswell Dual Core, 3 MB L2 | Intel® Core™ i7-4650U ULT 1.7GHz Haswell Dual Core, 4 MB L2 | Marvel XScale PXA270 520 MHz |
| | Memory | Onboard 4 GB | | | - |
| | Storage | 1 x mSATA, 1 x SD, 1 x SD (for OS backup) | | | 1 x Type II CompactFlash card slot |
| | USB Ports | 4 x USB ports (2 x USB 2.0, 2 x USB 3.0 compliant), 1 x internal USB | | | 1 x USB 1.1 |
| | VGA | 1 x VGA, supports 1920 X 1080 @ 60 Hz 24 bpp | | | DB15 connector |
| | Audio | Line out | | | - |
| General | Dimensions (W x H x D) | 128 x 106 x 110 mm | | | 60 x 139 x 100 mm |
| | Power Consumption | 28 W (typical), 72 W (max.) @ 24 V _{DC} ± 20% | | | 5 W @ 24 V _{DC} (typical) |
| | Status Display | LEDs for power, battery, LAN (Active, Status), Tx/Rx, and HDD | | | - |
| Software | Control Software | C/C++ library and .NET class library for C and .NET programming environment, CODESYS IEC 61131-3 SoftLogic control software | | | C/C++ and .NET library KW Multiprog (development tool), KW ProConOS (runtime kernel) Support CPU Redundancy |
| | OS Support | Microsoft® Windows 7/8, Linux Kernel 3.X | | | Windows CE |
| Environment | Shock Protection | Operating, IEC 60068-2-27, 50g, half sine, 11 ms | | | - |
| | Vibration Protection | Operating, IEC 60068-2-64, 2g _{rms} , random, 5 ~ 500 Hz, 1 hr/axis (mSATA) | | | - |
| Communications (Ethernet) | LAN Ports | 2 x RJ45, 10/100/1000 Mbps IEEE 802.3u 1000BASE-T Fast Ethernet | | | 2 x RJ-45 port, 10/100 Mbps |
| Communications (Serial) | COM Ports | 1 x RS-232/422/485, DB9, 50 ~ 115.2 kbps | | | 2 x isolated RS-485 (2-wire, isolated) |

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O Modules

8

Industrial I/O and Video Solutions

APAX Series Selection Guide

APAX Analog I/O Module



| Model | | APAX-5013 | APAX-5017 | APAX-5017H | APAX-5018 | APAX-5028 |
|---------------|------------------------|---|---|---|---|---|
| Description | | 8-ch RTD module | 12-ch analog input module | 12-ch high-speed analog input module | 12-ch thermocouple module | 8-ch analog output module |
| General | Dimensions (W x H x D) | 30 x 139 x 100 mm | | | | |
| | Power Consumption | 2.5 W @ 24 V _{DC} (typical) | 4 W @ 24 V _{DC} (typical) | 3.5 W @ 24 V _{DC} (typical) | 3.5 W @ 24 V _{DC} (typical) | 3.5 W @ 24 V _{DC} (typical) |
| Analog Input | Channels | 8 (differential) | 12 (differential) | 12 (differential) | 12 (differential) | - |
| | Input Type* | RTD (2-wire or 3-wire) | V, mV, mA | V, mV, mA | V, mV, mA, thermocouple | - |
| | Sampling Rates | 10 sample/second (total)** | 12 sample/second (total)** | 1,000 sample/second (per channel) | 12 sample/second (total)** | - |
| | Resolution | 16-bit (accuracy: ±0.1% of scale range) | 16-bit (accuracy: ±0.1% of scale range for voltage; ±0.2% of scale range for current) | 16-bit (accuracy: ±0.1% of scale range for voltage; ±0.2% of scale range for current) | 16-bit (accuracy: ±0.1% of scale range for voltage; ±0.2% of scale range for current) | - |
| | Input Impedance | >10 MΩ | >10 MΩ (voltage), 120 Ω (current) | 2 MΩ (voltage), 120 Ω (current) | >1 MΩ (voltage), 120 Ω (current) | - |
| | Wire Burnout Detection | ✓ | ✓ (4 ~ 20 mA only) | ✓ (4 ~ 20 mA only) | ✓ (4 ~ 20 mA and thermocouple) | - |
| Analog Output | Resolution | - | - | - | - | 14-bit (accuracy: ±0.1% of scale range) |
| | Channels | - | - | - | - | 8 |
| | Output Type* | - | - | - | - | V, mA |
| | Slew Rate | - | - | - | - | 0.7 V _{DC} /μs (per channel) |
| Environment | Operating Temperature | -10 ~ 60°C (when mounted vertically) | | | | |
| | Storage Temperature | -40 ~ 70°C | | | | |
| | Relative Humidity | 5 ~ 95% (non-condensing) | | | | |

* Each channel can be configured with different type and range

** Sampling rate depends on used channel number.

Example: Using 6 channels on APAX-5017, sampling rate for each used channel will be 12/6 = 2 samples/second.

APAX Digital I/O Module



| Model | | APAX-5040 | APAX-5045 | APAX-5046/ APAX-5046SO | APAX-5060 | APAX-5080 |
|-----------------------------|------------------------|--|--|--------------------------------------|------------------------------------|--|
| Description | | 24-ch digital input module | 24-ch digital I/O module | 24-ch/20-ch digital output module | 12-ch relay module | 4/8-ch counter module |
| General | Dimensions (W x H x D) | 30 x 139 x 100 mm | | | | |
| | Power Consumption | 2 W @ 24 V _{DC} (typical) | 2.5 W @ 24 V _{DC} (typical) | 2.5 W @ 24 V _{DC} (typical) | 2 W @ 24 V _{DC} (typical) | 2.5 W @ 24 V _{DC} (typical) |
| | Status Display | LED per channel On: Logic level 1 Off: Logic level 0 | | | | |
| Digital Input | Channels | 24 | 12 | - | - | 4 (sink) |
| | Input Voltage | Rated Value: 24 V _{DC} , For "0" signal: -5 ~ 5 V _{DC} , For "1" signal: 15 ~ 30 V _{DC} and -15 ~ 30 V _{DC} | Rated Value: 24 V _{DC} , For "0" signal: -5 ~ 5 V _{DC} , For "1" signal: 15 ~ 30 V _{DC} and -15 ~ 30 V _{DC} | - | - | For "0" signal: 0 ~ 3 V _{DC} , For "1" signal: 10 ~ 30 V _{DC} |
| | Type | Sink or source load | Sink or source load | - | - | - |
| Digital Output | Channels | - | 12 (sink) | 24 (sink) | - | 4 (sink) |
| | Voltage Range | - | 8 ~ 35 V _{DC} | 8 ~ 35 V _{DC} | - | 8 ~ 35 V _{DC} |
| | Rated Current Output | - | 0.5 A (per channel, at signal "1") | 0.5 A (per channel, at signal "1") | - | 0.5 A (per channel) |
| Relay Output | Channels | - | - | - | 12 | - |
| Counter/ Frequency Input | Channels and Mode | - | - | - | - | 8 (up and frequency mode), 4 (pulse/direction, up/down, A/B phase mode) |
| | Counting Range | - | - | - | - | 32-bit + 1-bit overflow |
| | Minimum Pulse Width | - | - | - | - | 1 μs for high-freq. mode and other modes |
| | Counter Frequency | - | - | - | - | 10 Hz ~ 1 MHz for high-freq. mode and other modes |
| | Input Voltage | - | - | - | - | For "0" signal: 0 ~ 3 V _{DC} , for "1" signal: 10 ~ 30 V _{DC} |
| Environment | Operating Temperature | -10 ~ 60°C (when mounted vertically) | | | | |
| | Storage Temperature | -40 ~ 70°C | | | | |
| | Relative Humidity | 5 ~ 95% (non-condensing) | | | | |

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O Modules

8

Industrial I/O and Video Solutions

APAX Series Selection Guide

APAX Coupler Module



| Model | | APAX-5070 | APAX-5071 | APAX-5072 |
|----------------|------------------------|--|--------------------------------|-----------------------------------|
| Description | | Modbus/TCP communication coupler | PROFINET communication coupler | EtherNET/IP communication coupler |
| General | Dimensions (W x H x D) | 30 x 139 x 100 mm | | |
| | Power Consumption | 2 W @ 5 V _{DC} (typical) | | |
| | Connectors | 2 x RJ-45 (2-ch switch, shared IP address) | | |
| Communications | Protocols | Modbus/TCP | PROFINET RT | Ethernet/IP |
| | Data Transfer Rates | 10/100 Mbps | | |
| | Connected I/O Modules | 32 (max.)* | | |
| | Digital Signals | 768 (max.) | | |
| | Analog Signals | 192 (max.) | | |
| Environment | Operating Temperature | -10 ~ 60°C (mounted vertically) | | |
| | Storage Temperature | -40 ~ 85°C | | |
| | Relative Humidity | 5 ~ 95% (non-condensing) | | |

*APAX digital I/O modules can use ID number 0 ~ 31, while AI/O modules and counter modules can only use ID numbers 0 ~ 15

APAX Communication Module



| Model | | APAX-5435 | APAX-5490 | APAX-5090 | APAX-5430 |
|-------------|------------------------|---|-----------------------------------|---|-------------------------------------|
| Description | | mPCIe module for iDoor technology expansion | RS-232/422/485 module | 4-port RS-232/422/485 virtual COM | SATA HDD module |
| General | Dimensions (W x H x D) | 30 x 139 x 100 mm | | | |
| | Power Consumption | 2.5 W @ 24 V _{DC} (typical) | 2 W @ 5 V _{DC} (typical) | 2 W @ 24 V _{DC} (typical) | 2.5 W @ 5 V _{DC} (typical) |
| | Connectors | 1 x 26-pin clamp-type terminal | | | |
| | Interface | mini PCI express 2.0 (Support iDoor), mSATA | RS-232/422/485 | COM 1, COM 2: RS-232/422/485 COM 3, COM 4: RS-232/422/485 (change mode via switch) | SATA |
| Environment | Operating Temperature | -10 ~ 60°C (mounted vertically) | | | |
| | Storage Temperature | -40 ~ 70°C | | | |
| | Relative Humidity | 5 ~ 95% (non-condensing) | | | |

APAX-5000 Control IPC Support Table

| Type | | Control IPC | | Coupler | | |
|-----------------------|-------------|---|--|--|--------------------------------------|---|
| System | | APAX-5580 | APAX-5620 | APAX-5070 | APAX-5071 | APAX-5072 |
| Function | I/O Module | Intel® Core™ i7/i3/ Celeron Control IPC w/ 2 x GbE, 2 x mPCIe, VGA | PAC with Marvel XScale® CPU and CAN | Modbus/TCP Communication Coupler | PROFINET Communication Coupler | EtherNet/IP Communication Coupler |
| Analog I/O | APAX-5013 | ✓ | ✓ | ✓ | ✓ | ✓ |
| | APAX-5017 | ✓ | ✓ | ✓ | ✓ | ✓ |
| | APAX-5017H | ✓ | ✓ | ✓ | ✓ | ✓ |
| | APAX-5018 | ✓ | ✓ | ✓ | ✓ | ✓ |
| | APAX-5028 | ✓ | ✓ | ✓ | ✓ | ✓ |
| Digital I/O | APAX-5040 | ✓ | ✓ | ✓ | ✓ | ✓ |
| | APAX-5045 | ✓ | ✓ | ✓ | ✓ | ✓ |
| | APAX-5046 | ✓ | ✓ | ✓ | ✓ | ✓ |
| | APAX-5060 | ✓ | ✓ | ✓ | ✓ | ✓ |
| | APAX-5046SO | ✓ | ✓ | ✓ | ✓ | ✓ |
| | APAX-5080 | ✓ | ✓ | ✓ | ✓ | ✓ |
| Communication | APAX-5490 | ✓ | - | - | - | - |
| | APAX-5090 | ✓ | - | - | - | - |
| | APAX-5435 | ✓ | - | - | - | - |
| SATA | APAX-5430 | ✓ | - | - | - | - |
| Backplane & Expansion | APAX-5001 | ✓ | ✓ | ✓ | ✓ | ✓ |
| | APAX-5002 | ✓ | ✓ | ✓ | ✓ | ✓ |
| | APAX-5002/L | ✓ | ✓ | ✓ | ✓ | ✓ |
| | APAX-5402 | ✓ | - | - | - | - |
| Power Supply | APAX-5343 | ✓ | - | - | - | - |
| | APAX-5342 | ✓ | - | - | - | - |
| | APAX-5343E | - | ✓ | ✓ | ✓ | ✓ |

1

Software and Industry
Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and
Monitors

5

Automation Computers
and Controllers

6

Industrial
Communication

7

Remote I/O Modules

8

Industrial I/O and
Video Solutions

WISE-PaaS/EdgeLink-Enabled Gateways

Take Machine to Intelligent (M2I) for the Next Business Success

In the Industrial IoT era, companies are seeking solutions that can help them to utilize data analytics to raise service levels, create better products, and reduce operational costs. The ideal first step is get assets digitalized. This means that increasingly more data need to be analyzed, and both the volume and diversity of such data from different equipment are also increasing. While from the perspectives of equipment manufacturers, owners, and maintainers need to have an easy and reliable way to collect equipment data from field sites, Advantech WISE-PaaS/EdgeLink provides a solution for Machine to Intelligent (M2I). Without frequent on-site maintenance and service trips incurring time and financial costs, users will be able to monitor critical assets, track equipment performance, receive alarm notifications in the event of a problem, and perform system management and configuration using handheld devices. Thus, costs can be substantially reduced and the field equipment and facilities can be better monitored and controlled.



Optimizing Efficiency with Connected Equipment

For industrial boilers, air compressors, chillers, power distribution cabinets and other equipment, Advantech WISE-PaaS/EdgeLink serves as a kernel of data acquisition, data storage, alarm, data reporting and other functions, maximizing equipment efficiency with reliable data.



"Click-and-go" Cloud Access Deployment


Advantech WISE-PaaS/EdgeLink Studio offers a "click-and-go" functionality to send data to the Cloud. The acquired data can be easily and effortlessly report to the cloud for further analytic and visualized management reference.



Integrating Equipment Data into Middleware with Secured Data Conversion

In the IIoT Era, the requirement of connecting equipment becomes massive, more diverse and complex. Advantech WISE-PaaS/EdgeLink Studio supports data conversion that enables mass equipment such as PLCs, sensors, inverters and etc. directly integrated with SCADA, MES and ERP so that the equipment can be properly maintained and operated.

WISE-PaaS/EdgeLink Framework

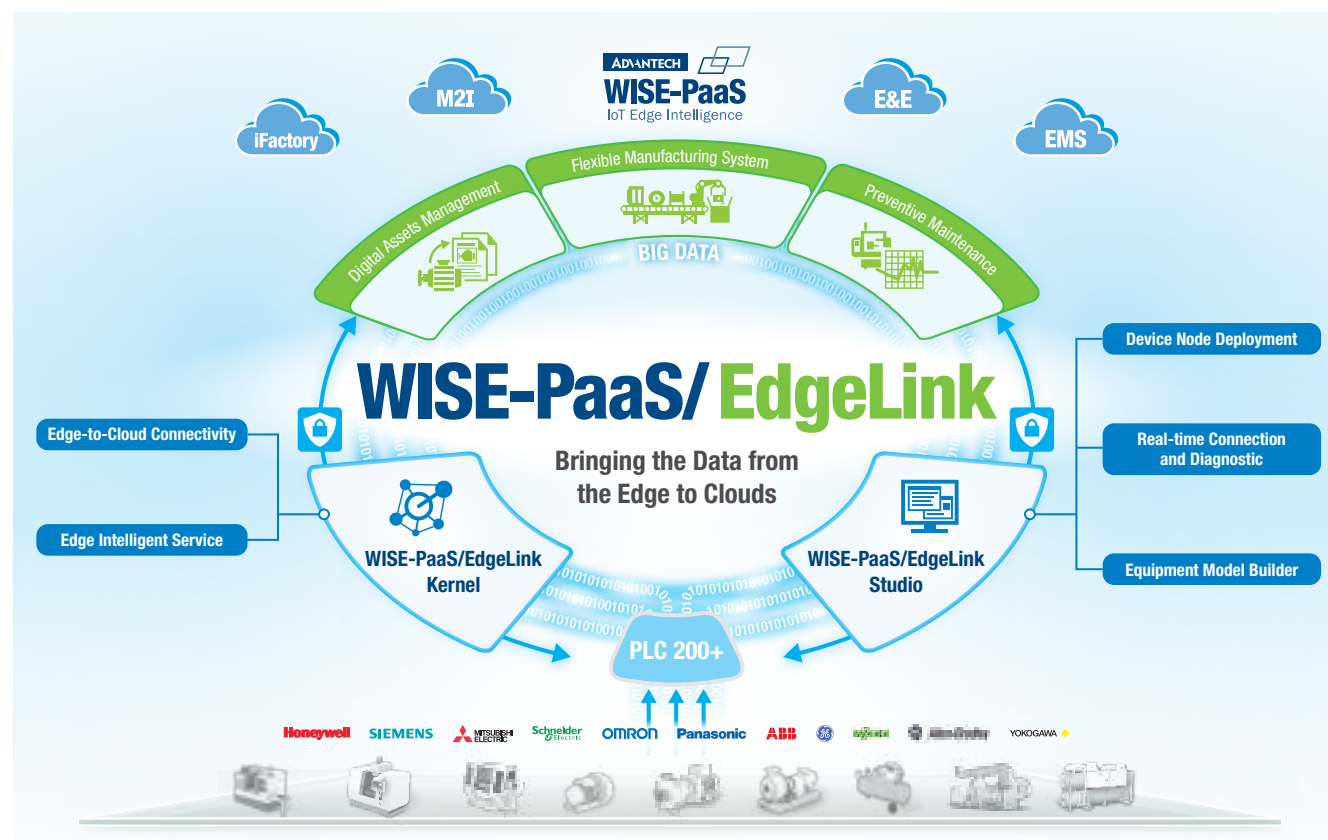


Advantech WISE-PaaS/EdgeLink is equipped key functionalities for edge applications. The technology includes a runtime kernel and a user interface – “WISE-PaaS/EdgeLink Studio.” With the integrated abilities of downlink to field equipment for data acquisition and uplink with connectivity, security, and intelligent functionalities, integrating field data and send them to the cloud becomes an easy task.

WISE-PaaS/EdgeLink Kernel



WISE-PaaS/EdgeLink Kernel Architecture

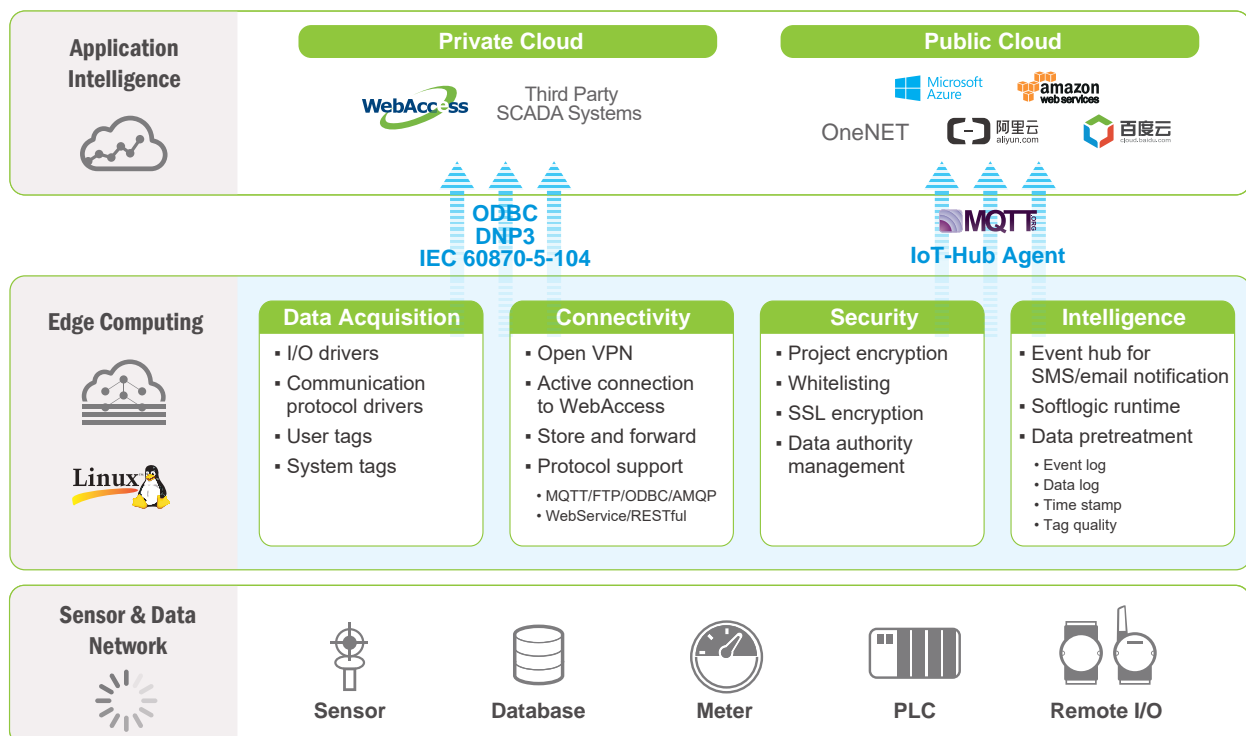




WISE-PaaS/EdgeLink Studio

Advantech WISE-PaaS/EdgeLink Studio is an advanced configuration tool that saves programming efforts and time for the users. It contains four major functionalities – Connectivity to handle uplink and downlink tasks, Equipment Model Builder that helps user to set for different equipment for different application in a snap, Cloud Agent that deals with the communication to public and private Cloud and Intelligent Service gives more advanced functionalities that ensure the data to be more secure and reliable.








Device Node Deployment



Connectivity

-  Uplink to Supervisory System
-  Downlink to Device or Equipment
-  Active Connection





Intelligent Service

-  Data Pre-treatment
-  Local Network
-  Data Logger
-  White List
-  Event Manager

Equipment Model Builder

-  Device Model Builder
-  Built-in Device Template
-  I/O Tag Settings

Cloud Agent

-  Public Cloud
-  Database
-  Private Cloud
-  File Server

Device Node Deployment

- Project import and export
- User-friendly UI
- Easy mass deployment

Real-time Connection and Diagnostic

- Network status and data quality diagnostics
- Fast sync with field equipment

Equipment Model Builder

- Plug and play
- Rich equipment nodes and model
- Customizable model template

WISE-PaaS/EdgeLink-Enabled Gateways



Expansion Module for ADAM-3600

| Model Name | | ADAM-3600 |
|-----------------------|------------------------------------|---|
| Description | | Open Basis Intelligent RTU |
| System | CPU | Cortex A8 |
| | Operating system | Linux RT 3.12 |
| | Programming interface | C (Linux) IEC-61131-3, IEC-60870-104 |
| | Communication protocols | Modbus/RTU, Modbus/TCP, DNP3 |
| | Wireless communication protocols | GPRS, LTE 3G, Wi-Fi, Zigbee |
| | Special functions | Monitoring (iCDManager), data identification, breakpoint transmission, initiative reporting |
| Serial Port | Number of ports | 3 |
| | Type | 1 x RS-232/485, 2 x RS-485 |
| Network Port | Number of channels | 2 |
| | Number of independent IP addresses | 2 |
| | Speed | 10/100 Mbps |
| | IP specifications | IPv4/IPv6 |
| I/O | Onboard I/O | 8 analog inputs, 8 digital inputs, 4 digital outputs |
| | Expansion slots | 4 |
| USB | USB2.0 | 1 |
| Display Interface | VGA | 1 |
| | LED | System, serial, Ethernet, digital I/O, programmable |
| Storage Interface | SD | 1 x SD slot |
| Operating Temperature | | -40~70 °C |
| Certification | | CE/FCC |
| Part Number | | ADAM-3600-C2GL1A1E |

| Model | Category | Channel | Part Number |
|-----------|-----------------------|-----------------|--------------|
| ADAM-3617 | Analog input module | 4 | ADAM-3617-AE |
| ADAM-3618 | Analog input module | 4, thermocouple | ADAM-3618-AE |
| ADAM-3624 | Analog output module | 4 | ADAM-3624-AE |
| ADAM-3651 | Digital input module | 8 | ADAM-3651-AE |
| ADAM-3656 | Digital output module | 8 | ADAM-3656-AE |
| ADAM-3613 | Analog input module | 4, RTD | ADAM-3613-AE |

| Analog Input | |
|---------------|---|
| Signal Input | Differential |
| Sampling Rate | 10 Hz |
| Voltage Input | +/- 10 V, +/- 2.5 V |
| Input Current | 0~20 mA, 4~20 mA |
| Sensor Input | Thermocouple (type J, K, T, E, R, S, B) RTD (Pt100, Pt1000, Balco 500, Ni 518) |
| Resolution | 16-bit |

| Analog Output | |
|----------------|------------------|
| Output Voltage | 0~10 V |
| Output Current | 0~20 mA, 4~20 mA |
| Resolution | 12-bit |

| Digital Input | |
|-------------------|-----------------------|
| Input Type | Sink |
| Rated Voltage | 12/24 V _{DC} |
| Logic "0" Voltage | 0~5 V _{DC} |
| Logic "1" Voltage | 11~30 V _{DC} |

| Digital Output | |
|----------------|-----------------------------------|
| Output Type | Open collect |
| Output Voltage | 8~30 V _{DC} @ max 200 mA |

Wireless Expansion Module



EWM-W150H2E

Half-sized mini card, supports 802.11bgn

| | |
|------------|----------------------|
| 1750006043 | SMA(M) cable, 15 cm |
| 1750000318 | 2-dBi antenna, 11 cm |



EWMC109F601E

6-band HSPA cellular module with SIM holder

| | |
|------------|-----------------------|
| 1750006264 | SMA(F) cable, 15 cm |
| 1750005865 | Dipole antenna, 11 cm |

1
Software and Industry
Solutions

2
Industrial Server

3
Intelligent System

4
Intelligent HMI and
Monitors

5
Automation Computers
and Controllers

6
Industrial
Communication

7
Remote I/O Modules

8
Industrial I/O and
Video Solutions

WISE-PaaS/TagLink-Enabled Gateways



NEW



NEW



| Model Name | | ECU-1152TL | ECU-1251TL | ECU-1051TL | ECU-1050TL |
|---------------------------------------|----------------------------------|---|--|--|--|
| Description | | Industrial Communication Gateway | Industrial Communication Gateway | Industrial communication gateway | Industrial communication gateway |
| System | CPU | Cortex A8 | Cortex A8 | Cortex A8 | Cortex A8 |
| | Operating system | Linux RT 3.12 | Linux RT 3.12 | Linux RT 3.12 | Linux RT 3.12 |
| | Programming interface | C (Linux) | C (Linux) | C (Linux) | C (Linux) |
| | Wireless communication protocols | Modbus/RTU, Modbus/TCP, IEC-60870-101/104 | Modbus/RTU, Modbus/TCP, IEC-60870-101/104 | Modbus/RTU, Modbus/TCP, IEC-60870-101/104 | Modbus/RTU, Modbus/TCP, IEC-60870-101/104 |
| | Wireless communication | GRPS, 3G, LTE, Wi-Fi | GRPS, 3G, LTE, Wi-Fi | GRPS, 3G, LTE, Wi-Fi | GRPS, 3G, LTE, Wi-Fi |
| | Special functions | Monitoring, data identification, breakpoint transmission, initiative reporting | Monitoring, data identification, breakpoint transmission, initiative reporting | Monitoring, data identification, breakpoint transmission, initiative reporting | Monitoring, data identification, breakpoint transmission, initiative reporting |
| Serial Port | Number of ports | 6 | 4 | 2 | - |
| | Type | RS-232/485 | RS-232/485 | RS-232/485 | - |
| Network Port | Number of channels | 2 | 2 | 2 | 1 |
| | Independent IP number | 2 | 2 | 2 | 1 |
| | Speed | 10/100 Mbps | 10/100 Mbps | 10/100 Mbps | 10/100 Mbps |
| | IP specifications | IPv4/IPv6 | IPv4/IPv6 | IPv4/IPv6 | IPv4/IPv6 |
| I/O | Onboard I/O | - | - | - | - |
| | Expansion slots | 1 x mini-pcie | 1 x mini-pcie | 1 x mini-pcie | 2 x mini-pcie |
| USB | USB2.0 | 1 | 1 | - | - |
| Display Interface | VGA | - | - | - | - |
| | LED | PWR/Serial/Prog/LAN | PWR/Serial/Prog/LAN | PWR/Prog/LAN | PWR/Prog |
| Storage Interface | SD | 1 x micro SD slot | 1 x micro SD slot | 1 x micro SD slot | 1 x micro SD slot |
| Industry communication protocol | | Modbus/ IEC-60870-104/BACnet IP/DNP3 | | | |
| Programmable logic controller support | | Siemens/Allen-Bradley/Schneider/Mitsubishi/Omron/Honeywell/Yokogawa/Delta/Panasonic | | | |
| Data logger | | Realtime data logger | | | |
| Programing Support | | Linux C, Web service API | | | |
| Operating Temperature | | -40 ~ 70 °C | -40 ~ 70 °C | -40 ~70 °C | -40 ~70 °C |
| Certification | | CE/FCC | CE/FCC | CE/FCC | CE/FCC |
| Part Number | | ECU-1152TL-R11ABE | ECU-1251TL-R10AAE | ECU-1051TL-R10AAE | ECU-1050TL-R10AAE |

Wireless Expansion Module



EWM-G108H01E

GPS/GNSS half-sized mini PCIe card

1750006264 SMA(F) cable, 15 cm
1750006432 4.5-dBi antenna, 5 m



EWM-C117FLOxE

LTE/HSPA+/GPRS module, w/o SIM Slot

1750006264 SMA(F) cable, 15 cm
1750008424-01 LTE antenna, 14 cm


ADAM-5000 Series

Distributed I/O Systems & PC-based Controllers

Introduction

In the IIOT application, the first step of everything is data acquisition. People use high computing power at server side, and also need edge data collection and procession. One intelligent platform with modular design can save space in control cabinet and make installation easier. For sure this edge intelligent DAQ platform must support several communication interface to connect with upper layer system.

The ADAM-5000 series, a compact distributed data acquisition and control system, supports the shift toward Fieldbus-based systems. Based on popular Fieldbus data communication structures such as RS-485 and Modbus, the ADAM-5000 series now offers two different DA&C systems that allow field I/O devices to easily connect to PC network applications: the ADAM-5000 DA&C systems and the ADAM-5630 series of PC-based controllers.

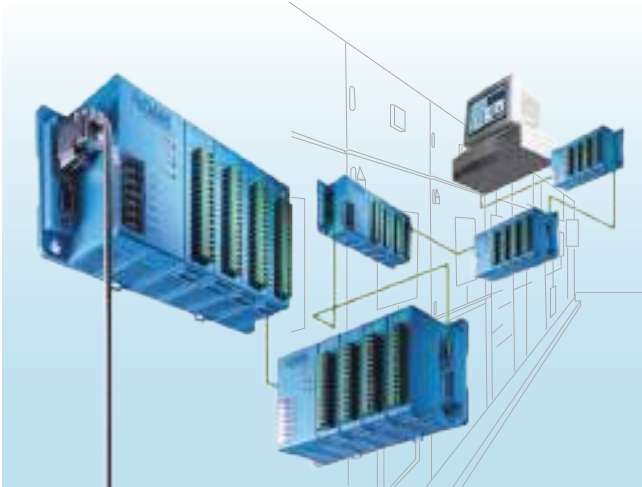

Open DAQ Controller for Industry 4.0


With the evolution of Industrial IoT, the demand of monitoring becomes enormous and complex in scale and variety. Hence the first stop of data acquisition requires higher ability to make the data valid. An ideal device of data acquisition for the new era covers higher computing capability, modularized I/O and customized ability.

The ADAM-5630 series of RISC-based programmable edge intelligent controllers includes ADAM-5630E, ADAM-5630. They feature cortex A8 CPU with DDR3 memory running real time Linux, which provides customer a high performance open platform.

Users can use Linux SDK and ADAM-5000 API(C and Python) to develop the application program. And ADAM-5630 also provides web service to help to set the configuration by web browser. The two onboard Ethernet ports which enables features like: FTP server, web server, TCP/UDP connections and Email alarm. ADAM-5630 controllers also have high expansion capability by supporting Modbus/RTU master/slave and Modbus/TCP client/server functions.

The ADAM-5560CE features Intel CPU running Windows CE. Users can use Microsoft Visual Studio .NET to develop the application program.

The ADAM-5560 also support CODESYS allow users to leverage the IEC 61131-3 SoftLogic programming environment to complete their automation task.

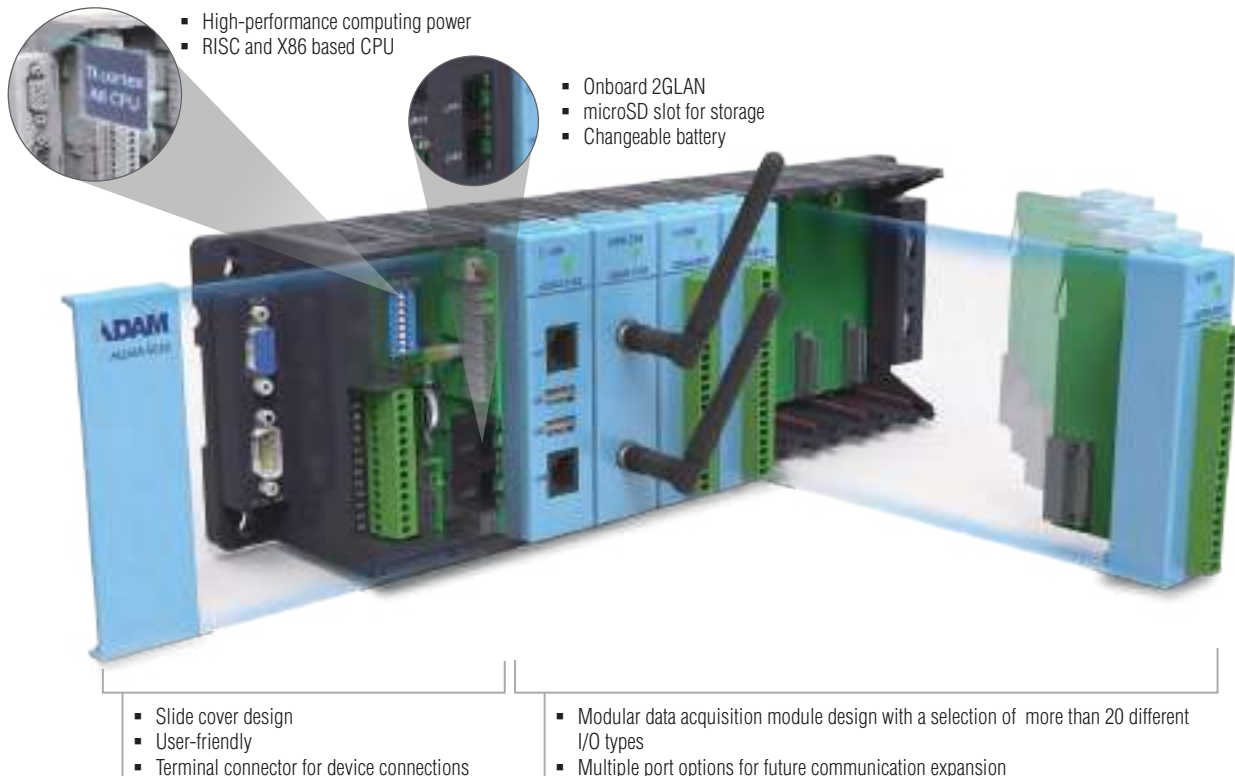

Maximum System Design Flexibility

The ADAM-5000's modular design allows users to tailor solutions based on their own requirements. Built-in programmable I/O ranges and alarm outputs enhance flexibility in system design. A variety of communication media such as twisted-pair wiring, radio modems and fiber optics are supported.

System Maintenance and Troubleshooting

The ADAM-5000 series uses hardware self-test and software diagnosis to monitor system problems. Also included is a watchdog timer that monitors the microprocessor. If the system crashes, the watchdog automatically resets the system. Node ID setting is easily accomplished by setting a DIP switch on the front of the system.

Easy Installation and Networking

The ADAM-5000 series can be easily mounted on a DIN-rail or panel. Signal connections, network modifications and maintenance are simple and quick. Building a multi-drop network only requires a single twisted pair of wires.

Proven for Industrial Environments

The ADAM-5000 series can operate in industrial environments at temperatures between -10 and 70°C, and can use unregulated power sources between 10 and 30 V_{DC}. These units are protected against accidental power supply reversals. A 3-way isolation design (I/O, power & communication) prevents ground loops and reduces the effect of electrical noise in the system.

Extensive Software Support

The ADAM-5000 series is supported by most standard process controls and HMI software. .NET Class LIB is provided for use with Windows applications. OPC drivers provide links to a wide range of HMI/SCADA software packages such as InTouch, FIX and ICONICS. Advantech data acquisition software and Advantech Studio SCADA/HMI software are both tightly integrated with the ADAM-5000 systems.

Distributed I/O Systems



Ethernet-based Data Acquisition and Control System

With the ADAM-5000/TCP as your Ethernet I/O data processing center, you can monitor and control field signals at speeds of 10/100 Mbps. The best field-proven communication performance that can be reached in industrial network environments. Additionally, the popular Modbus/TCP protocol is also supported.

RS-485 based Data Acquisition and Control System


The ADAM-5000/485 system is a data acquisition and control system that can acquire, monitor and control data through multi-channel I/O modules. It communicates with a network master over a twisted-pair, multi-drop RS-485 network. Both ADAM ASCII and Modbus/RTU protocols are supported.

Simple and Cost Effective Network

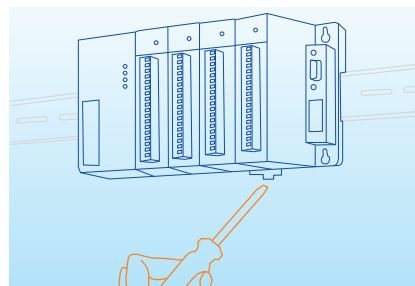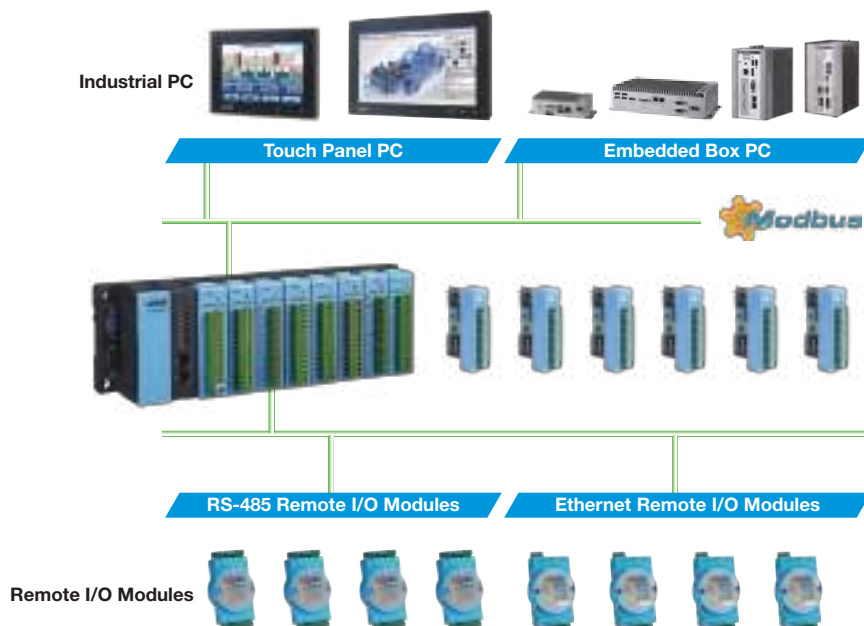


DIN-rail Mounting

Installed on industrial standard DIN-rails

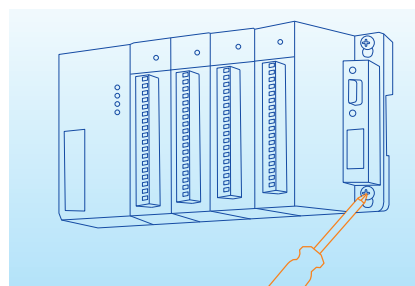


Panel/Wall Mounting

Flat surface system mounting

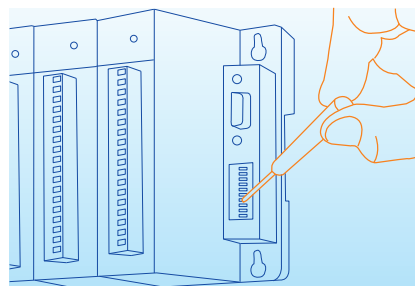

Node ID Setting

8-pin dip switch configuration

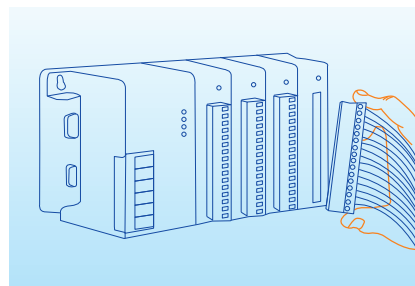

Connection

Pre-wired plug-in terminals with I/O modules

ADAM-5000 Controller Selection Guide



| System | | ADAM-5630 | ADAM-5630E | ADAM-5510/TCP ADAM-5510KW/TCP | ADAM-5510E/TCP ADAM-5510EKW/TP | ADAM-5560 |
|-------------------|-----------------------|---|--------------------------|---|--|--|
| CPU | | cortex A8 600 MHz | cortex A8 600 MHz | 80188 | | Intel Atom Z510P 1.1 GHz |
| RAM | | 512 MB DDR3L | 512 MB DDR3L | 640 KB | | 1 GB DDR2 SDRAM |
| Flash ROM | | N/A | N/A | 256 KB | | - |
| Flash Memory | | N/A | N/A | 256 KB | | - |
| Flash Disk | | 1 GB | 1 GB | 1 MB | | - |
| OS | | RT-Linux | RT-Linux | ROM-DOS | | WinCE5.0/XP embedded |
| Control Software | | Linux C SDK | Linux C SDK | ADAM-5510/TCP: Borland C ADAM-5510KW/TCP: KW SoftLogic | ADAM-5510E/TCP: Borland C ADAM-5510EKW/TP: KW SoftLogic | ADAM-5560CE: C/C++ and .NET ADAM-5560KW: KW SoftLogic |
| Real-time Clock | | YES | YES | Yes | | |
| Watchdog Timer | | YES | YES | Yes | | |
| COM1 | | RS-232/485 | RS-232/485 | RS-232 | RS-232/RS-485 | RS-232/485 |
| COM2 | | RS-485 | RS-485 | RS-485 | | |
| COM3 | | RS-485 | RS-485 | RS-232 (TX, RX, GND) | | RS-232/485 |
| COM4 | | RS-232/485 | RS-232/485 | RS-232/485 | | |
| I/O Slots | | 4 | 8 | 4 | 8 | 7 |
| Power Consumption | | 8W (for 5630 series only) | | 8 W | | 17 W |
| Isolation | Communication | 2500 V _{DC} (COM1~COM3) (for 5630 series only) | | 2,500 V _{DC} (COM2 RS-485) | | 2,500 V _{DC} (COM2 RS-485) 1,500 V _{DC} (COM1, COM3, COM4 RS-485) |
| | Communication Power | 3,000 V _{DC} | | | | |
| | I/O Module | 3,000 V _{DC} | | | | |
| Diagnosis | Status Display | Power, RUN, Error, BAT, user define (for 5630 series only) | | Power, CPU, Communication, Battery | | Power, User Define |
| | Self Test | Yes, while ON | | | | |
| | Software Diagnosis | Yes | | | | |
| Communication | Interface | RS-232/485 | | Ethernet (RJ-45) | | Ethernet (2 x RJ-45) |
| | Speeds | 300 bps ~ 115.2 kbps | | 10/100 Mbps | | 10/100 Mbps |
| | Max. Distance | 4,000 feet (1.2 km) | | 100 m | | 100 m |
| | Max. Nodes | 32 | 32 | 256 for Ethernet, 32 for RS-485 | 256 for Ethernet, 32 for RS-485 | 256 for Ethernet, 32 for RS-485 |
| | Protocol | User Defined, Modbus/RTU | User Defined, Modbus/RTU | User Defined, Modbus/RTU, Modbus/TCP | User Defined, Modbus/RTU, Modbus/TCP | Modbus/RTU, Modbus/TCP |
| | Remote I/O | Modbus Device | | | | |
| | Power Requirements | 10 ~ +30 V _{DC} | | | | |
| Environment | Operating Temperature | -20 ~ 70°C | | -10 ~ 70°C (14 ~ 158°F) | | 0 ~ 55°C (32 ~ 131°F) |
| | Storage Temperature | -25 ~ 85°C (-13 ~ 185°F) | | | | |
| | Humidity | 5 ~ 95% | | | | |
| Dimensions (mm) | | 231 x 110 x 75 | 355 x 110 x 75 | 231 x 110 x 75 | 355 x 110 x 75 | 355 x 110 x 75 |

1

Software and Industry
Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and
Monitors

5

Automation Computers
and Controllers

6

Industrial
Communication

7

Remote I/O Modules

8

Industrial I/O and
Video Solutions

ADAM-5000 I/O Module Selection Guide



| System | | ADAM-5000/485 | ADAM-5000E | ADAM-5000L/TCP | ADAM-5000/TCP |
|-----------------------------|-----------------------|--|---|---|----------------|
| CPU | | 80188 | 80188 | RISC CPU | |
| RAM | | - | - | 4 MB | |
| Flash ROM (User AP) | | - | - | 512 KB | |
| Flash Memory (Data Storage) | | - | - | - | |
| Flash Disk | | - | - | - | |
| OS | | - | - | real-time OS | |
| Timer BIOS | | - | - | - | |
| Real-time Clock | | - | - | - | |
| Watchdog Timer | | Yes | | | |
| I/O Slots | | 4 | 8 | 4 | 8 |
| Power Consumption | | 3 W | | 4.0 W | 5.0 W |
| Isolation | Communication | 2,500 V _{DC} | 3,000 V _{DC} | RS-485: 1,500 V _{DC} | |
| | Communication Power | 3,000 V _{DC} | | | |
| | I/O Module | 3,000 V _{DC} | | | |
| Diagnosis | Status Display | Power, CPU, Communication | | Power, CPU, Error Diagnostic, Communication | |
| | Self Test | Yes, while ON | | | |
| | Software Diagnosis | Yes | | | |
| Communication | Interface | RS-232/485 (2-wire) | RS-232/485 (2-wire) | Ethernet | |
| | Speeds (bps) | 1,200, 2,400, 4,800, 9,600, 19.2 K, 38.4 K, 57.6 K, 115.2 K | 1,200, 2,400, 4,800, 9,600, 19.2 K, 38.4 K, 57.6 K, 115.2 K | 10 M, 100 M | |
| | Max. Distance | 4,000 feet (1.2 km) | 4,000 feet (1.2 km) | 100 m without repeater | |
| | Data Format | Advantech protocol: N, 8, 1 Modbus protocol: N, 8, 1 N, 8, 2 E, 8, 1 O, 8, 1 | Advantech protocol: N, 8, 1 Modbus protocol: N, 8, 1 N, 8, 2 E, 8, 1 | TCP/IP | |
| | Max. Nodes | 128 | 128 | Depend on IP address | |
| | Protocols | ADAM ASCII/Modbus Protocol | ADAM ASCII/Modbus Protocol | Modbus/TCP | |
| | Remote I/O | - | - | 20 nodes Modbus devices | |
| | Power Requirements | +10 ~ +30 V _{DC} | | | |
| Environment | Operating Temperature | -10 ~ 70°C (14 ~ 158°F) | | | |
| | Storage Temperature | -25 ~ 85°C (-13 ~ 185°F) | | | |
| | Humidity | 5 ~ 95% | | | |
| Dimensions (mm) | | 231 x 110 x 75 | 355 x 110 x 75 | 231 x 110 x 75 | 355 x 110 x 75 |

Analog Input/Output Modules



| Module | | ADAM-5013 | ADAM-5017 | ADAM-5017P | ADAM-5017UH | ADAM-5018 |
|--------------|---------------------|-----------------------|---------------------------------------|--|-----------------------|--|
| Analog Input | Resolution | 16 bit | 16 bit | 16 bit | 12 bit | 16 bit |
| | Input Channel | 3 | 8 | 8 | 8 | 7 |
| | Sampling Rate | 10 (total*) | 10 (total*) | 10 (total*) | 200K** | 10 (total*) |
| | Voltage Input | - | ±150 mV, ±500 mV ±1 V, ±5 V, ±10 V | ±150 mV, ±500 mV ±15V, ±10V, ±5 V, ±1 V 0 ~ 150mV, 0 ~ 500mV 0 ~ 1V, 0 ~ 5V, 0 ~ 10V 0 ~ 15V | ±10 V, 0 ~ 10 V | ±15 mV, ±50 mV ±100 mV, ±500 mV ±1 V, ±2.5 V |
| | Current Input | - | ±20 mA | ±20 mA, 4 ~ 20mA | 0 ~ 20 mA, 4 ~ 20 mA | ±20 mA |
| | Direct Sensor Input | Pt or Ni RTD | - | - | - | J, K, T, E, R, S, B |
| Isolation | | 3,000 V _{DC} | 3,000 V _{DC} | 3,000 V _{DC} | 3,000 V _{DC} | 3,000 V _{DC} |

*Sampling rate value depends on used channel number.

Example: Using 5 channels on ADAM-5017, sampling rate for each used channel will be $10/5 = 2$ samples/second.

**The sampling rate varies with the controller.



| Module | | ADAM-5018P | ADAM-5024 | ADAM-5050 | ADAM-5051/ ADAM-5051D/ ADAM-5051S | ADAM-5052 | ADAM-5053S |
|----------------------------------|-------------------------|--|------------------------|----------------------------------|--|------------------------|-----------------------|
| Analog Input | Resolution | 16 bit | - | - | - | - | - |
| | Input Channel | 7 | - | - | - | - | - |
| | Sampling Rate | 10 (total*) | - | - | - | - | - |
| | Voltage Input | ±15 mV, ±50 mV ±100 mV, ±500 mV ±1 V, ±2.5 V | - | - | - | - | - |
| | Current Input | 4 ~ 20 mA | - | - | - | - | - |
| | Direct Sensor Input | J, K, T, E, R, S, B | - | - | - | - | - |
| Analog Output | Output Channels | - | 4 | - | - | - | - |
| | Resolution | - | 12 bit | - | - | - | - |
| | Voltage Output | - | 0 ~ 10 V | - | - | - | - |
| | Current Output | - | 0 ~ 20 mA 4 ~ 20 mA | - | - | - | - |
| Digital Input and Digital Output | Digital Input Channels | - | - | 16 DI/O (bit-wise selectable) | 16 (ADAM-5051) 16w/LED (5051D/5051S) | 8 | 32 |
| | Digital Output Channels | - | - | - | - | - | - |
| Isolation | | 3,000 V _{DC} | 3,000 V _{DC} | - | 2,500 V _{DC} (5051S) | 5,000 V _{RMS} | 2,500 V _{DC} |

*Sampling rate value depends on used channel number.

Example: Using 6 channels on ADAM-5017, sampling rate for each used channel will be $12/6 = 2$ samples/second.

1

Software and Industry
Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and
Monitors

5

Automation Computers
and Controllers

6

Industrial
Communication

7

Remote I/O Modules

8

Industrial I/O and
Video Solutions

ADAM-5000 I/O Module Selection Guide

Digital Input/Output Modules



| Module | | ADAM-5055S | ADAM-5056/ ADAM-5056D | ADAM-5056S/ ADAM-5056SO | ADAM-5057S | ADAM-5060 |
|--|----------------------------|-----------------------|--|----------------------------|-----------------------|--------------------------------|
| Digital Input and Digital Output | Digital Input Channels | 8 w/LED | - | - | - | - |
| | Digital Output Channels | 8 w/LED | 16 (ADAM-5056) 16 w/LED (ADAM-5056D) | 16 w/LED | 32 | 6 relay (2 form A/4 form C) |
| Isolation | | 2,500 V _{DC} | - | 2,500 V _{DC} | 2,500 V _{DC} | - |



| Module | | ADAM-5069 | ADAM-5080 | ADAM-5081 | ADAM-5090/ ADAM-5091 | ADAM-5191 | ADAM-5192 |
|--|----------------------------|---------------------------|---|--|-------------------------|-----------------------|-------------------------|
| Digital Input and Digital Output | Digital Input Channels | - | - | - | - | - | - |
| | Digital Output Channels | 8 power relay (form A) | - | - | - | - | - |
| Counter (32-bit) | Channels | - | 4 | 4/8 | - | - | - |
| | Input Frequency | - | 0.3 ~ 1000 Hz max. (frequency mode) 5000 Hz max. (counter mode) | 5 Hz ~ 1 MHz max. (frequency mode) 1 MHz max. (counter mode) | - | - | - |
| | Mode | - | Frequency, Up/ Down Counter, Bi-direction Counter | Frequency, Counter (Up/Down, Bi-direction, Up, A/B Phase) | - | - | - |
| Communication | Channels | - | - | - | 4 (ADAM-5630 only) | 4 (ADAM-5630 only) | 2 |
| | Type | - | - | - | RS-232/422/485 | RS-232/422/485 | LAN (ADAM-5630 only) |
| Isolation | | - | 1,000 V _{RMS} | 2,500 V _{DC} | - | 1,000 V _{DC} | - |

ADAM-5000 Controller Support Table

| Type | | PAC | | | PC-based Controller | | |
|------------------------|-------------|------------------------------------|--|---|---|--|--|
| System | | ADAM-5560KW | ADAM-5510KW ADAM-5510EKW | ADAM-5510KW/TCP ADAM-5510EKW/TP | ADAM-5560CE | ADAM-5510/TCP ADAM-5510E/TCP | ADAM-5510M ADAM-5510E |
| Function | I/O Module | 7-slot Micro PAC with Atom™ CPU | 4/8-slot Softlogic Controller w/ RS-485 | 4/8-slot Softlogic Controller w/ Ethernet | 7-slot PC-based Controller with Atom™ CPU | 4/8-slot PC-based Controller with Ethernet | 4/8-slot PC-based Controller with RS-485 |
| Analog Input (AI) | ADAM-5013 | • | • | • | • | • | • |
| | ADAM-5017 | • | • | • | • | • | • |
| | ADAM-5017P | • | - | - | • | • | • |
| | ADAM-5017H | - | • | • | - | • | • |
| | ADAM-5017UH | • | - | - | • | • | • |
| | ADAM-5018 | • | • | • | • | • | • |
| | ADAM-5018P | • | - | - | • | • | • |
| Analog Output (AO) | ADAM-5024 | • | • | • | • | • | • |
| Digital Input (DI) | ADAM-5051 | • | • | • | • | • | • |
| | ADAM-5051D | • | • | • | • | • | • |
| | ADAM-5051S | • | • | • | • | • | • |
| | ADAM-5052 | • | • | • | • | • | • |
| | ADAM-5053S | • | - | - | • | - | - |
| Digital Output (DO) | ADAM-5056 | • | • | • | • | • | • |
| | ADAM-5056D | • | • | • | • | • | • |
| | ADAM-5056S | • | • | • | • | • | • |
| | ADAM-5056SO | • | • | • | • | • | • |
| | ADAM-5057S | • | - | - | • | - | - |
| Digital I/O | ADAM-5050 | • | • | • | • | • | • |
| | ADAM-5055S | • | • | • | • | • | • |
| Relay Output | ADAM-5060 | • | • | • | • | • | • |
| | ADAM-5069 | • | • | • | • | • | • |
| Counter/ Frequency | ADAM-5080 | - | • | • | - | • | • |
| | ADAM-5081 | • | - | - | • | • | • |
| Comm. | ADAM-5090 | - | • | • | - | • | • |

1

Software and Industry
Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and
Monitors

5

Automation Computers
and Controllers

6

Industrial
Communication

7


Remote I/O Modules

8

Industrial I/O and
Video Solutions

ADAM-6700 Series


Edge Data Acquisition and Analytics Gateway

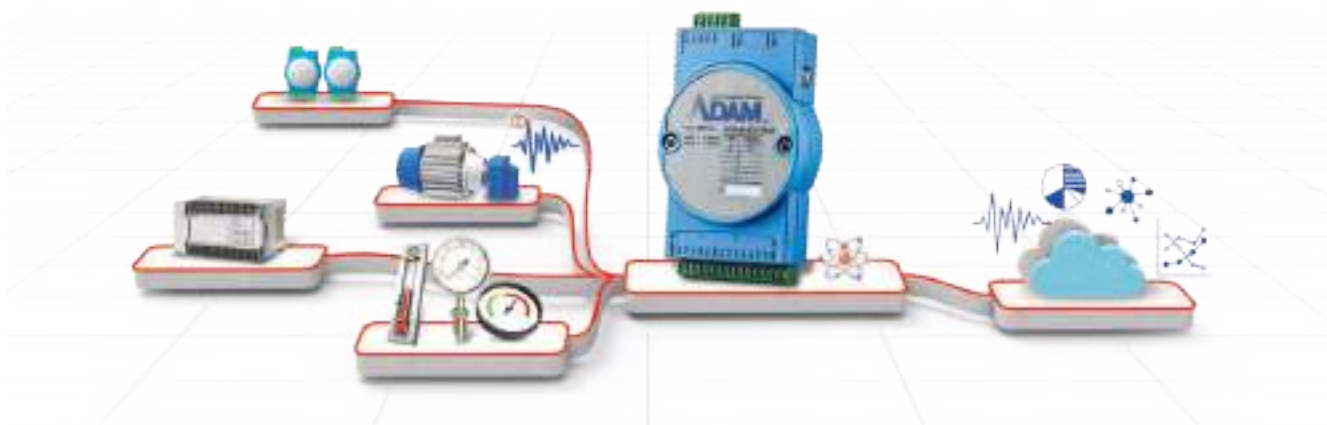

Introduction

ADAM-6700 is aiming at the edge applications. Compact size with I/O and powerful CPU allow it to possess the strength of data acquisition and analytics. Leveraging the Node-red ADAM-6700 series provides flexibility in different applications.

Edge Gateway with DAQ and Intelligence

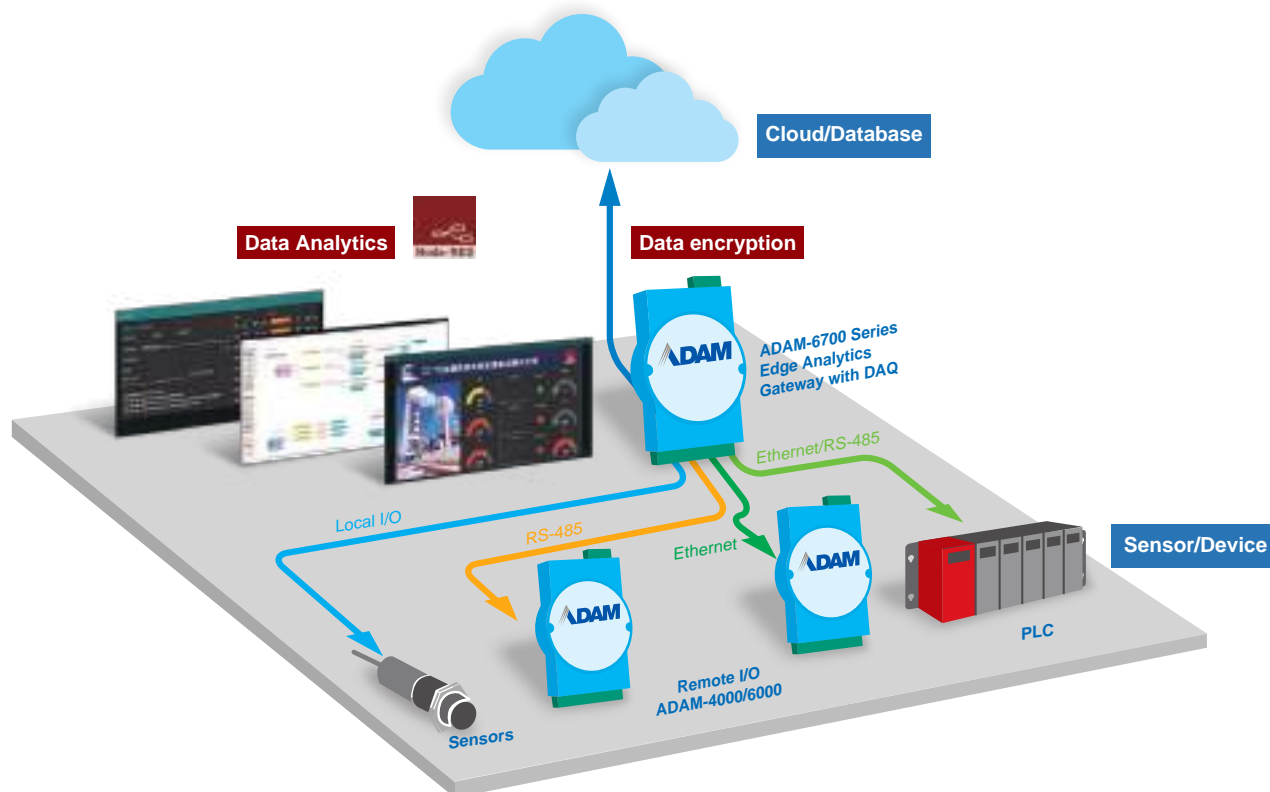

Features

Edge Data Analytics

The cloud connectivity cost is related to the data size updated to the cloud, instead of updating all raw data to the cloud, ADAM-6700 processed the raw data and turn them into significant information such as average ,Max ,min of a period , the RMS,FFT value for predictive maintenance. The data size is reduced by sending the processed data.

Acquire data and take action locally

ADMA-6700 series equips the I/O that can acquire data from digital or analog sensors, and with the A8 MCU, large amount of data can be analyzed, and take the action locally, which reduce the latency or lose of sending command from cloud. For instance, if the temperature and vibration value is out of the specification, ADAM-6700 will directly trigger the alarm locally, meanwhile, sending the mail to management center.

Built in Node-Red

Node-red is a graphic programming tool developed by IBM. User can establish the project by simply dragging and dropping the nodes. No complicated programming process is need. Furthermore all the nodes information are open to public, variety of nodes can be found at <https://flows.nodered.org/>, Besides, the nodes are programmed based on JavaScript, for advanced users, JavaScript code for nodes can be modified according to the project

Cloud access with data encryption

Every cloud service has their own connection mechanism. So user will face the difficulty handling the protocol, encryption and data format. ADAM-6700 series is capable of dealing with data to the cloud service by different nodes. For the legacy machines that are incapable of sending data to the cloud, ADAM-6700 series transforms those legacy machines to the IoT world

Starting-up with Node-RED

ADAM-6700 series is built in the Node-RED environment. Various nodes enable users to establish the project in a short time without much effort . Below lists some examples about what users can leverage by the Node-red nodes. More nodes information can be found at <https://flows.nodered.org/>,

Communication

Users can use the node to deal with communication such as MQTT,Modbus,Restful. Furthermore the nodes also handle the process to update data to database or cloud

Data Visualization

Users can use the dashboard to visualize the data. The data trend can be monitored easily

Data process

the raw data can be calculated with the calculation nodes. Processed Data such as the average ,max,min ,scaling, RMS, FFT and many calculation results can be obtained with the nodes

Set logic rules

with the logic nodes, user can set the logic rule by using the "If", "then", "else", "and", "or" nodes according to their project. After setting, the ADAM-6700 will take action locally according to the rules



ADAM-6700 Series Selection Guide



| | | ADAM-6750 | ADAM-6717UH | ADAM-6771 |
|------------------|---------------|---|------------------------|-----------|
| CPU | | ARM Cortex-A8 32-Bit 1GHz | | |
| Memory | | NAND flash 512MB | | |
| RAM | | DDR3L 512MB | | |
| External storage | | 1GB microSD (Optional) | | |
| OS | | Real-time Linux V3.12 | | |
| Programming | | Node-Red(Graphic programming environment based on javascript),Linux C | | |
| Interface | RS-485 | 1 | | 2 |
| | RS-485/232 | | | 2 |
| | LAN | 2 | 2 | 2 |
| | USB 2.0 | | | 1 |
| Digital input | Channel | 8 | | |
| | Type | Dry contact: logic 0 close to ground logic 1 Open Wet contact: logic 0: 0 ~ 5 V _{DC} logic 1: 10 ~ 50 V _{DC} | | |
| | Counter input | 3kHz | | |
| Digital Output | Channel | 4 | 1 | |
| | Voltage | 0 ~ 50 V _{DC} | 0 ~ 50 V _{DC} | |
| | Type | Sink | Sink | |
| Analog input | channel | | 8 | |
| | Sampling rate | 100kHz (total) | | |
| Dimension | | 70W x 122L x 27H mm | | |

6

Industrial Communication

6-2 Industrial Ethernet Solutions

6-16 Industrial Wireless and Protocol Gateway Solutions



Industrial Communication in the IoT Era

Connecting legacy devices to IoT

Most legacy devices are isolated and unconnected, but the use of legacy network technologies still prevails in industrial automation and new solutions that connect legacy devices to modern networking systems are needed in order to extend the useful life of existing machinery as to avoid an expensive machine purchase or major upgrade.

Moving from Closed to Open, IP-based Networks

The adoption of an open, IP-based network has gained in popularity for their ability to connect every machine, device, and equipment together on the same network either by wired or wireless technologies in order to maximize the true benefits of IoT.

Empowered Edge Computing


Bringing intelligence to where the action takes place — edge computing processes data locally, at the edge of the network, near the source of the data, then passes data from the local area network to the cloud. It is an attractive technology which not only provides a faster response, but also helps relieve the workload of the cloud, making the cost of building your IoT Infrastructure much lower. Advantech's industrial communication solutions offer various wired and wireless communication technologies, ensuring a secure and seamless connection of every layer in the industrial communication network.



Our Technologies

Interconnected Solutions for an Intelligent Planet

In the IoT era, equipment and machines are able to connect and communicate with each other to increase productivity, efficiency, and scalability. The core mission of Advantech's iConnectivity Group is to offer best-in-class industrial communication solutions including both wired and wireless technologies that can truly help integrators leverage the full potential of IoT in the most effective and productive way.



WebAccess/NMS

Advantech's WebAccess/NMS provides centralized remote network management for industrial vertical applications.

- Auto networking topology
- Configuration backup and restore
- Network monitoring and reporting
- Dynamic connectivity indication



Network Edge

Advantech's cellular routing solutions open up endless possibilities for IoT. Advantech's cellular routers support direct communication between MQTT-enabled devices and the cloud and their built-in Node-RED technology enables smart data processing and monitoring using Advantech's WISE/PaaS management software.


- Support for operation with global 3G/LTE coverage
- Cyber security protection via firewall, NAT, and VPN
- Intelligent gateways support LoRa, and Mesh networks



Wired & Wireless Network Infrastructure

Advantech provides a comprehensive product portfolio to help users build a robust, secure and scalable wired or wireless networking infrastructure.

- Supports various industrial Ethernet protocols, such as TCP/IP, Ethernet/IP, PROFINET, CC-link, and ODVA
- Compliant with C1D2, ATEX, IECEx certifications for hazardous environments
- Cyber security protection within the network
- Layer 3 routing protocols: RIP, OSPF, and VRRP
- Advantech's patented IXM technology for rapid deployment, saving up to 90% of engineering time and resources



Protocol & Interface Conversion Solutions

Advantech offers numerous wired and wireless products to convert different legacy protocols and interfaces to modern networking systems to avoid a complete overhaul of existing equipment and devices, saving cost and avoiding software programming errors.

- Supports various industrial Ethernet protocols including TCP/IP, Ethernet/IP, and PROFINET
- Surge protection and field isolation
- Connects to edge sensors via LoRa and MESH technologies
- Serial-to-Ethernet and USB-to-Serial conversion

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O Modules

8

Industrial I/O and Video Solutions

Industrial Ethernet Solutions

EN50155 Ethernet Switches



| Model Name | | EKI-9512E-4EETB | EKI-9528E-4GMP EKI-9528G-4GMP | EKI-9520E-4GMP EKI-9520G-4GMP | EKI-9510G-2GMPL EKI-9510G-2GMPL | EKI-9510E-2GMPL EKI-9510E-2GMPL | EKI-9508G-MPL EKI-9508G-MPL |
|-----------------------|------------------------------|---|---|---|---|---|---|
| Description | | EN 50155 12-port Ethernet Train Backbone Router | EN 50155 28-port Managed Ethernet Switch/With PoE | EN 50155 20-port Managed Ethernet Switch/With PoE | EN 50155 10-port Full Gigabit Managed Ethernet Switch/With PoE | EN 50155 10-port Managed Ethernet Switch/With PoE | EN 50155 8-port Full Gigabit Managed Ethernet Switch/With PoE |
| Interface | Ports Number | 12 | 28 | 20 | 10 | 10 | 8 |
| | 10/100Base-T (X) | 12 | - | - | - | - | - |
| | 100BaseFX | - | - | - | - | - | - |
| | 10/100/1000Base-T (X) | - | 12 | 4 | 2 | 2 | - |
| | 1000Base-SX/LX/LHX/XD/ZX/EZX | - | - | - | - | - | - |
| | PoE (10/100 Mbps) | - | 16 (EKI-9528E-4GMP) | 16 (EKI-9520E-4GMP) | - | 8 | - |
| | PoE (10/100/1000 Mbps) | - | 16 (EKI-9528G-4GMP) | 16 (EKI-9520G-4GMP) | 8 | - | 8 |
| | DI/DO | - | - | - | - | - | - |
| Network Management | Console | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Redundancy | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Diagnostics | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | VLAN | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Configuration | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | SNMP | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Security | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Power | Traffic Control | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | 12 ~ 48 V DC | - | - | - | - | - | - |
| | 24 ~ 110 V DC | ✓ | ✓ | ✓ | EKI-9510G-2GMPL: 24~48V DC EKI-9510G-2GMPL: 72~110V DC | EKI-9510E-2GMPL: 24~48V DC EKI-9510E-2GMPL: 72~110V DC | EKI-9508G-MPL: 24~48V DC EKI-9508G-MPL: 72~110V DC |
| | 100 ~ 240 V AC | - | - | - | - | - | - |
| | Relay Output | ✓ | ✓ | ✓ | - | - | - |
| Mechanism | DIN-rail Mount | - | - | - | - | - | - |
| | Wall Mount | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Rack Mount | - | - | - | - | - | - |
| | IP Level | IP67 | IP67 | IP67 | IP40 | IP40 | IP40 |
| Protection | ESD (Ethernet) | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Surge (EFT for power) | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Power Reverse | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Operating Temperature | -10 ~ 60°C (14 ~ 140°F) | - | - | - | - | - | - |
| | -40 ~ 75°C (-40 ~ 167°F) | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | -40 ~ 85°C (-40 ~ 185°F) | - | - | - | - | - | - |
| Certifications | CE | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | FCC | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | UL/cUL 60950-1 | - | - | - | - | - | - |
| | Class 1, Division 2 | - | - | - | - | - | - |
| | UL 508 | - | - | - | - | - | - |
| Others | | EN50155 | EN50155 | EN50155 | EN50155 | EN50155 | EN50155 |

✓ : supported, - : not supported, △ : optional

EN50155 Ethernet Switches



| Model Name | | EKI-9508E-MPH EKI-9508E-MPL | EKI-9512 EKI-9512P | EKI-9512D EKI-9512DP | EKI-9516 EKI-9516P | EKI-9516D EKI-9516DP |
|-----------------------|----------------------------------|---|---|--|---|---|
| Description | | EN 50155 8-port Managed Ethernet Switch/With PoE | EN 50155 12-port Full Gigabit Managed Ethernet Switch/With PoE + PoE+ | EN 50155 12-port Managed Ethernet Switch /With PoE/PoE+ | EN 50155 16-port Full Gigabit Managed Ethernet Switch/With PoE/PoE+ | EN 50155 16-port Managed Ethernet Switch/With PoE/PoE+ |
| Interface | Ports Number | 8 | 12 | 12 | 16 | 16 |
| | 10/100Base-T (X) | - | - | 12(EKI-9512D) 4(EKI-9512DP) | - | 16(EKI-9516D) 4(EKI-9516DP) |
| | 100BaseFX | - | - | - | - | - |
| | 10/100/1000Base-T (X) | - | 12(EKI-9512) 4(EKI-9512P) | - | 16(EKI-9516) 4(EKI-9516P) | - |
| | 1000Base-SX/LX/LHX/ XD/ZX/EZX | - | - | - | - | - |
| | PoE (10/100 Mbps) | 8 | - | 8(EKI-9512DP) | - | 12(EKI-9516DP) |
| | PoE (10/100/1000 Mbps) | - | 8(EKI-9512P) | - | 12(EKI-9516P) | - |
| | DI/DO | - | - | - | - | - |
| Network Management | Console | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Redundancy | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Diagnostics | ✓ | ✓ | ✓ | ✓ | ✓ |
| | VLAN | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Configuration | ✓ | ✓ | ✓ | ✓ | ✓ |
| | SNMP | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Security | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Traffic Control | ✓ | ✓ | ✓ | ✓ | ✓ |
| Power | 12 ~ 48 V DC | - | - | - | - | - |
| | 24 ~ 110 V DC | EKI-9508E-MPL: 24~48V DC EKI-9508G-MPH: 72~110V DC | EKI-9512P-LV: 24~48V DC EKI-9512P-HV: 72~110V DC EKI-9512-WV: 24~110V DC | EKI-9512DP-LV: 24~48V DC EKI-9512DP-HV: 72~110V DC EKI-9512D-WV: 24~110V DC | EKI-9516P-LV: 24~48V DC EKI-9516P-HV: 72~110V DC EKI-9516-WV: 24~110V DC | EKI-9516DP-LV: 24~48V DC EKI-9516DP-HV: 72~110V DC EKI-9516-WV: 24~110V DC |
| | 100 ~ 240 V AC | - | - | - | - | - |
| | Relay Output | - | ✓ | ✓ | ✓ | ✓ |
| Mechanism | DIN-rail Mount | - | - | - | - | - |
| | Wall Mount | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Rack Mount | - | - | - | - | - |
| | IP Level | IP40 | IP67 | IP67 | IP67 | IP67 |
| Protection | ESD (Ethernet) | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Surge (EFT for power) | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Power Reverse | ✓ | ✓ | ✓ | ✓ | ✓ |
| Operating Temperature | -10 ~ 60°C (14 ~ 140°F) | - | - | - | - | - |
| | -40 ~ 75°C (-40 ~ 167°F) | ✓ | ✓ | ✓ | ✓ | ✓ |
| | -40 ~ 85°C (-40 ~ 185°F) | - | - | - | - | - |
| Certifications | CE | ✓ | ✓ | ✓ | ✓ | ✓ |
| | FCC | ✓ | ✓ | ✓ | ✓ | ✓ |
| | UL/cUL 60950-1 | - | - | - | - | - |
| | Class 1, Division 2 | - | - | - | - | - |
| | UL 508 | - | - | - | - | - |
| | Others | EN50155 | EN50155 | EN50155 | EN50155 | EN50155 |

✓ : supported, - : not supported, △ : optional

1

Software and Industry
Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and
Monitors

5

Automation Computers
and Controllers

6

Industrial
Communication

7

Remote I/O Modules

8

Industrial I/O and
Video Solutions

Industrial Ethernet Solutions

L3 Managed Switches



| Model Name | | EKI-9728G-4X8CI | EKI-9628G-4CI | EKI-9612G-4FI |
|-----------------------|------------------------------|--|---------------------------|---------------------------|
| Description | | L3 28-port Managed Switch w/ 4 x 10GbE ports | L3 28-port Managed Switch | L3 12-port Managed Switch |
| Interface | Ports Number | 28 | 28 | 12 |
| | 10/100Base-T (X) | - | - | - |
| | 100BaseFX | - | - | - |
| | 10/100/1000Base-T (X) | 16+8 (combo) | 24+4 (combo) | 8 |
| | 1000Base-SX/LX/LHX/XD/ZX/EZX | 8 (combo) | 4 (combo) | 4 x SFP |
| | PoE (10/100 Mbps) | - | - | - |
| | PoE (10/100/1000 Mbps) | - | - | - |
| | HSR/PRP | 4 | - | - |
| | Console | ✓ | ✓ | ✓ |
| Network Management | Redundancy | ✓ | ✓ | ✓ |
| | Diagnostics | ✓ | ✓ | ✓ |
| | VLAN | ✓ | ✓ | ✓ |
| | Configuration | ✓ | ✓ | ✓ |
| | SNMP | ✓ | ✓ | ✓ |
| | Security | ✓ | ✓ | ✓ |
| | Traffic Control | ✓ | ✓ | ✓ |
| Power | 12 ~ 48 V DC | - | ✓ | ✓ |
| | 24 ~ 110 V DC | - | - | - |
| | 100 ~ 240 V AC | 90~264 V _{AC} | - | - |
| | Relay Output | - | - | - |
| Mechanism | DIN-rail Mount | - | - | ✓ |
| | Wall Mount | - | - | - |
| | Rack Mount | ✓ | ✓ | - |
| | IP Level | IP30 | IP30 | IP30 |
| Protection | ESD (Ethernet) | ✓ | ✓ | ✓ |
| | Surge (EFT for power) | ✓ | ✓ | ✓ |
| | Power Reverse | ✓ | ✓ | ✓ |
| Operating Temperature | -10 ~ 60°C (14 ~ 140°F) | - | - | - |
| | -40 ~ 75°C (-40 ~ 167°F) | ✓ | ✓ | ✓ |
| | -40 ~ 85°C (-40 ~ 185°F) | - | - | - |
| | -40 ~ 85°C (-40 ~ 185°F) | - | - | - |
| Certifications | CE | ✓ | ✓ | ✓ |
| | FCC | ✓ | ✓ | ✓ |
| | UL/cUL 60950-1 | - | - | - |
| | Class 1, Division 2 | - | - | - |
| | UL 508 | - | ✓ | ✓ |
| Others | | - | - | - |

IEC 61850-3 Managed Industrial Ethernet Switches



| Model Name | | EKI-9228G-20FOI EKI-9228G-20FMI | EKI-9226G-20FOI EKI-9226G-20FMI | EKI-9213E-2CPHR |
|-----------------------|------------------------------|---|---|--|
| Description | | 28-port Full Giga Managed Switch | 26-port Full Giga Managed Switch | 13-port Managed Switch support HSR/PRP |
| Interface | Ports Number | 28 | 26 | 13 |
| | 10/100Base-T (X) | - | - | 8 |
| | 100BaseFX | - | - | - |
| | 10/100/1000Base-T (X) | 24+4 (Combo) | 20 | - |
| | 1000Base-SX/LX/LHX/XD/ZX/EZX | 4 x SFP(Combo) | 6 x SFP | 3 x SFP |
| | PoE (10/100 Mbps) | - | - | - |
| | PoE (10/100/1000 Mbps) | - | - | - |
| | HSR/PRP | - | - | 2 x RJ-45/SFP combo |
| | Console | ✓ | ✓ | ✓ |
| Network Management | Redundancy | ✓ | ✓ | ✓ |
| | Diagnostics | ✓ | ✓ | ✓ |
| | VLAN | ✓ | ✓ | ✓ |
| | Configuration | ✓ | ✓ | ✓ |
| | SNMP | ✓ | ✓ | ✓ |
| | Security | ✓ | ✓ | ✓ |
| | Traffic Control | ✓ | ✓ | ✓ |
| Power | 12 ~ 48 V DC | EKI-9228G-20FMI (48 V _{DC}) | EKI-9226G-20FMI (48 V _{DC}) | ✓ |
| | 24 ~ 110 V DC | - | - | - |
| | 100 ~ 240 V AC | EKI-9228G-20FMI (90 ~ 264 V _{AC}) | EKI-9226G-20FOI (90 ~ 264 V _{AC}) | ✓ |
| | Relay Output | ✓ | ✓ | ✓ |
| Mechanism | DIN-rail Mount | - | - | ✓ |
| | Wall Mount | - | - | ✓ |
| | Rack Mount | ✓ | ✓ | ✓ |
| | IP Level | IP30 | IP30 | IP30 |
| Protection | ESD (Ethernet) | ✓ | ✓ | ✓ |
| | Surge (EFT for power) | ✓ | ✓ | ✓ |
| | Power Reverse | ✓ | ✓ | ✓ |
| Operating Temperature | -10 ~ 60°C (14 ~ 140°F) | - | - | - |
| | -40 ~ 75°C (-40 ~ 167°F) | - | - | - |
| | -40 ~ 85°C (-40 ~ 185°F) | ✓ | ✓ | ✓ |
| | -40 ~ 85°C (-40 ~ 185°F) | - | - | - |
| Certifications | CE | ✓ | ✓ | ✓ |
| | FCC | ✓ | ✓ | ✓ |
| | UL/cUL 60950-1 | - | ✓ | ✓ |
| | Class 1, Division 2 | - | - | - |
| | UL 508 | ✓ | - | - |
| Others | | IEC 618500-3 | IEC 618500-3 | IEC 618500-3 |

✓ : supported, - : not supported, △ : optional

Managed Ethernet Switches



| Model Name | | EKI-7428G-4FA | EKI-7428G-20FA | EKI-7708G-2FVI | EKI-7710E-2C EKI-7710E-2CI | EKI-7710G-2C EKI-7710G-2CI | EKI-7712E-4F EKI-7712E-4FI | EKI-7712G-2FVI | EKI-7712G-4F EKI-7712G-4FI |
|-----------------------|----------------------------------|--|--|---|--|--|---|---|--|
| Description | | 24Giga+4SFP Giga ports Managed Redundant Switch w/ AC Input | 8Giga+20SFP Giga ports Managed Redundant Switch w/ AC Input | 4Giga + 2VDSL+2SFP Giga ports Managed Redundant Industrial Switch | 8FE+2G Port Gigabit Managed Redundant Industrial Switch | 8G+2G Port Gigabit Managed Redundant Industrial Switch/ with Wide Temperature | 8FE+4G SFP Port Gigabit Managed Redundant Industrial Switch/ with Wide Temperature | 8Giga + 2VDSL+2SFP Giga ports Managed Redundant Industrial Switch | 8G+4G SFP Port Gigabit Managed Redundant Industrial Switch/ with Wide Temperature |
| Interface | Ports Number | 28 | 28 | 8 | 10 | 10 | 12 | 12 | 12 |
| | 10/100Base-T (X) | - | - | 4 | 8 | - | - | - | - |
| | 100BaseFX | - | - | - | - | - | - | - | - |
| | 10/100/1000Base-T (X) | 24 | 8 | - | 2 | 8 | 8 | 8 | 8 |
| | 1000Base-SX/LX/ LHX/XD/ZX/EZX | 4 | 20 | 4 (2SFP+2VDSL) | 2 | 2 | 4 | 4 (2SFP+2VDSL) | 4 |
| | PoE (10/100 Mbps) | - | - | - | - | - | - | - | - |
| | PoE (10/100/1000 Mbps) | - | - | - | - | - | - | - | - |
| | HSR/PRP | - | - | - | - | - | - | - | - |
| Network Management | Console | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Redundancy | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Diagnostics | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | VLAN | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Configuration | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | SNMP | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Security | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Traffic Control | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Power | 12 ~ 48 V DC | - | - | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | 24 ~ 110 V DC | - | - | - | - | - | - | - | - |
| | 100 ~ 240 V AC | ✓ | ✓ | - | - | - | - | - | - |
| | Relay Output | - | - | ✓ | - | - | - | ✓ | - |
| Mechanism | DIN-rail Mount | - | - | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Wall Mount | - | - | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Rack Mount | ✓ | ✓ | - | - | - | - | - | - |
| | IP Level | - | - | 30 | IP30 | IP30 | IP30 | 30 | IP30 |
| Protection | ESD (Ethernet) | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Surge (EFT for power) | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Power Reverse | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Operating Temperature | -10 ~ 60°C (14 ~ 140°F) | -10 ~ 55°C (14 ~ 131°F) | -10 ~ 55°C (14 ~ 131°F) | - | ✓ | ✓ | ✓ | - | ✓ |
| | -40 ~ 75°C (-40 ~ 167°F) | - | - | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | -40 ~ 85°C (-40 ~ 185°F) | - | ✓ | - | - | - | - | - | - |
| Certifications | CE | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | FCC | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | UL/cUL 60950-1 | ✓ | ✓ | - | - | - | - | - | - |
| | Class 1, Division 2 | - | - | - | - | - | - | - | - |
| | UL 508 | - | - | - | ✓ | ✓ | ✓ | - | ✓ |
| Others | | - | - | UL 61010 | NEMA TS2 EN50121-4 | NEMA TS2 EN50121-4 | NEMA TS2 EN50121-4 | UL 61010 | NEMA TS2 EN50121-4 |

✓ : supported, - : not supported, △ : optional

1

Software and Industry
Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and
Monitors

5

Automation Computers
and Controllers

6

Industrial
Communication

7

Remote I/O Modules

8

Industrial I/O and
Video Solutions

Industrial Ethernet Solutions

Managed Ethernet Switches



| Model Name | | EKI-7720E-4F EKI-7720E-4FI | EKI-7720G-4F EKI-7720G-4FI | EKI-7706E-2F/I | EKI-7706G-2F/I | EKI-7708E-4F/I | EKI-7708G-4F/I | EKI-7716E-4F/I | EKI-7716G-4F/I |
|-----------------------|------------------------------|--|---|---|---|---|---|--|--|
| Description | | 16FE+4G SFP Port Gigabit Managed Redundant Industrial Switch with Wide Temperature | 16G+4G SFP Port Gigabit Managed Redundant Industrial Switch with Wide Temperature | 4FE+2SFP Giga ports Managed Redundant Industrial Switch | 4Giga+2SFP Giga ports Managed Redundant Industrial Switch | 4FE+4SFP Giga ports Managed Redundant Industrial Switch | 4Giga+4SFP Giga ports Managed Redundant Industrial Switch | 8FE+4SFP+4G Combo port Managed Redundant Industrial Switch | 8GE+4SFP+4G Combo port Managed Redundant Industrial Switch |
| Interface | Ports Number | 20 | 20 | 6 | 6 | 8 | 8 | 16 | 16 |
| | 10/100Base-T (X) | - | - | 4 | - | 4 | - | 8 + 4 (Combo) | - |
| | 100BaseFX | - | - | - | - | - | - | - | - |
| | 10/100/1000Base-T (X) | 16 | 16 | - | 4 | - | 4 | - | 8 + 4 (Combo) |
| | 1000Base-SX/LX/LHX/XD/ZX/EZX | 4 | 4 | 2 | 2 | 4 | 4 | 4 + 4 (Combo) | 4 + 4 (Combo) |
| | PoE (10/100 Mbps) | - | - | - | - | - | - | - | - |
| | PoE (10/100/1000 Mbps) | - | - | - | - | - | - | - | - |
| | DI/DO | - | - | - | - | - | - | - | - |
| | Console | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Network Management | Redundancy | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Diagnostics | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | VLAN | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Configuration | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | SNMP | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Security | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Traffic Control | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Power | 12 ~ 48 V DC | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | 24 ~ 110 V DC | - | - | - | - | - | - | - | - |
| | 100 ~ 240 V AC | - | - | - | - | - | - | - | - |
| | Relay Output | - | - | - | - | - | - | - | - |
| Mechanism | DIN-rail Mount | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Wall Mount | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Rack Mount | - | - | - | - | - | - | - | - |
| | IP Level | IP30 | IP30 | - | - | - | - | - | - |
| Protection | ESD (Ethernet) | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Surge (EFT for power) | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Power Reverse | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Operating Temperature | -10 ~ 60°C (14 ~ 140°F) | ✓ | ✓ | EKI-7706E-2F | EKI-7706G-2F | EKI-7708E-4F | EKI-7708G-4F | EKI-7716E-4F | EKI-7716G-4F |
| | -40 ~ 75°C (-40 ~ 167°F) | ✓ | ✓ | EKI-7706E-2FI | EKI-7706G-2FI | EKI-7708E-4FI | EKI-7708G-4FI | EKI-7716E-4FI | EKI-7716G-4FI |
| | -40 ~ 85°C (-40 ~ 185°F) | - | - | - | - | - | - | - | - |
| Certifications | CE | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | FCC | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | UL/cUL 60950-1 | - | - | - | - | - | - | - | - |
| | Class 1, Division 2 | - | - | - | - | - | - | - | - |
| | UL 508 | ✓ | ✓ | - | - | - | - | - | - |
| Others | | NEMA TS2 EN50121-4 | NEMA TS2 EN50121-4 | UL 61010 | UL 61010 | UL 61010 | UL 61010 | UL 61010 | UL 61010 |

✓ : supported, - : not supported, △ : optional

Managed Protocol Switches



| Model Name | | EKI-5526/I-EI EKI-5528/I-EI | EKI-5526/I-PN EKI-5528/I-PN | EKI-5526/I-MB EKI-5528/I-MB | EKI-5626C/I-EI EKI-5629C/I-EI | EKI-5626C/I-PN EKI-5629C/I-PN | EKI-5626C/I-MB EKI-5629C/I-MB |
|-----------------------|----------------------------------|---|--|--|--|---|---|
| Description | | 16/8 port Entry-Level Managed Switch Supporting EtherNet/IP | 16/8 port Entry-Level Managed Switch Supporting PROFINET | 16/8 port Entry-Level Managed Switch Supporting Modbus | 18/10 port Entry-Level Managed Switch Supporting EtherNet/IP | 18/10 port Entry-Level Managed Switch Supporting PROFINET | 18/10 port Entry-Level Managed Switch Supporting Modbus |
| Interface | Ports Number | 16/8 | 16/8 | 16/8 | 16/8 | 16/8 | 16/8 |
| | 10/100Base-T (X) | 16/8 | 16/8 | 16/8 | 16/8 | 16/8 | 16/8 |
| | 100BaseFX | - | - | - | - | - | - |
| | 10/100/1000Base-T (X) | - | - | - | 2/2 | 2/2 | 2/2 |
| | 1000Base-SX/LX/ LHX/XD/ZX/EZX | - | - | - | 2/2 | 2/2 | 2/2 |
| | PoE (10/100 Mbps) | - | - | - | - | - | - |
| | PoE (10/100/1000 Mbps) | - | - | - | - | - | - |
| | DI/DO | - | - | - | - | - | - |
| | Console | - | - | - | - | - | - |
| Network Management | Redundancy | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Diagnostics | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | VLAN | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Configuration | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | SNMP | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Security | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Traffic Control | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Power | 12 ~ 48 V DC | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | 24 ~ 110 V DC | - | - | - | - | - | - |
| | 100 ~ 240 V AC | - | - | - | - | - | - |
| | Relay Output | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Mechanism | DIN-rail Mount | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Wall Mount | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Rack Mount | - | - | - | - | - | - |
| | IP Level | IP30 | IP30 | IP30 | IP30 | IP30 | IP30 |
| Protection | ESD (Ethernet) | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Surge (EFT for power) | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Power Reverse | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Operating Temperature | -10 ~ 60°C (14 ~ 140°F) | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | -40 ~ 75°C (-40 ~ 167°F) | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | -40 ~ 85°C (-40 ~ 185°F) | - | - | - | - | - | - |
| Certifications | CE | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | FCC | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | UL/cUL 60950-1 | - | - | - | - | - | - |
| | Class 1, Division 2 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | UL 508 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Others | - | - | - | - | - | - |

✓ : supported, - : not supported, △ : optional

1

Software and Industry
Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and
Monitors

5

Automation Computers
and Controllers

6

Industrial
Communication

7

Remote I/O Modules

8

Industrial I/O and
Video Solutions

Industrial Ethernet Solutions

Unmanaged Ethernet Switches



| Model Name | | EKI-5726FI | EKI-5729FI | EKI-5726I | EKI-5728/I | EKI-5626CI | EKI-5629CI | EKI-5528/I EKI-5525/I |
|-----------------------|------------------------------|---------------------------------------|--------------------------------------|---------------------------------|----------------------------------|----------------------------------|---------------------------------|-------------------------------|
| Description | | 16-port+2 SFP Gigabit Ethernet Switch | 8-Port+2 SFP Gigabit Ethernet Switch | 16-port Gigabit Ethernet Switch | 5/8-port Gigabit Ethernet Switch | 16FE + 2GE Combo Ethernet Switch | 8FE + 2GE Combo Ethernet Switch | 8/5-port Fast Ethernet Switch |
| Interface | Ports Number | 16 | 8 | 16 | 5/8 | 18 | 10 | 8/5 |
| | 10/100Base-T (X) | - | - | - | - | 16 | 8 | 8/5 |
| | 100BaseFX | ✓ | ✓ | - | - | - | - | - |
| | 10/100/1000Base-T (X) | 16 | 8 | 16 | 5/8 | - | - | - |
| | 1000Base-SX/LX/LHX/XD/ZX/EZX | ✓ | ✓ | - | - | 2 | 2 | - |
| | PoE (10/100 Mbps) | - | - | - | - | - | - | - |
| | PoE (10/100/1000 Mbps) | - | - | - | - | - | - | - |
| | DI/DO | - | - | - | - | - | - | - |
| | Console | ✓ | ✓ | - | - | - | - | - |
| Network Management | Redundancy | - | - | - | - | - | - | - |
| | Diagnostics | - | - | - | - | - | - | - |
| | VLAN | - | - | - | - | - | - | - |
| | Configuration | ✓ | ✓ | ✓ | - | - | - | - |
| | SNMP | ✓ | ✓ | ✓ | ✓ | - | - | - |
| | Security | - | - | - | - | - | - | - |
| Power | Traffic Control | - | - | - | - | - | - | - |
| | 12 ~ 48 V DC | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | 24 ~ 110 V DC | - | - | - | - | - | - | - |
| | 100 ~ 240 V AC | - | - | - | - | - | - | - |
| Mechanism | Relay Output | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | DIN-rail Mount | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Wall Mount | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Rack Mount | - | - | - | - | - | - | - |
| Protection | IP Level | IP30 | IP30 | IP30 | IP30 | IP30 | IP30 | IP30 |
| | ESD (Ethernet) | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Surge (EFT for power) | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Operating Temperature | Power Reverse | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | -10 ~ 60°C (14 ~ 140°F) | - | - | - | - | - | - | - |
| | -40 ~ 75°C (-40 ~ 167°F) | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | -40 ~ 85°C (-40 ~ 185°F) | - | - | - | - | - | - | - |
| Certifications | CE | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | FCC | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | UL/cUL 60950-1 | - | - | - | - | - | - | - |
| | Class 1, Division 2 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | UL 508 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Others | - | - | - | - | - | - | - |

✓ : supported, - : not supported, △ : optional

Unmanaged Ethernet Switches



| Model Name | | EKI-5525SI/MI Series | EKI-5524SSI/MMI Series | EKI-2728M/MI | EKI-2725/I | EKI-2728/I |
|-----------------------|------------------------------|---|--|--|---|---|
| Description | | 4-port + 1x100FX port (Single/Multi-mode, SC/ST type), Fast Ethernet Switch | 4-port + 2x100FX port (Single/Multimode, SC/ST type), Fast Ethernet Switch | 6G+2G Multi-Mode Unmanaged Ethernet Switch | 5-port Gigabit Unmanaged Industrial Ethernet Switch | 8-port Gigabit Unmanaged Industrial Ethernet Switch |
| Interface | Ports Number | 4 | 6 | 8 | 5 | 8 |
| | 10/100Base-T (X) | 4 | 4 | - | - | - |
| | 100BaseFX | 1 | 2 | - | - | - |
| | 10/100/1000Base-T (X) | - | - | 6 | 5 | 8 |
| | 1000Base-SX/LX/LHX/XD/ZX/EZX | - | - | 2 | - | - |
| | PoE (10/100 Mbps) | - | - | - | - | - |
| | PoE (10/100/1000 Mbps) | - | - | - | - | - |
| | DI/DO | - | - | - | - | - |
| | Console | - | - | - | - | - |
| Network Management | Redundancy | - | - | - | - | - |
| | Diagnostics | - | - | - | - | - |
| | VLAN | - | - | - | - | - |
| | Configuration | - | - | - | - | - |
| | SNMP | - | - | - | - | - |
| | Security | - | - | - | - | - |
| | Traffic Control | - | - | - | - | - |
| Power | 12 ~ 48 V DC | ✓ | ✓ | ✓ | ✓ | ✓ |
| | 24 ~ 110 V DC | - | - | - | - | - |
| | 100 ~ 240 V AC | - | - | - | - | - |
| | Relay Output | ✓ | ✓ | ✓ | ✓ | ✓ |
| Mechanism | DIN-rail Mount | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Wall Mount | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Rack Mount | - | - | - | - | - |
| | IP Level | IP30 | IP30 | IP30 | IP30 | IP30 |
| Protection | ESD (Ethernet) | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Surge (EFT for power) | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Power Reverse | ✓ | ✓ | ✓ | ✓ | ✓ |
| Operating Temperature | -10 ~ 60°C (14 ~ 140°F) | - | - | EKI-2728M | EKI-2725 | EKI-2728 |
| | -40 ~ 75°C (-40 ~ 167°F) | ✓ | ✓ | EKI-2728MI | EKI-2725I | EKI-2728I |
| | -40 ~ 85°C (-40 ~ 185°F) | - | - | - | - | - |
| | CE | ✓ | ✓ | ✓ | ✓ | ✓ |
| Certifications | FCC | ✓ | ✓ | ✓ | ✓ | ✓ |
| | UL/cUL 60950-1 | - | - | - | ✓ | ✓ |
| | Class 1, Division 2 | ✓ | ✓ | ✓ | - | - |
| | UL 508 | ✓ | ✓ | ✓ | - | - |
| | Others | - | - | - | - | - |

✓ : supported, - : not supported, △ : optional

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O Modules

8

Industrial I/O and Video Solutions

Industrial Ethernet Solutions

Unmanaged Ethernet Switches



| Model Name | | EKI-2428G-4FA | EKI-2728S/2728SI | EKI-2525M/S | EKI-2526M/S | EKI-2525LI-AE |
|-----------------------|------------------------------|---|---|--|--|---|
| Description | | 24Giga+4SFP Giga ports Unmanaged Switch w/ AC Input | 6GE+2G Single-Mode Fiber Port Unmanaged Ethernet Switch | 4+1 100FX Port Multi-mode/Single-mode Unmanaged Industrial Ethernet Switch | 4+2 100FX Port Multi-mode/Single-mode Industrial Ethernet Switch | 5Fast Ethernet ports Slim Type Unmanaged Switch |
| Interface | Ports Number | 28 | 8 | 5 | 6 | 5 |
| | 10/100Base-T (X) | - | - | 4 | 4 | 5 |
| | 100BaseFX | - | - | 1 | 2 | - |
| | 10/100/1000Base-T (X) | 24 | 6 | - | - | - |
| | 1000Base-SX/LX/LHX/XD/ZX/EZX | 4 | 2 x SC Single Mode | - | - | - |
| | PoE (10/100 Mbps) | - | - | - | - | - |
| | PoE (10/100/1000 Mbps) | - | - | - | - | - |
| | DI/DO | - | - | - | - | - |
| Network Management | Console | - | - | - | - | - |
| | Redundancy | - | - | - | - | - |
| | Diagnostics | - | - | - | - | - |
| | VLAN | - | - | - | - | - |
| | Configuration | - | - | - | - | - |
| | SNMP | - | - | - | - | - |
| | Security | - | - | - | - | - |
| | Traffic Control | - | - | - | - | - |
| Power | 12 ~ 48 V DC | - | ✓ | ✓ | ✓ | ✓ |
| | 24 ~ 110 V DC | - | - | - | - | - |
| | 100 ~ 240 V AC | ✓ | - | - | - | - |
| | Relay Output | - | ✓ | ✓ | ✓ | - |
| Mechanism | DIN-rail Mount | - | ✓ | ✓ | ✓ | ✓ |
| | Wall Mount | - | ✓ | ✓ | ✓ | ✓ |
| | Rack Mount | ✓ | - | - | - | - |
| | IP Level | 20 | IP30 | IP30 | IP30 | 40 |
| Protection | ESD (Ethernet) | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Surge (EFT for power) | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Power Reverse | - | ✓ | ✓ | ✓ | ✓ |
| Operating Temperature | -10 ~ 60°C (14 ~ 140°F) | -10 ~ 55°C (14 ~ 131°F) | EKI-2728S | ✓ | ✓ | - |
| | -40 ~ 75°C (-40 ~ 167°F) | - | EKI-2728SI | - | - | ✓ |
| | -40 ~ 85°C (-40 ~ 185°F) | - | - | - | - | - |
| Certifications | CE | ✓ | ✓ | ✓ | ✓ | ✓ |
| | FCC | ✓ | ✓ | ✓ | ✓ | ✓ |
| | UL/cUL 60950-1 | - | ✓ | ✓ | ✓ | ✓ |
| | Class 1, Division 2 | - | - | - | - | - |
| | UL 508 | - | - | - | - | - |
| | Others | - | - | - | - | - |

✓ : supported, - : not supported, △ : optional

Industrial PoE Switches & Solutions



| Model Name | | EKI-7708G-4FP/I | EKI-7708G-2FVPI | EKI-7708E-4FP/I | EKI-7710G-2CPI EKI-7710G-2CP | EKI-7710E-2CP EKI-7710E-2CPI | EKI-7712G-4FP EKI-7712G-4FPI |
|-----------------------|------------------------------|---|---|---|--|---|--|
| Description | | 4Giga+4SFP Giga ports Managed Redundant Industrial PoE Switch | 4Giga+2VDSL+2SFP Giga ports Managed Redundant Industrial PoE Switch | 4FE+4SFP Giga ports Managed Redundant Industrial PoE Switch | 8G+2G Port Gigabit Managed Redundant Industrial PoE Switch | 8FE+2G Port Gigabit Managed Redundant Industrial PoE Switch | 8G+4G Port Gigabit Managed Redundant Industrial PoE Switch |
| Interface | Ports Number | 8 | 8 | 8 | 10 | 10 | 12 |
| | 10/100Base-T (X) | - | 4 | - | - | - | - |
| | 100BaseFX | - | - | - | - | - | - |
| | 10/100/1000Base-T (X) | - | - | - | 8 | 8 | 8 |
| | 1000Base-SX/LX/LHX/XD/ZX/EZX | 4 | 4(2SFP+2VDSL) | 4 | 2 | 2 | 4 |
| | PoE (10/100 Mbps) | - | - | 4 | - | 8 | - |
| | PoE (10/100/1000 Mbps) | 4 | - | - | 8 | - | 8 |
| Network Management | DI/DO | - | - | - | - | - | - |
| | Console | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Redundancy | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Diagnostics | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | VLAN | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Configuration | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | SNMP | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Power | Security | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Traffic Control | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | 12 ~ 48 V DC | 48 V _{DC} | 48 V _{DC} | 48 V _{DC} | ✓ | ✓ | 48 V _{DC} |
| | 24 ~ 110 V DC | - | - | - | - | - | - |
| | 100 ~ 240 V AC | - | - | - | - | - | - |
| | Relay Output | ✓ | ✓ | ✓ | - | - | ✓ |
| | DIN-rail Mount | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Mechanism | Wall Mount | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Rack Mount | - | - | - | - | - | - |
| | IP Level | - | 30 | - | IP30 | IP30 | IP30 |
| Protection | ESD (Ethernet) | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Surge (EFT for power) | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Power Reverse | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Operating Temperature | -10 ~ 60°C (14 ~ 140°F) | EKI-7708G-4FP | - | EKI-7708E-4FP | 7710G-2CP | 7710E-2CP | 7712G-4F |
| | -40 ~ 75°C (-40 ~ 167°F) | EKI-7708G-4FPI | ✓ | EKI-7708E-4FPI | 7710G-2CPI | 7710E-2CPI | 7712G-4FI |
| | -40 ~ 85°C (-40 ~ 185°F) | - | - | - | - | - | - |
| Certifications | CE | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | FCC | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | UL/cUL 60950-1 | - | - | - | - | - | - |
| | Class 1, Division 2 | - | - | - | - | - | - |
| | UL 508 | - | - | - | ✓ | ✓ | ✓ |
| | Others | UL 61010 | UL 61010 | UL 61010 | - | - | - |

✓ : supported, - : not supported, △ : optional

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O Modules

8

Industrial I/O and Video Solutions

Industrial Ethernet Solutions

Power Over Ethernet (PoE) Switches



| Model Name | | EKI-7712G-2FVPI | EKI-5624P/5624PI | EKI-5729P/5729PI | EKI-2726FHPI | EKI-2528PAI | EKI-2525P |
|-----------------------|----------------------------------|--|---|---|--|---|---------------------------------|
| Description | | 8Giga+2VDSL+2SFP Giga ports Managed Redundant Industrial PoE Switch | 4FE PoE+2G Unmanaged Ethernet Switch, IEEE802.3af/at, E-Mark, 12V~24V _{DC} | 8GE PoE+2G Unmanaged Ethernet Switch, IEEE802.3af/at, E-Mark, 12V~24V _{DC} | 4G+2 SFP W/ 4 IEEE 802.3 High Power PoE Industrial Wide Temperature Switch | 8-port Industrial PoE Switch with 24/48V _{DC} Power Input and Wide Temperature | 5-port Industrial PoE Switch |
| Interface | Ports Number | 12 | 6 | 8 | 6 | 8 | 5 |
| | 10/100Base-T (X) | - | 4 | - | - | 4 | 1 |
| | 100BaseFX | - | - | - | - | - | - |
| | 10/100/1000Base-T (X) | 8 | 2 | - | 4 | - | - |
| | 1000Base-SX/LX/ LHX/XD/ZX/EZX | 4 (2SFP+2VDSL) | - | - | 2 | - | - |
| | PoE (10/100 Mbps) | - | - | - | 4 (PoE+, 30W) | 4 | 4 |
| | PoE (10/100/1000 Mbps) | - | - | 8 | - | - | - |
| | DI/DO | - | - | - | - | - | - |
| Network Management | Console | ✓ | - | - | - | - | - |
| | Redundancy | ✓ | - | - | - | - | - |
| | Diagnostics | ✓ | - | - | - | - | - |
| | VLAN | ✓ | - | - | - | - | - |
| | Configuration | ✓ | - | - | - | - | - |
| | SNMP | ✓ | - | - | - | - | - |
| | Security | ✓ | - | - | - | - | - |
| Power | Traffic Control | ✓ | - | - | - | - | - |
| | 12 ~ 48 V DC | 48 V _{DC} | 12 ~ 24 V _{DC} | - | 48 V _{DC} | 24/48 V _{DC} | 48 V _{DC} |
| | 24 ~ 110 V DC | - | - | - | - | - | - |
| | 100 ~ 240 V AC | - | - | - | - | - | - |
| Mechanism | Relay Output | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | DIN-rail Mount | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Wall Mount | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Rack Mount | - | - | - | - | - | - |
| Protection | IP Level | IP30 | IP30 | IP30 | IP30 | IP30 | IP30 |
| | ESD (Ethernet) | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Surge (EFT for power) | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Power Reverse | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Operating Temperature | -10 ~ 60°C (14 ~ 140°F) | - | ✓ | ✓ | - | - | ✓ |
| | -40 ~ 75°C (-40 ~ 167°F) | ✓ | ✓ | ✓ | ✓ | ✓ | - |
| | -40 ~ 85°C (-40 ~ 185°F) | - | - | - | - | - | - |
| Certifications | CE | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | FCC | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | UL/cUL 60950-1 | - | ✓ | ✓ | - | - | ✓ |
| | Class 1, Division 2 | - | - | - | - | - | - |
| | UL 508 | - | - | - | ✓ | ✓ | - |
| Others | Others | UL 61010 | ✓ | ✓ | - | - | - |

✓ : supported, - : not supported, △ : optional

Power Over Ethernet (PoE) Switches



| Model Name | | EKI-2526PI | EKI-2525PA |
|-----------------------|------------------------------|--|--|
| Description | | 6-port Industrial PoE Switch with Wide Temperature | 5-port Industrial PoE Switch with 24/48 V DC Power Input |
| Interface | Ports Number | 6 | 5 |
| | 10/100Base-T (X) | 2 | 1 |
| | 100BaseFX | - | - |
| | 10/100/1000Base-T (X) | - | - |
| | 1000Base-SX/LX/LHX/XD/ZX/EZX | - | - |
| | PoE (10/100 Mbps) | 4 | 4 |
| | PoE (10/100/1000 Mbps) | - | - |
| | DI/DO | - | - |
| Network Management | Console | - | - |
| | Redundancy | - | - |
| | Diagnostics | - | - |
| | VLAN | - | - |
| | Configuration | - | - |
| | SNMP | - | - |
| | Security | - | - |
| | Traffic Control | - | - |
| Power | 12 ~ 48 V DC | 48 V _{DC} | 24/48 V _{DC} |
| | 24 ~ 110 V DC | - | - |
| | 100 ~ 240 V AC | - | - |
| | Relay Output | ✓ | ✓ |
| Mechanism | DIN-rail Mount | ✓ | ✓ |
| | Wall Mount | ✓ | ✓ |
| | Rack Mount | - | - |
| | IP Level | IP30 | IP30 |
| Protection | ESD (Ethernet) | ✓ | ✓ |
| | Surge (EFT for power) | ✓ | ✓ |
| | Power Reverse | ✓ | ✓ |
| Operating Temperature | -10 ~ 60°C (14 ~ 140°F) | - | ✓ |
| | -40 ~ 75°C (-40 ~ 167°F) | ✓ | - |
| | -40 ~ 85°C (-40 ~ 185°F) | - | - |
| Certifications | CE | ✓ | ✓ |
| | FCC | ✓ | ✓ |
| | UL/cUL 60950-1 | ✓ | - |
| | Class 1, Division 2 | - | - |
| | UL 508 | - | ✓ |
| | Others | - | - |

✓ : supported, - : not supported, △ : optional

Media Converters



| Model Name | | EKI-2741F/FI/SX/SXI/LX/LXI | EKI-2541M/MI/S/SI |
|-----------------------|------------------------------|--|--|
| Description | | 10/100/1000TX to Fiber Optic Gigabit Industrial Media Converters | 10/100TX to Multi-mode / Single-mode SC Type Fiber Optic Industrial Media Converters |
| Interface | Ports Number | 2 | 2 |
| | 10/100Base-T (X) | - | 1 |
| | 100BaseFX | - | 1 |
| | 10/100/1000Base-T (X) | 1 | - |
| | 1000Base-SX/LX/LHX/XD/ZX/EZX | 1 | - |
| | PoE (10/100 Mbps) | - | - |
| | PoE (10/100/1000 Mbps) | - | - |
| | DI/DO | - | - |
| Network Management | Console | - | - |
| | Redundancy | - | - |
| | Diagnostics | - | - |
| | VLAN | - | - |
| | Configuration | - | - |
| | SNMP | - | - |
| | Security | - | - |
| | Traffic Control | - | - |
| Power | 12 ~ 48 V DC | ✓ | ✓ |
| | 24 ~ 110 V DC | - | - |
| | 100 ~ 240 V AC | - | - |
| | Relay Output | ✓ | ✓ |
| Mechanism | DIN-rail Mount | ✓ | ✓ |
| | Wall Mount | ✓ | ✓ |
| | Rack Mount | - | - |
| | IP Level | IP30 | IP30 |
| Protection | ESD (Ethernet) | ✓ | ✓ |
| | Surge (EFT for power) | ✓ | ✓ |
| | Power Reverse | ✓ | ✓ |
| Operating Temperature | -10 ~ 60°C (14 ~ 140°F) | EKI-2741F/SX/LX | EKI-2541M |
| | -40 ~ 75°C (-40 ~ 167°F) | EKI-2741F/SXI/LXI | EKI-2541MI/SI |
| | -40 ~ 85°C (-40 ~ 185°F) | - | - |
| | CE | ✓ | ✓ |
| Certifications | FCC | ✓ | ✓ |
| | UL/cUL 60950-1 | ✓ | ✓ |
| | Class 1, Division 2 | ✓ | ✓ |
| | UL 508 | ✓ | ✓ |
| | Others | - | - |

Industrial Wireless and Protocol Gateway Solutions

Wireless Access Points/Client



Wireless Devices



| Model Name | | EKI-6331AN | EKI-6332GN |
|-----------------------|--------------------------|---------------------------------|-----------------------------------|
| Description | | IEEE 802.11 a/n Wi-Fi AP/Client | IEEE 802.11 b/g/n Wi-Fi AP/Client |
| Interface | IEEE Standard | IEEE 802.11 a/n | 802.11 b/g/n |
| | 100BaseFX | ✓ | ✓ |
| | 1000BaseFX | - | - |
| RF | Frequency | 2.4GHz | 5GHz |
| | MIMO | 2T2R | 2T2R |
| | Multi-Hopping | ✓ | ✓ |
| | Mobility/Roaming | ✓ | ✓ |
| Operating Mode | Mesh | - | - |
| | Mobility/Roaming | - | - |
| | Multi-Hopping | - | - |
| | AP/CPE | ✓ | ✓ |
| Power | PoE | Passive 24V | Passive 24V |
| | Power Input Voltage | 24V _{DC} | 24V _{DC} |
| | Redundant DC Power Input | - | - |
| Mechanism | DIN-rail Mount | - | - |
| | Wall Mount | - | - |
| | VESA Mount | - | - |
| | Pole Mount | ✓ | ✓ |
| | IP Grade | IP55 | IP55 |
| Operating Temperature | -20 ~ 70°C (-4 ~ 158°F) | ✓ | ✓ |
| | -40 ~ 70°C (-40 ~ 158°F) | - | - |
| Certifications | CE | ✓ | ✓ |
| | FCC | ✓ | ✓ |
| | Others | Telec, ANATEL | Telec |

* Note: Transmit Output Power & Receive Sensitivity are specified on data sheet.

✓ : supported, - : not supported, △ : optional

| Model Name | | EKI-1361 EKI-1362 | EKI-1361-MB EKI-1362-MB | EKI-6333AC |
|-----------------------|--|---|--|--|
| Description | | 1/2-port RS-232/422/485 to 802.11b/g/n WLAN Serial Device Server | 1/2-port RS-232/422/485 to 802.11b/g/n WLAN Modbus Gateway | IEEE 802.11 a/b/g/n Wi-Fi AP |
| Connectivity | 10/100Base-TX, Fixed | ✓ | ✓ | - |
| | 10/100/1000Base-T, Fixed | - | - | ✓ |
| | RS-232 only | - | - | - |
| | RS-232/422/485 | ✓ | ✓ | - |
| Operating Mode | Serial connector type | DB9 Male | DB9 Male | - |
| | Mobility/Roaming | ✓ | ✓ | - |
| | Multi-Hopping | - | - | - |
| Enclosure & Mount kit | AP/CPE | - | - | ✓ |
| | Enclosure | IP30 | IP30 | IP30 |
| | DIN-rail | ✓ | ✓ | ✓ |
| | Wall | ✓ | ✓ | ✓ |
| Power | VESA Mount | - | - | - |
| | Pole Mount | - | - | - |
| | Power Input (V _{DC}) | 12~48V | 12~48V | 12~48V |
| | Power input (PoE) | - | - | - |
| Environment | Power connector | Terminal block | Terminal block | Terminal block |
| | Power Consumption (12/24/48VDC) Watts | 8W (EKI-1361) 9W (EKI-1362) | 8W (EKI-1361-MB) 9W (EKI-1362-MB) | 8W |
| | Operating Temp. | -40 ~ 75°C | -40 ~ 75°C | -40 ~ 75°C |
| Software | Operating Humidity | 10 ~ 95% | 10 ~ 95% | 10 ~ 95% |
| | Input Reverse Protection | ✓ | ✓ | ✓ |
| | Network Protocol | - | Modbus TCP, Modbus RTU/ASCII | - |
| | Firewall | - | - | - |
| WLAN | Router | - | - | - |
| | Configuration Options | Web-base, windows utility | Web-base, windows utility | Web-base |
| | Authentication | Username/Password | Username/Password | Username/Password |
| | Standard Operation Mode | VCOM, USDB mode (TCP/UDP server, TCP/UDP client), Pair connection/Access Point Mode | Pair connection/Access Point Mode/ Modbus RTU Master/Slave, Modbus ASCII Master/ Slave | Access Point |
| RF | IEEE Standard | a/b/g/n | a/b/g/n | a/b/g/n |
| | Radio Number | 1 | 1 | 1 |
| | Security | WEP, WPA/WPA2-Personal, WPA/WPA2-Enterprise | WEP, WPA/WPA2-Personal, WPA/WPA2-Enterprise | WEP, WAP/WAP2-Persona, WAP/WAP2-Enterprise |
| Cellular | MIMO | 2T2R | 2T2R | 2T2R |
| | Maximum Transmit Output Power | 19dBm (11n) | 19dBm (11n) | 19dBm (11n) |
| | Receive Sensitivity | -93dBm (11g Rx0+Rx1) | -93dBm (11g Rx0+Rx1) | -93dBm (11g Rx0+Rx1) |
| | Antenna Connector | R-SMA | R-SMA | R-SMA |
| Certification | Standard | - | - | - |
| | Five-band option in UMTS | - | - | - |
| | Quad-band option in EDGE/GSM | - | - | - |
| | Certification (GCF, PTCRB) | - | - | - |
| | UL60950-1 | - | - | - |
| | EN60950-1 | - | - | - |
| | CE (EN55022 class A, EN55024) | ✓ | ✓ | ✓ |
| | FCC (part 15 subpart B class A) | ✓ | ✓ | ✓ |
| | Hazardous Location (Class I, Division 2) | - | - | - |
| | Radio (EN 301 489-1/-4, EN 301 511) | - | - | - |
| | Radio (FCC part 22H, part 24E) | - | - | - |
| | EN 50155 | - | - | - |

Fieldbus Gateway



| Model Name | | EKI-1221IPNMB | EKI-1221IEIMB | EKI-1242EIMS | EKI-1242PNMS | EKI-1242ECMS | EKI-1242BNMS |
|-----------------------|--|---|--|--|--|--|--|
| Description | | Modbus TCP to PROFINET Protocol Gateway | Modbus TCP to EtherNet/IP Protocol Gateway | Modbus RTU/TCP to EtherNet/IP Fieldbus gateway | ModbusRTU/TCP to PROFINET Fieldbus gateway | ModbusRTU/TCP to EtherCAT Fieldbus gateway | ModbusRTU/TCP to BACnet Fieldbus gateway |
| Connectivity | 10/100Base-TX, Fixed | 2 | 2 | 4 | 4 | 4 | 4 |
| | 10/100/1000Base-T, Fixed | - | - | - | - | - | - |
| | RS-232 only | - | - | - | - | - | - |
| | RS-232/422/485 | - | - | 2 | 2 | 2 | 2 |
| | Serial Connector Type | - | - | DB9 male | DB9 male | DB9 male | DB9 male |
| Operating Mode | Mobility/Roaming | - | - | - | - | - | - |
| | Multi-Hopping | - | - | - | - | - | - |
| | AP/CPE | - | - | - | - | - | - |
| Enclosure & Mount kit | Enclosure | IP30 | IP30 | IP30 | IP30 | IP30 | IP30 |
| | DIN-rail | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Wall | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | VESA Mount | - | - | - | - | - | - |
| | Pole Mount | - | - | - | - | - | - |
| Power | Power Input (V _{DC}) | (12~48V) | (12~48V) | (12~48V) | (12~48V) | (12~48V) | (12~48V) |
| | Power input (PoE) | - | - | - | - | - | - |
| | Power connector | Terminal block | Terminal block | Terminal block | Terminal block | Terminal block | Terminal block |
| | Power Consumption (12/24/48VDC) Watts | 5.2W | 5.2W | 5.2W | 5.2W | 5.2W | 5.2W |
| Environment | Operating Temp. | -40~70°C | -40~70°C | -10~60°C | -10~60°C | -10~60°C | -10~60°C |
| | Operating Humidity | 10~95% | 10~95% | 10~95% | 10~95% | 10~95% | 10~95% |
| | Input Reverse Protection | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Software | Network Protocol | Modbus TCP PROFINET | Modbus TCP EtherNet/IP | Modbus RTU/TCP EtherNet/IP | Modbus RTU/TCP PROFINET | Modbus RTU/TCP EtherCAT | Modbus RTU/TCP BACnet |
| | Firewall | - | - | - | - | - | - |
| | Router | - | - | - | - | - | - |
| | Configuration Options | Web-based | Web-based | Web-based | Web-based | Web-based | Web-based |
| | Authentication | Username/Password | Username/Password | Username/Password | Username/Password | Username/Password | Username/Password |
| | Standard Operation mode | Modbus/TCP Master PROFINET Slave | Modbus/TCP Master PROFINET Adaptor | ModbusRTU/TCP Master Ethernet/IP Adapter | ModbusRTU/TCP Master PROFINET Slave | ModbusRTU/TCP Master EtherCAT Slave | ModbusRTU/TCP Master BACnet Slave |
| WLAN | IEEE Standard | - | - | - | - | - | - |
| | Radio Number | - | - | - | - | - | - |
| | Security | - | - | - | - | - | - |
| RF | MIMO | - | - | - | - | - | - |
| | Maximum Transmit Output Power | - | - | - | - | - | - |
| | Receive Sensitivity | - | - | - | - | - | - |
| | Antenna Connector | - | - | - | - | - | - |
| Cellular | Standard | - | - | - | - | - | - |
| | Five-band Options UMTS | - | - | - | - | - | - |
| | Quad-band Options EDGE/GSM | - | - | - | - | - | - |
| | Certification (GCF, PTCRB) | - | - | - | - | - | - |
| Certification | UL60950-1 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | EN60950-1 | - | - | - | - | - | - |
| | CE (EN55022 class A, EN55024) | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | FCC (part 15 subpart B class A) | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Hazardous Location (Class I, Division 2) | - | - | - | - | - | - |
| | Radio (EN 301 489-1/-4, EN 301 511) | - | - | - | - | - | - |
| | Radio (FCC part 22H, part 24E) | - | - | - | - | - | - |
| | | EN 50155 | - | - | - | - | - |

✓ : supported, - : not supported, △ : optional

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O Modules

8


Industrial I/O and Video Solutions

Industrial Wireless and Protocol Gateway Solutions

Modbus Gateway Modbus Router



Serial Device Servers



| Model Name | | EKI-1221/CI/I EKI-1222/CI/I EKI-1224/CI/I |
|-----------------------|-------------------------------------|--|
| Description | | 1/2/4-Port Modbus Gateway |
| Connectivity | 10/100Base-TX, Fixed | 2 |
| | | 10/100/1000Based-T, Fixed |
| | | RS-232 only |
| | | RS-232/422/485 |
| Operating Mode | Serial Connector Type | DB9 Male |
| | | Mobility/Roaming |
| | | Multi-Hopping |
| | | AP/CPE |
| Enclosure & Mount Kit | Enclosure | IP30 |
| | | DIN-rail |
| | | Wall |
| | | VESA Mount |
| Power | Power Input (V _{DC}) | 2* (12~48V) |
| | | Power Input (PoE) |
| | | Power Connector |
| | | Power Consumption (12/24/48V _{DC}) Watts |
| Environment | Operating Temp. | EKI-1221/EKI-1222/ EKI-1224: -10 ~ 60°C |
| | | 'CI & I' models: -40 ~ 70°C |
| | | Operating Humidity |
| | | Input Reverse Protection |
| Software | Network Protocol | Modbus RTU, Modbus TCP, Modbus ASCII |
| | | Firewall |
| | | Router |
| | | Configuration Options |
| WLAN | IEEE Standard | Modbus RTU Master/Slave mode |
| | | Radio Number |
| | | Security |
| | | MIMO |
| RF | Maximum Transmit Output Power | Modbus ASCII Master/ Slave mode |
| | | Receive Sensitivity |
| | | Antenna Connector |
| | | Standard |
| Cellular | Five-band Options UMTS | - |
| | | Quad-band Options EDGE/GSM |
| | | Certification (GCF, PTCRB) |
| | | UL60950-1 |
| Certification | EN60950-1 | ✓ |
| | | CE (EN55022 class A, EN55024) |
| | | FCC (part 15 subpart B class A) |
| | | Hazardous Location (Class I, Division 2) |
| | Radio (EN 301 489-1/-4, EN 301 511) | ✓ |
| | | Radio (FCC part 22H, part 24E) |
| | | EN 50155 |
| | | - |

| Model Name | | EKI-1521/CI/I EKI-1522/CI/I EKI-1524/CI/I | EKI-1528I-DR EKI-1528CI-DR | EKI-1528I/TI EKI-1526I/TI | ADAM-4571/L ADAM-4570/L |
|-----------------------|--|--|--|--|---|
| Description | | 1/2/4-port RS-232/422/485 Serial Device Server | 8-port RS-232/422/485 Device Server | 8/16-port RS-232/422/485 Serial Device Server | 1/2-port RS-232/422/485 Serial Device Server |
| Connectivity | 10/100Base-TX, Fixed | 2 | 2 | - | 1 |
| | | 10/100/1000Based-T, Fixed | - | 2 | - |
| | | RS-232 only | - | - | ADAM-4571/4570L: 1/2 |
| | | RS-232/422/485 | 1/2/4 (CI version: RS-422/485) | 8/16 | ADAM-4571/4570: 1/2 |
| Operating Mode | Serial Connector Type | DB9 Male | DB9 Male | DB9 male | ADAM-4571/L: DB9 Male |
| | | Enclosure | IP30 | SECC chassis | ADAM-4570/L: 10-pin RJ48 |
| | | DIN-rail | ✓ | Rackmount | ✓ |
| | | Wall | ✓ | - | ✓ |
| Enclosure & Mount Kit | VESA Mount | - | - | - | - |
| | | Pole Mount | - | - | - |
| Power | Power Input (V _{DC}) | 2* (12~48V) | 2* (12~48V) | EKI-1528(I)/ EKI-1526(I): 100 ~ 240 V _{AC} , 50 ~ 60 Hz | (10~30V) |
| | | Power Input (PoE) | - | EKI-1528T(I)/ EKI-1526T(I): 12 ~ 48 V _{DC} , Terminal Block | - |
| | | Power Connector | Terminal block | 6-pin removable screw terminal | Terminal block |
| | | Power Consumption (12/24/48V _{DC}) Watts | 5.2 W (EKI-1521/ EKI-1522) 6.3 W (EKI-1524) | 5.6 W | 2.5 W |
| Environment | Operating Temp. | EKI-1521/EKI-1522/ EKI-1524: -10 ~ 60°C | -40 ~ 70°C | -10 ~ 60°C (14 ~ 140°F) | -10 ~ 60°C |
| | | 'CI & I' models: -40 ~ 70°C | - | 'I' Model: -40 ~ 75°C (-40 ~ 167°F) | - |
| | | Operating Humidity | 5 ~ 95% | 10 ~ 95% | 5 ~ 95% |
| | | Input Reverse Protection | - | - | - |
| Software | Network Protocol | ARP, ICMP, IPv4, TCP, UDP, BOOTP, DHCP Client, Auto IP, Telnet, SNMP, HTTP, DNS, SMTP, NTP | ARP, ICMP, IPv4, TCP, UDP, BOOTP, DHCP Client, Auto IP, Telnet, SNMP, HTTP, DNS, SMTP, NTP | ARP, ICMP, IPv4, TCP, UDP, BOOTP, DHCP Client, Auto IP, Telnet, SNMP, HTTP, DNS, SMTP, NTP | ARP, ICMP, IPv4, TCP, UDP, BOOTP, DHCP Client, Auto IP, Telnet, SNMP, HTTP, DNS, SMTP |
| | | Firewall | - | - | - |
| | | Router | - | - | - |
| | | Configuration Options | Windows utility, Telnet console, Web Browser | Windows utility, Telnet console, Web Browser, serial console | Windows utility, Telnet console, Web Browser |
| WLAN | IEEE Standard | COM Port redirection (Virtual COM) TCP/UDP Server (Polling) Mode | COM Port redirection (Virtual COM) TCP/UDP Server (Polling) Mode | COM Port redirection (Virtual COM) TCP/UDP Server (Polling) Mode | COM Port redirection (Virtual COM) TCP/UDP Server (Polling) Mode |
| | | TCP/UDP Client (event handling) Mode | TCP/UDP Client (event handling) Mode | TCP/UDP Client (event handling) Mode | TCP/UDP Client (event handling) Mode |
| | | Pair Connection (P2P) Mode | Pair Connection (P2P) Mode | Pair Connection (P2P) Mode | Pair Connection (P2P) Mode |
| | | RFC-2217 Mode | RFC-2217 Mode | RFC-2217 Mode | RFC-2217 Mode |
| Certification | UL60950-1 | ✓ | ✓ | - | - |
| | | EN60950-1 | ✓ | ✓ | ✓ |
| | | CE (EN55022 class A, EN55024) | ✓ | ✓ | ✓ |
| | | FCC (part 15 subpart B class A) | ✓ | ✓ | ✓ |
| | Hazardous Location (Class I, Division 2) | ✓ | - | - | - |
| | | Radio (EN 301 489-1/-4, EN 301 511) | - | - | - |
| | | Radio (FCC part 22H, part 24E) | - | - | - |
| | | EN 50155 | - | - | - |

✓ : supported, - : not supported, △ : optional

Compact Ethernet
Media ConvertersCompact Ethernet
Gigabit Media
ConvertersPoE, PoE+ Gigabit
Media Converters

| Model Name | | MiniMc with LFPT | IE-MiniMc with LFPT | Giga-MiniMc with LFPT | IE-Giga-MiniMc with LFPT | PoE Giga-MiniMc w/LFPT | PoE+ Giga-MiniMc w/LFPT | IE-MultiWay |
|--------------------|---------------------------|---|---|--|---|--|---|--|
| Part Numbers | | 855-11621, 855-11623, 855-11619 | 855-19822 | 856-11700, 856-11701, 856-11703 | 856-18930, 856-18931 | PoE:857-11811, 857-11812, 857-11814 | 857-11911, 857-11912 | 858-11121 |
| Description | | Two Port Copper to Fiber compact 10/100 Media Converter with Link Fault Pass Through, unmanaged | Industrial Two Port Copper to Fiber compact 10/100Media Converter with Link Fault Pass Through, unmanaged | Two Port Copper to Fiber 10/100/1000 Media Converter with Link Fault Pass Through, Unmanaged | Industrial Two Port Copper to Fiber 10/100/1000 Media Converter with Link Fault Pass Through, unmanaged | PoE capable Unmanaged 10/100/1000 Media Converters | PoE+ capable Unmanaged 10/100/1000 Media Converters | Four Port Managed 10/100/1000 switch, with SFP capability, compact form factor |
| Interface | Ports Number | 2 | 2 | 2 | 2 | 3 | 3 | 4 |
| | 10/100Base-T (X) | ✓ | ✓ | - | - | - | - | - |
| | 100BaseFX | ✓ | ✓ | ✓ | ✓ | ✓ | - | ✓ |
| | 10/100/1000Base-T (X) | - | - | ✓ | ✓ | 2 | 2 | ✓ |
| | 1000Base-SX/LX | ✓ | ✓ | ✓ | ✓ | 1 | 1 | ✓ |
| | PoE (10/100/1000 Mbps) | - | - | - | - | 1 | - | - |
| | PoE+ (10/100/1000 Mbps) | - | - | - | - | ✓ | 2 | - |
| | PoE Reset DSX | - | - | - | - | ✓ | ✓ | - |
| Network Management | SFP Port Model Option | ✓ | - | ✓ | - | ✓ | ✓ | ✓ |
| | LFPT | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Redundancy | - | - | - | - | - | - | ✓ |
| | Diagnostics | - | - | - | - | - | - | ✓ |
| | VLAN | - | - | - | - | - | - | ✓ |
| | Configuration | - | - | - | - | - | - | ✓ |
| | SNMP | - | - | - | - | - | - | ✓ |
| | Security | - | - | - | - | - | - | ✓ |
| Power | Jumbo Frames | 1916 | 1916 | 10240 | 10240 | 10240 | - | 10240 |
| | 100-240V _{AC} | ✓ | ✓ | ✓ | ✓ | ✓ | - | ✓ |
| | DC voltage | - | 7-50 V _{DC} | - | 7-50 V _{DC} | - | - | 480 V _{DC} |
| Hardware Mounting | DIN-rail Mount | ✓ | ✓ | ✓ | ✓ | ✓ | - | ✓ |
| | Wall Mount | ✓ | ✓ | ✓ | ✓ | ✓ | - | ✓ |
| | Rack Mount | ✓ | ✓ | ✓ | ✓ | ✓ | - | ✓ |
| | IP Level | - | - | - | - | - | - | - |
| Protection | ESD (Ethernet) | ✓ | ✓ | ✓ | - | - | - | - |
| | Surge (EFT for power) | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Reverse Polarity | ✓ | ✓ | ✓ | ✓ | ✓ | - | ✓ |
| Operating Temp | 0 ~ 50°C | ✓ | - | ✓ | - | ✓ | - | - |
| | -25 ~ 85°C (-13 ~ +185°F) | - | - | - | ✓ | - | - | - |
| | -40 ~ 85°C (-40 ~ 185°F) | - | ✓ | - | - | - | - | ✓ |
| Certifications | CE | ✓ | ✓ | ✓ | ✓ | ✓ | - | ✓ |
| | FCC | ✓ | ✓ | ✓ | ✓ | ✓ | - | ✓ |
| | UL/cUL 60950-1 | ✓ | ✓ | ✓ | ✓ | ✓ | - | ✓ |
| | Class 1, Division 2 | - | - | - | - | - | - | - |
| | UL 508 | - | - | - | - | - | - | - |
| | MSA compliant | - | - | - | - | - | - | - |
| | Class 1, Eye-safe Lasers | ✓ | ✓ | ✓ | ✓ | ✓ | - | ✓ |

✓ : supported, - : not supported, △ : optional

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O Modules

8

Industrial I/O and Video Solutions

Industrial Wireless and Protocol Gateway Solutions

Serial Converters, Isolators and Surge Protectors



| Model Name | | 485DRCI | 485SD9R, 485SD9TB | FOSTCDRI | 232OPDRI | 485OPDRI | HESP4DR |
|----------------|--------------------------------|---|---|---|---|---|--|
| Description | | Triple Isolated RS-232 to RS-422/485 Converter | Port Powered RS-232 to RS-485 Converter | Triple Isolated RS-232/422/485 to Fiber Converter | Triple Isolated RS-232 DIN Rail Repeater | Triple Isolated RS-485/422 DIN Rail Repeater | Three-stage DIN Rail RS422/485 Surge Protector |
| Function | | Serial Converter | | | Isolator / Repeater | | Surge Protector |
| Key Features | | Class 1 Division 2/ Tripple Isolation, Oil and Gas Applications | Small Form Factor, Port Powered | Fiber to Serial | Class 1 Division 2/ Tripple Isolation, Oil and Gas Applications | Class 1 Division 2/ Tripple Isolation, Oil and Gas Applications | High Energy Surge Protector |
| Specifications | Temp | -40 to 80°C | 0 to 70 C | -40 to 80°C | -40 to 80°C | -40 to 80°C | -40 to 80°C |
| | Isolation | ✓ | - | ✓ | ✓ | ✓ | - |
| | Input Power | 10 to 48 V _{DC} | Port Powered from RS-232 Ports | 10 to 48 V _{DC} | 10 to 48 V _{DC} | 10 to 48 V _{DC} | - |
| | Dataline Surge Protection | ✓ | - | ✓ | ✓ | ✓ | v (5 lines) |
| | RS-232 Connector | DB9 female | DB9 female | Removable Terminal Blocks | DB9 female & DB9 male | - | - |
| | RS-422/485 Connector and Power | Remmovable Terminal Blocks | DB9 female or Terminal Block | Remmovable Terminal Blocks | - | Remmovable Terminal Blocks | Terminal Block |
| | Maximum Buad Rate | 115.2 kbps | 115.2 kbps | 115.2 kbps | 115.2 kbps | 115.2 kbps | - |
| | Mounting | DIN Rail | In-line | DIN Rail | DIN Rail | DIN Rail | DIN Rail |
| | Industrial Rating | Light | - | Light | Light | Light | Light |
| | UL Rating | UL 508 | - | UL 508 | UL 508 | UL 508 | - |
| | Class 1 Division 2 | ✓ | - | ✓ | ✓ | ✓ | - |

✓ : supported, - : not supported, △ : optional

USB to Serial Converters



| Model Name | BB-USOPTL4DR-2 | BB-USOPTL4 | BB-USO9ML2 | BB-USO9ML2-4P | BB-USOPTL4-4P |
|--------------------------------|--|--|--|--|--|
| Series | Industrial | Industrial | Industrial | Industrial | Industrial |
| Description | USB to RS-422, RS-485 Isolated Converter, Industrial | USB to RS-422, RS-485 Isolated Converter, Commercial | USB to RS-232 Isolated Converter, Commercial | USB to RS-232 Isolated Converter, Industrial | USB to RS-422, RS-485 Isolated Converter, Industrial |
| Industrial Rating | Light | Light | Light | Light | Light |
| RS-232 | - | - | ✓ | ✓ | - |
| RS-422 | ✓ | ✓ | - | - | ✓ |
| RS-485 2-WIRE | ✓ | ✓ | - | - | ✓ |
| RS-485 4-WIRE | ✓ | ✓ | - | - | ✓ |
| TTL 5 V | - | - | - | - | - |
| TTL 3.3 V | - | - | - | - | - |
| SERIAL PORTS | 2 | 1 | 1 | 4 | 4 |
| High Retention USB Ports | ✓ | ✓ | - | ✓ | ✓ |
| Isolated | ✓ | ✓ | ✓ | ✓ | ✓ |
| Mounting | DIN | In Line | In Line | Panel | Panel |
| Shock and Vibration | - | - | - | - | - |
| Heavy Industrial | - | - | - | - | - |
| Serial Connector | Removable Terminal Block | Removable Terminal Block | DB9 Male | DB9 Male | Removable Terminal Block |
| Operating Temperature | 0 to 70°C | 0 to 70°C | 0 to 70°C | 0 to 70°C | 0 to 70°C |
| Power Input | USB Bus | USB Bus | USB Bus | USB Bus or 10-30V _{DC} | USB Bus or 10-30V _{DC} |
| Metal Housing | - | - | - | - | - |
| LED Indicators | ✓ | ✓ | ✓ | ✓ | ✓ |
| UL | - | - | - | - | - |
| USB Cable Included | ✓ | ✓ | ✓ | ✓ | ✓ |
| Accessory Serial Cable | - | - | BB-9PAMF6 | BB-9PAMF6 | - |
| Accessory Power Supply | - | - | | BB-MDR-20-24 | BB-MDR-20-24 |
| Operating System | Windows 10 | Windows 10 | Windows 10 | Windows 10 | Windows 10 |
| Unique or Locked Serial Number | Locked | Unique | Unique | Locked | Locked |

✓ : supported, - : not supported, △ : optional

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O Modules

8

Industrial I/O and Video Solutions

Industrial Wireless and Protocol Gateway Solutions


Ethernet to Serial Converters



| Model Name | | VESP211, VESP211-232, VESP211-485 | VESR901 | VESR921-MC | MESR901 | MESR921-MC |
|----------------|--------------------|---|---|---|--|--|
| Description | | Compact Ethernet to Serial Converter | DIN Rail Mount Ethernet to Serial Converter | DIN Rail Mount Ethernet to Serial Converter with Fiber Port | Modbus Ethernet to Modbus Serial Converter | Modbus Ethernet to Modbus Serial Converter with Fiber Port |
| Function | | VCOM, Socket Connection, Paired Mode | | | Modbus | |
| Ethernet | Copper Ports | 1 | 1 | 1 | 1 | 1 |
| | Fiber Ports | - | - | 1 Multi-mode (SC) | - | 1 Multi-mode (SC) |
| Serial | Port Count | 1 | 1 | 1 | 1 | 1 |
| | DB9 | 232 | 232 | 232 | 232 | 232 |
| | Terminal Block | 422/485 | 422/485 | 422/485 | 422/485 | 422/485 |
| Specifications | Temp Spec | -40 to 80°C | -40 to 80°C | -40 to 80°C | -40 to 80°C | -40 to 80°C |
| | Power DC | 10 to 30V _{DC} | 10 to 48V _{DC} | 10 to 48V _{DC} | 10 to 48V _{DC} | 10 to 48V _{DC} |
| | Mounting | Panel | DIN | DIN | DIN | DIN |
| | Class 1 Division 2 | - | ✓ | ✓ | ✓ | ✓ |

Wireless Sensing Network

Industrial Cellular Router

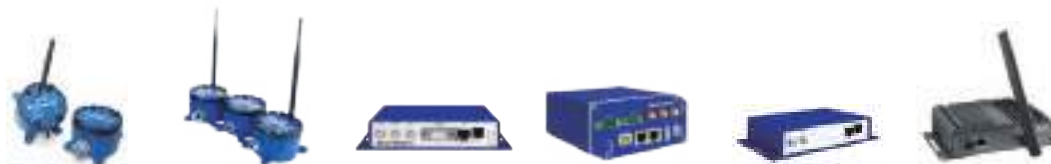

| Model Name | | Wzzard-LRPv Sensor Node | Wzzard | SmartStart | SmartFlex | SmartSwarm 243 | WISE-6610 |
|----------------|-------------------------|------------------------------|----------------------------------|------------------------|-----------------------------|---------------------------------|---|
| Part Number | | BB-WSLxxxxxx | BB-WSDxxxx | BB-SL306x0110-SWH | BB-SR30xxxxxx | BB-SG30000115-43 | WISE-6610-XX00-A |
| Description | | Industrial LoRa Private Node | Intelligent Wireless Sensor Node | Intelligent LTE Router | Flexible, Module LTE Router | Industrial LoRa Private Gateway | LoRaWAN Gateway support up to 100/500 nodes with 868/915MHz |
| Specifications | Mobile Wireless | LoRa | DUST/BLE | GPRS/3G/LTE/WiFi | GPRS/3G/LTE/WiFi | LoRa | LoRaWAN |
| | Communication Interface | A/DI/DO | A/DI/DO | ETH/RS232/IO | ETH/SD/USB/IO/RS232&485/POE | ETH/IO | LoRaWAN |
| | Temp | -40~75 °C | -40~80 °C | -40~75 °C | -40~75 °C | -40~75 °C | -40~75 °C |
| | Power Input | 3.3 V _{DC} | 3.3 V _{DC} | 9 -36 V _{DC} | 10 -69 V _{DC} | 9 -36 V _{DC} | 9~36 V _{DC} |
| | Dimensions (W x H x D) | 95 x 116 x 65 mm | 95 x 116 x 65 mm | 30 x 87 x 127 mm | 55 x 97 x 125 mm | 30 x 87 x 127 mm | 150 x 30 x 83 mm |
| Weight | | 340g | 340g | 187g | 375g | 187g | 187g |

✓ : supported, - : not supported, △ : optional

USB Hubs and Isolators



| Model Name | BB-UHR304 | BB-UHR204 | BB-UH104 | BB-UHR401 | BB-UHR402 |
|--------------------------------|---------------------------------------|-----------------------------|-----------------------------------|----------------------------------|----------------------------------|
| Series | Heavy Duty Hub | Heavy Duty Hub | Hub | Heavy Duty Isolator | Heavy Duty Isolator |
| Description | USB Hub, 4 Port, Isolated, Industrial | USB Hub, 4 Port, Industrial | USB Hub, 4 Port, Light Industrial | USB Isolator, 1 Port, Industrial | USB Isolator, 2 Port, Industrial |
| USB Standard | 2.0 | 2.0 | 2.0 | 2.0 | 2.0 |
| Isolation | 4 KV | - | - | 4 KV | 4 KV |
| Maximum USB Speed | 12 Mbps | 480 Mbps | 480 Mbps | 12 Mbps | 12 Mbps |
| High Retention USB Ports | ✓ | ✓ | ✓ | ✓ | ✓ |
| Downstream Ports | 4 | 4 | 4 | 1 | 2 |
| Operating Temperature | (-)40 to 80 °C | (-)40 to 80 °C | (-)40 to 80 °C | (-)40 to 80 °C | (-)40 to 80 °C |
| Shock and Vibration | ✓ | ✓ | - | ✓ | ✓ |
| Heavy Industrial | ✓ | ✓ | - | ✓ | ✓ |
| USB Bus Power | | ✓ | ✓ | | |
| External Power Inputs | 2 | 2 | - | 1 | 1 |
| Primary External Power Input | Removable Terminal Block | Removable Terminal Block | - | Threaded Barrel Jack | Threaded Barrel Jack |
| Secondary External Power Input | Threaded Barrel Jack | Threaded Barrel Jack | - | - | - |
| Metal Housing | ✓ | ✓ | - | - | - |
| LED Indicators | ✓ | ✓ | - | ✓ | ✓ |
| DIN Mount | ✓ | ✓ | - | ✓ | ✓ |
| Panel Mount | ✓ | ✓ | - | ✓ | ✓ |
| In Line | - | - | - | - | - |
| UL | C1D2 | C1D2 | - | - | - |
| USB Cable Included | ✓ | ✓ | - | ✓ | ✓ |
| Power Supply Included | - | - | - | ✓ | ✓ |
| Accessory Power Supply | BB-MDR-20-24 | BB-MDR-20-24 | - | BB-PS12VLB-INT-MED | BB-PS12VLB-INT-MED |
| Driver | - | - | - | - | - |

✓ : supported, - : not supported, △ : optional

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O Modules

8

Industrial I/O and Video Solutions

Industrial Wireless and Protocol Gateway Solutions

Special Serial Converters



| Model Name | BB-232LP TTL | BB-232LP TTL33 | BB-422TTL | BB-232CL9R | BB-232CLDR | BB-CANFB | BB-CANOP |
|------------------------|-----------------------------|-------------------------------|-----------------------------|----------------------------------|----------------------------------|-------------------------------|-------------------------------|
| Series | TTL Converter | TTL Converter | TTL Converter | Current Loop Converter | Current Loop Converter | CAN (Controller Area Network) | CAN (Controller Area Network) |
| Description | RS-232 to 5 V TTL Converter | RS-232 to 3.3 V TTL Converter | RS-422 to 5 V TTL Converter | RS-232 to Current Loop Converter | RS-232 to Current Loop Converter | CAN Bus to Fiber Repeater | CAN Bus Isolator |
| Industrial Rating | Light | Light | Light | Light | Light | Light | Light |
| Isolated | - | - | - | - | ✓ | ✓ | ✓ |
| 3 Way Isolation | - | - | - | - | - | - | - |
| Mounting | In Line | In Line | In Line | In Line | DIN | DIN | DIN |
| RS-232 | ✓ | ✓ | - | ✓ | ✓ | - | - |
| RS-422 | - | - | ✓ | - | - | - | - |
| SM Fiber | - | - | - | - | - | ✓ | - |
| 3.3 V TTL | - | ✓ | - | - | - | - | - |
| 5 V TTL | ✓ | - | ✓ | - | - | - | - |
| Current Loop | - | - | - | ✓ | ✓ | - | - |
| CAN | - | - | - | - | - | ✓ | ✓ |
| Operating Temperature | 0 to 70 °C | 0 to 70 °C | 0 to 50 °C | 0 to 50 °C | (-)40 to 80 °C | 0 to 70 °C | 0 to 70 °C |
| Input Power | Port Powered | Port Powered | 12 V _{DC} | 12 V _{DC} | 10 to 30 V _{DC} | 10 to 30 V _{DC} | 10 to 30 V _{DC} |
| Port Power Option | ✓ | ✓ | - | - | - | - | - |
| Power Supply Included | - | - | - | - | - | - | - |
| Power Connector | - | - | 2.5 mm plug | Terminal Block | Terminal Block | Terminal Block | Terminal Block |
| RS-232 Connector | DB9 F | DB9 F | - | DB9 F | Terminal Block | - | - |
| TTL Connector | DB9 M | DB9 M | DB25 M | - | - | - | - |
| Current Loop Connector | - | - | - | Terminal Block | Terminal Block | - | - |
| CAN Connector | - | - | - | - | - | Terminal Block | Terminal Block |
| RS-422 Connector | - | - | DB25 F | - | - | - | - |
| Fiber Connector | - | - | - | - | - | ST | - |
| Maximum Baud Rate | 115.2 kbps | 115.2 kbps | 115.2 kbps | 19.2 kbps | 19.2 kbps | 250 kbps | 250 kbps |
| Accessory Serial Cable | BB-9PAMF6 | BB-9PAMF6 | BB-232AMF5 | - | - | - | - |
| Accessory Power Supply | - | - | - | BB-SMI6-12-V-ST | BB-MDR-20-24 | BB-MDR-20-24 | BB-MDR-20-24 |

✓ : supported, - : not supported, △ : optional

IE-SFP Fiber Modules



| Model Name | 808-38101 | 808-38103 | 808-38104 | 808-38519 | 808-38520 |
|--|----------------------------|-----------------------------|----------------------------------|---|---|
| SFP Type | SFP | SFP | SFP | SFP | SFP |
| Part Description | IE-SFP/155-ED, MM850-LC | IE-SFP/155-ED, SM1310-LC | IE-SFP/155-ED, SM1310/PLUS-LC | IE-SFP/155-ED, SSFX-SM1310 / PLUS-LC (1310XMT/1550RCV) | IE-SFP/155-ED, SSFX-SM1550 / PLUS-LC (1550XMT/1310RCV) |
| Typical Speed Mbps | 100 | 100 | 100 | 100 | 100 |
| Mode (Fiber) | Multi Mode | Single Mode | Single Mode | Single Mode | Single Mode |
| BiDi/Single Strand | - | - | - | ✓ | ✓ |
| Wavelength (nm) | 850 | 1310 | 1550 | 1310 | 1550 |
| Connector Type | LC | LC | LC | LC | LC |
| Distance (KM) | 2 | 20 | 40 | 40 | 40 |
| Power (dB) | 14.5 | 21 | 31 | 26 | 26 |
| DDMI | Yes | Yes | Yes | Yes | Yes |
| Temperature | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C |
| Use With SFP P/N (Works in Pair with) | - | - | - | 808-38520 | 808-38519 |
| MSA (Multi-Source Aggrement) | ✓ | ✓ | ✓ | ✓ | ✓ |
| Laser 1 Class 1 IEC 60825-2 | ✓ | ✓ | ✓ | ✓ | ✓ |
| Telecordia GR-468-CORE | ✓ | ✓ | ✓ | ✓ | ✓ |



| Model Name | 808-38529 | 808-38530 | 808-38201 | 808-38203 | 808-38205 |
|--|---|---|-----------------------------|------------------------------------|--|
| SFP Type | SFP | SFP | SFP | SFP | SFP |
| Part Description | IE-SFP/155-ED, SSFX-SM1310 / LONG-LC (1310XMT/1550RCV) | IE-SFP/155-ED, SSFX-SM1550 / LONG-LC (1550XMT/1310RCV) | IE-SFP/1250-ED, MM850-LC | IE-SFP/1250-ED, SM1310/ PLUS-LC | IE-SFP/ 1250-ED, SM1510/XLONG-LC (LFP260) |
| Typical Speed Mbps | 100 | 100 | 1000 | 1000 | 1000 |
| Mode (Fiber) | Single Mode | Single Mode | Multi Mode | Single Mode | Single Mode |
| BiDi/Single Strand | ✓ | ✓ | - | - | - |
| Wavelength (nm) | 1310 | 1550 | 850 | 1310 | 1510 |
| Connector Type | LC | LC | LC | LC | LC |
| Distance (KM) | 60 | 60 | 220/550m | 30 | 70 |
| Power (dB) | 29 | 29 | 7.5 | 17 | 21 |
| DDMI | ✓ | ✓ | ✓ | ✓ | ✓ |
| Temperature | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C |
| Use With SFP P/N (Works in Pair with) | 808-38530 | 808-38529 | - | - | - |
| MSA (Multi-Source Aggrement) | ✓ | ✓ | ✓ | ✓ | ✓ |
| Laser 1 Class 1 IEC 60825-2 | ✓ | ✓ | ✓ | ✓ | ✓ |
| Telecordia GR-468-CORE | ✓ | ✓ | ✓ | ✓ | ✓ |

✓ : supported, - : not supported, △ : optional

1

Software and Industry
Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and
Monitors

5

Automation Computers
and Controllers

6

Industrial
Communication

7

Remote I/O Modules

8

Industrial I/O and
Video Solutions

Industrial Wireless and Protocol Gateway Solutions



| Model Name | 808-38206 | 808-38721 | 808-38722 | 808-38723 |
|---------------------------------------|---------------------------|--|--|--|
| SFP Type | SFP | SFP | SFP | SFP |
| Part Description | IE-SFP/1250-ED, MM1310-LC | IE-SFP/1250-ED, SSLX-SM1310-LC (1310XMT/1550RCV) | IE-SFP/1250-ED, SSLX-SM1550-LC (1550XMT/1310RCV) | IE-SFP/1250-ED, SSLX-SM1310 /PLUS-LC (1310XMT/1550RCV) |
| Typical Speed Mbps | 1000 | 1000 | 1000 | 1000 |
| Mode (Fiber) | Multi Mode | Single Mode | Single Mode | Single Mode |
| BiDi/Single Strand | - | ✓ | ✓ | ✓ |
| Wavelength (nm) | 1310 | 1310 | 1550 | 1310 |
| Connector Type | LC | LC | LC | LC |
| Distance (KM) | 2 | 20 | 20 | 40 |
| Power (dB) | 10 | 15 | 15 | 20 |
| DDMI | ✓ | ✓ | ✓ | ✓ |
| Temperature | -40 to +85°C | -40 to +85°C | -40 to +85°C | -40 to +85°C |
| Use With SFP P/N (Works in Pair with) | - | 808-38722 | 808-38721 | 808-38724 |
| MSA (Multi-Source Agreement) | ✓ | ✓ | ✓ | ✓ |
| Laser 1 Class 1 IEC 60825-2 | ✓ | ✓ | ✓ | ✓ |
| Telecordia GR-468-CORE | ✓ | ✓ | ✓ | ✓ |



| Model Name | 808-38724 | 808-38600 | 808-38601 |
|---------------------------------------|--|----------------------------|-----------------------------|
| SFP Type | SFP | SFP+ | SFP+ |
| Part Description | IE-SFP/1250-ED, SSLX-SM1550 /PLUS-LC (1550XMT/1310RCV) | IE-SFP+SR/10G-ED, MM850-LC | IE-SFP+LR/10G-ED, SM1310-LC |
| Typical Speed Mbps | 1000 | 10G | 10G |
| Mode (Fiber) | Single Mode | Multi Mode | Single Mode |
| BiDi/Single Strand | ✓ | - | - |
| Wavelength (nm) | 1550 | 850 | 1310 |
| Connector Type | LC | LC | LC |
| Distance (KM) | 40 | 33 | 10 |
| Power (dB) | 20 | 2.8 | 8.4 |
| DDMI | ✓ | ✓ | ✓ |
| Temperature | -40 to +85°C | -10 to +70°C | -10 to +70°C |
| Use With SFP P/N (Works in Pair with) | 808-38723 | - | - |
| MSA (Multi-Source Agreement) | ✓ | ✓ | ✓ |
| Laser 1 Class 1 IEC 60825-2 | ✓ | ✓ | ✓ |
| Telecordia GR-468-CORE | ✓ | ✓ | ✓ |

✓ : supported, - : not supported, △ : optional

7

Remote I/O & Wireless Sensing Modules

7-2 Wireless IoT Sensing Devices: WISE-4000, WISE-2000

7-9 Ethernet I/O Modules: ADAM-6000

7-15 RS-485 I/O Modules: ADAM-4000



Wireless IoT Sensing Devices


Overview

Coinciding with the development of wireless and cloud technologies, remote management is now distributed across wider areas due to the availability of cloud services. To shorten the gap between the edge and the cloud, Advantech has launched wireless sensing devices that can directly pass data from the edge to different cloud platforms via MQTT and RESTful APIs.

For wide area communication, WISE-4000 I/O modules and sensor nodes have been designed with LPWAN, LoRa, NB-IoT/eMTC, 3G/LTE, and IP65-rated features, making them highly suitable for outdoor applications. WISE-2000 sensor devices are all-in-one devices designed for specific applications, whereas WISE-6000 devices are ready-to-use M2M edge devices for machine status monitoring in the field of remote management.

To realize a complete IoT sensing solution, the WISE-4000 series goes beyond merely providing a wireless communication interface for sensors—it also provides cloud connectivity for additional user applications. With support for IoT protocols such as MQTT and RESTful API, the WISE-4000 series can communicate with cloud services or other web services via secure web sockets. The WISE-4000 series comes with pre-integrated APIs for major cloud service providers (e.g., Dropbox) and IoT cloud services (e.g., Azure IoT Hub) and provides support for both private cloud platforms (e.g., private file servers or databases) and ERP/MES systems.


Wireless Sensor and Sensing Devices

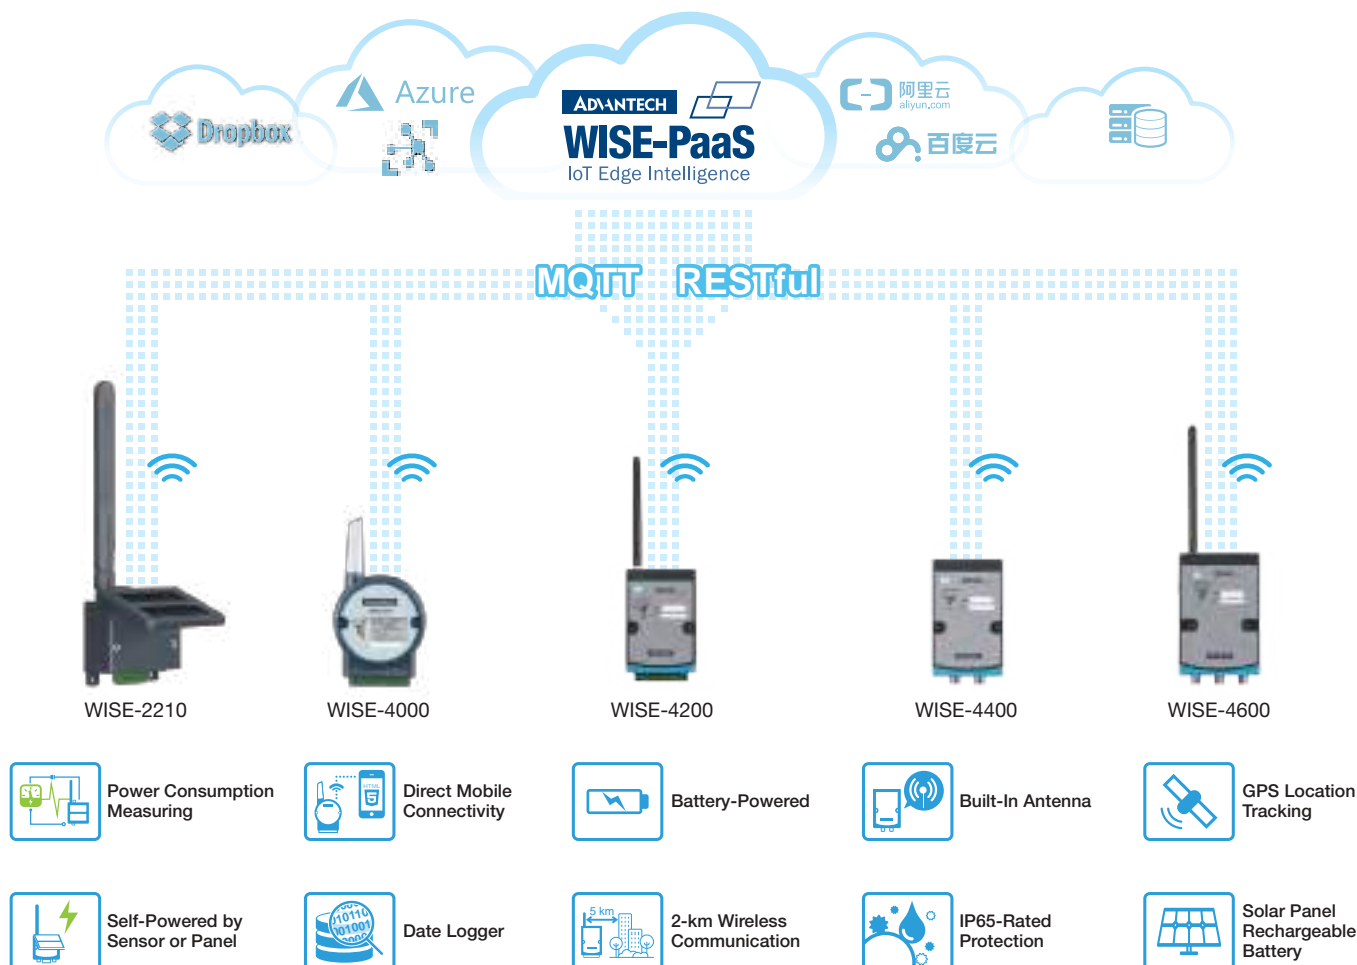

Wireless Communication


Wireless Technology

Advancements in IoT have led to the development of many wireless technologies that can be implemented in a range of hardware products. The WISE-4000 series utilizes Wi-Fi, 3G, and LPWAN to meet specific wireless communication requirements of virtually any project.

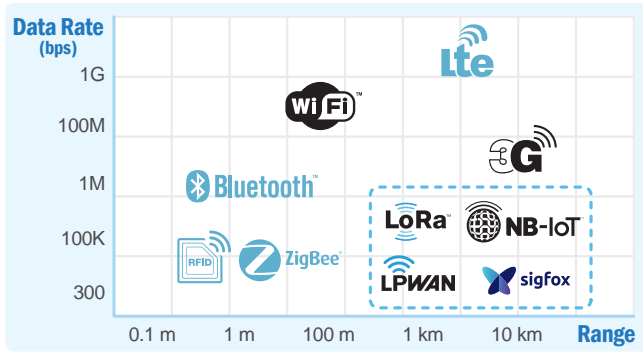

Low-Power Wide-Area Network (LPWAN, Sub-1 GHz)

LPWAN technology, including LoRa, SigFox, and NB-IoT, is suitable for applications requiring low-volume, long-range data transmission while maintaining a long battery life, minimal cost, and low levels of interference. The WISE-4000 series provides both standard LPWAN, eMTC/NB-IoT, and LoRa devices to meet different long-range sensing requirements. For the WISE-4210 and WISE-4610 end nodes, Advantech also provides LPWAN access points or LoRa gateways, enabling users to easily build up an LPWAN or LoRa network.



Wireless RFID Gateway and Edge Device



- 4-port UHF RFID read/write function
- Node-RED programmable for data read, write, filter, and transfer
- Application-ready function block
- Ethernet/Wi-Fi interface for uplink

- Supports more than 100 PLC drivers by WISE-PaaS/EdgeLink
- Built-in digital I/O, analog I/O, and RS-485 for machine status monitoring
- Wi-Fi, 3G, NB-IoT with mini PCIe communication
- Intelligent logic control with Node-RED
- ePaper for local visualization and web service support for remote management

IoT Wireless I/O Modules



| Model | | WISE-4012E | WISE-4012 | WISE-4050 | WISE-4060 | WISE-4051 |
|--------------------|--------------------------------|---|---|--|--|---|
| Description | | 6-ch IoT wireless I/O module for IoT developers | 4-ch universal input + 2-ch digital output IoT wireless I/O module | 4-ch digital input + 4-ch digital output IoT wireless I/O module | 4-ch digital input + 4-ch relay output IoT wireless I/O module | 8-ch digital input IoT wireless I/O module with 1 x RS-485 port |
| Wireless Interface | IEEE Standard | IEEE 802.11b/g/n | IEEE 802.11b/g/n | IEEE 802.11b/g/n | IEEE 802.11b/g/n | IEEE 802.11b/g/n |
| | Frequency Band | 2.4 GHz | 2.4 GHz | 2.4 GHz | 2.4 GHz | 2.4 GHz |
| | Outdoor Range | 110 m (L.O.S.) | 110 m (L.O.S.) | 110 m (L.O.S.) | 110 m (L.O.S.) | 110 m (L.O.S.) |
| | Network Mode | Infrastructure, Limited AP | Infrastructure, Limited AP | Infrastructure, Limited AP | Infrastructure, Limited AP | Infrastructure, Limited AP |
| | Security | WPA2 Personal and Enterprise | WPA2 Personal and Enterprise | WPA2 Personal and Enterprise | WPA2 Personal and Enterprise | WPA2 Personal and Enterprise |
| | Antenna Connector | Reverse SMA | Reverse SMA | Reverse SMA | Reverse SMA | Reverse SMA |
| Analog Input | Channel | 2-ch (differential) | 4-ch | - | - | - |
| | Input Type | V | V, A, Dry contact DI | - | - | - |
| | Voltage Range | 0 ~ 10 V | ±150 mV, ±500 mV, ±1 V, ±5 V, ±10 V, 0 ~ 150 mV, 0 ~ 500 mV, 0 ~ 1 V, 0 ~ 5 V, 0 ~ 10 V | - | - | - |
| | Current Range | - | 0 ~ 20, 4 ~ 20, ±20 mA | - | - | - |
| | Resolution | 12-bit | 16-bit | - | - | - |
| | Sampling Rate | 10 Hz (total) | 10 Hz (total) | - | - | - |
| | Accuracy | ±0.1 V _{DC} | Voltage: ±0.1% of FSR Current: ±0.2% of FSR | - | - | - |
| | Burnout Detection | - | ✓ (4 ~ 20 mA only) | - | - | - |
| | Isolation | - | 3,000 V _{rms} | - | - | - |
| | Channel | 2-ch dry contact | Shared with analog input | 4-ch dry contact or wet contact | 4-ch dry contact or wet contact | 8-ch dry contact or wet contact |
| Digital Input | Counter Input | 3 kHz | 2 Hz | 3 kHz | 3 kHz | 3 kHz |
| | Frequency Input | 0.1 ~ 3 kHz | 0.1 ~ 2 Hz | 0.1 ~ 3 kHz | 0.1 ~ 3 kHz | 0.1 ~ 3 kHz |
| | Isolation | - | 3,000 V _{rms} | 3,000 V _{rms} | 3,000 V _{rms} | 3,000 V _{rms} |
| | Channel | 2-ch relay | 2-ch (sink-type) | 4-ch (sink-type) | 4-ch power relay | - |
| Digital Output | Output Rating (Resistive Load) | 120 V _{AC} @ 0.5 A 30 V _{DC} @ 1 A | Open collector to 30 V _{DC} , 400 mA max. | | 250 V _{AC} @ 5 A 30 V _{DC} @ 3 A | - |
| | Pulse Output | 60 operations/min | 5 kHz | 5 kHz | 60 operations/min | - |
| | Isolation | 1,500 V _{rms} | 3,000 V _{rms} | 3,000 V _{rms} | 3,000 V _{AC} | - |
| | Port Number | - | - | - | - | 1 |
| Serial Port | Type | - | - | - | - | RS-485 |
| | Data Bits | - | - | - | - | 7, 8 |
| | Stop Bits | - | - | - | - | 1, 2 |
| | Parity | - | - | - | - | None, odd, even |
| General | LED Indicators | Status, communication, network mode, quality | Status, communication, network mode, quality | Status, communication, network mode, quality | Status, communication, network mode, quality | Status, communication, network mode, quality, serial Tx, Rx |
| | Real-Time Clock | ✓ | ✓ (with battery backup) | ✓ (with battery backup) | ✓ (with battery backup) | ✓ (with battery backup) |
| | Connectors | I/O: Terminal block Power: Micro-B USB | Plug-in screw terminal block (I/O and power) | Plug-in screw terminal block (I/O and power) | Plug-in screw terminal block (I/O and power) | Plug-in screw terminal block (I/O and power) |
| | Dimensions | 80 x 148 x 25 mm (W x H x D) | | | | |
| Environment | Operating Temperature | -25 ~ 70°C (-13 ~ 158°F) | | | | |
| | Storage Temperature | -40 ~ 85°C (-40 ~ 185°F) | | | | |
| | Operating Humidity | 20 ~ 95% RH (non-condensing) | | | | |
| | Storage Humidity | 0 ~ 95% RH (non-condensing) | | | | |
| Power | Input Range | Micro USB 5 V _{DC} | 10 ~ 30 V _{DC} | 10 ~ 30 V _{DC} | 10 ~ 30 V _{DC} | 10 ~ 30 V _{DC} |
| | Protection | - | Power reversal protection | Power reversal protection | Power reversal protection | Power reversal protection |
| | Power Consumption | 1.5 W @ 5 V _{DC} | 2.5 W @ 24 V _{DC} | 2.2 W @ 24 V _{DC} | 2.5 W @ 24 V _{DC} | 2.2 W @ 24 V _{DC} |

IoT Ethernet I/O Modules



| Model Name | | WISE-4010/LAN | WISE-4050/LAN | WISE-4060/LAN |
|-----------------------|-----------------|--|--|--|
| Description | | 4-ch current input + 4-ch digital output IoT Ethernet I/O module | 4-ch digital input + 4-ch digital output IoT Ethernet I/O module | 4-ch digital input + 4-ch relay output IoT Ethernet I/O module |
| Analog I/O | Channels | 4 | - | - |
| | Resolution | 12-bit | - | - |
| | Accuracy | ±0.2% of FSR | - | - |
| | Sampling Rate | 10/100 Hz per channel | - | - |
| | Current Input | 0 ~ 20, 4 ~ 20 mA | - | - |
| Digital I/O | Input Channels | - | 4 | 4 |
| | Output Channels | 4 | 4 | 4 (from a power relay) |
| | Counter Input | - | 3 kHz | 3 kHz |
| | Frequency Input | - | 3 kHz | 3 kHz |
| | Pulses Output | 1 kHz | 1 kHz | 1 kHz |
| Isolation Protection | | - | 3,000 V _{rms} | 3,000 V _{rms} |
| LED Indicators | | Status, Comm | | |
| Power Requirement | | 10 ~ 30 V _{DC} (24 V _{DC} Standard) | | |
| Power Consumption | | 1.2 W @ 24 V _{DC} | 2.2 W @ 24 V _{DC} | 2.5 W @ 24 V _{DC} |
| Operating Temperature | | -40 ~ 70°C (-40~158°F) | | |
| Storage Temperature | | -40 ~ 85°C (-40~185°F) | | |
| Operating Humidity | | 20 ~ 95% RH (non-condensing) | | |
| Storage Humidity | | 0 ~ 95% RH (non-condensing) | | |

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O & Wireless Sensing Modules

8

Industrial I/O and Video Solutions

IoT Wireless Sensor Nodes



| Wireless | | Wi-Fi | | | LoRa | |
|------------------------|-----------------|--|---|--|---------------------------------------|-----------------------------------|
| Model Name | | WISE-4220-S231 | WISE-4220-S214 | WISE-4220-S215 | WISE-4610-S672 | WISE-4610-S614 |
| Description | | Wireless IoT WSN with Temperature/Humidity Sensors | Wireless IoT WSN with 4-ch AI and 4-ch DI | Wireless IoT WSN with 4-ch RTD | LoRa WSN with 2 Serial Port & 6-ch DI | LoRa WSN with 4-ch AI and 4-ch DI |
| Wireless Interface | Function | Wireless Sensor Node | Wireless Sensor Node | Wireless Sensor Node | Wireless Sensor Node | Wireless Sensor Node |
| | IEEE Standard | IEEE 802.11b/g/n | | | IEEE 802.15.4g LoRa Modulation | |
| | Frequency Band | 2.4GHz | | | NA915, EU868, JP925, CN470 | |
| | Mode / Topology | Infrastructure, Limited AP | | | Star | |
| | Outdoor Range | 110m (L.O.S.) | | | 5000m (L.O.S.) | |
| Network | GNSS | - | | | GPS/GLONASS/BeiDou | |
| | Interface | WLAN | | | Micro-B USB | |
| | Protocol | Modbus/TCP, REST, MQTT, Azure | | | - | - |
| Analog / Sensor Input | Channel | Built-in Sensors | 4-ch | 4-ch | - | 4-ch |
| | Input Type | Temperature, Humidity | V, A | 2, 3-wire Pt RTD | - | V, A |
| | Input Range | -25 ~ 70°C 0 ~ 90% RH | 0~10V, 0~20mA, 4~20mA | Pt-100: -200~200°C Pt-1000: -40~160°C | - | 0~10V, 0~20mA, 4~20mA |
| Digital Input / Output | Channel | - | 4-ch Dry Contact DI | - | 6-ch Dry Contact DI | 4-ch Dry Contact DI |
| Serial Port | Port Number | - | - | - | 1-port RS-485 1-port RS-232/485 | - |
| Power Input | Battery Power | - | | | | Solar Rechargeable Battery |
| | External Power | 10 ~ 50 V _{DC} | | | | 10 ~ 50 V _{DC} |



| Wireless | | Cellular | | | | |
|------------------------|----------------|--|--------------------------|------------------------------------|---|---|
| Model Name | | WISE-4470-S250 | WISE-4470-S414 | WISE-4470-S472 | WISE-4670-S672 | WISE-4670-S614 |
| Description | | 3G WSN with 1-port RS-485 and DIO | IP65 3G WSN with 4-ch AI | IP65 3G WSN with 2 Serial Port | Outdoor 3G WSN with 2 Serial Port & 6-ch DI | Outdoor 3G WSN with 4-ch AI and 4-ch DI |
| Wireless Interface | Function | Wireless Sensor Node | Wireless Sensor Node | Wireless Sensor Node | Wireless Sensor Node | Wireless Sensor Node |
| | IEEE Standard | GSM/GPRS/HSPA | | | | GSM/GPRS/HSPA |
| | Frequency Band | UMTS/HSPA: 1/8 (900/2100MHz) GSM/GPRS/EDGE: 2/3/5/8(1900/1800/850/900MHz) | | | UMTS/HSPA: 1/8(2100/900MHz) GSM/GPRS/EDGE: 2/3/5/8(1900/1800/850/900MHz) | |
| | Outdoor Range | - | | | | - |
| | GNSS | - | | | | GPS/GLONASS/BeiDou |
| Network | Configuration | Micro-B USB | | | Micro-B USB | |
| | Protocol | REST, MQTT, Azure | | | REST, MQTT, Azure | |
| | Channel | - | 4-ch | - | - | 4-ch |
| Analog / Sensor Input | Input Type | - | V, A | - | - | V, A |
| | Input Range | - | 0~10V, 0~20mA, 4~20mA | - | - | 0~10V, 0~20mA, 4~20mA |
| Digital Input / Output | Channel | 6-ch Dry Contact DI 2-ch Sink-type DO | - | - | 6-ch Dry Contact DI | 4-ch Dry Contact DI |
| Serial Port | Port Number | 1-port RS-485 for Modbus/RTU | - | 1-port RS-485 1-port RS-232/485 | 1-port RS-485 1-port RS-232/485 | - |
| Power Input | Battery Power | - | | | | Solar Rechargeable Battery |
| | External Power | 10 ~ 50 V _{DC} | | | | 10 ~ 50 V _{DC} |



| Wireless | | LPWAN | | | | |
|------------------------|----------------|------------------------------------|--|--|------------------------------------|--|
| Model Name | | WISE-4210-AP | WISE-4210-S231 | WISE-4210-S251 | WISE-4210-S214 | WISE-4210-S215 |
| Description | | LPWAN Wireless to Ethernet AP | LPWAN WSN with Temperature/Humidity Sensors | LPWAN WSN with 1-port RS-485 and 6-ch DI | LPWAN WSN with 4-ch AI and 4-ch DI | LPWAN WSN with 4-ch RTD |
| Wireless Interface | Function | Wireless Access Point | Wireless Sensor Node | Wireless Sensor Node | Wireless Sensor Node | Wireless Sensor Node |
| | IEEE Standard | IEEE 802.15.4g FSK/GFSK Modulation | | | | |
| | Frequency Band | 433, 868, or 923 MHz | | | | |
| | Topology | Star | | | | |
| | Outdoor Range | 2000m (L.O.S.) | | | | |
| Network | Configuration | RJ-45 | | Micro-B USB | | |
| | Protocol | Modbus/TCP, REST, MQTT, Azure | - | - | - | - |
| Analog / Sensor Input | Channel | - | Built-in Sensors | - | 4-ch | 4-ch |
| | Input Type | - | Temperature, Humidity | - | V, A | 2, 3-wire Pt RTD |
| | Input Range | - | -25°C ~ 70°C 0 ~ 90% RH | - | 0~10V, 0~20mA, 4~20mA | Pt-100: -200~200°C Pt-1000: -40~160°C |
| Digital Input / Output | Channel | - | - | 6-ch Dry Contact DI | 4-ch Dry Contact DI | - |
| Serial Port | Port Number | - | - | 1-port RS-485 for Modbus/RTU | - | - |
| Power Input | Battery Power | - | 3 x AA, 3.6V V _{DC} Lithium Battery | | | |
| | External Power | 10 ~ 50 V _{DC} | 10 ~ 50 V _{DC} | | | |



| Wireless | | eMTC / NB-IoT | | | | LPWAN |
|------------------------|----------------|--|--|--|--|-------------------------|
| Model Name | | WISE-4471-S250 | WISE-4471-S214 | WISE-4671-S672 | WISE-4671-S614 | PCM-24S1S1 |
| Description | | eMTC/NB-IoT WSN with 1-port RS-485 and DIO | eMTC/NB-IoT WSN with 4-ch AI and 4-ch DI | Outdoor eMTC/NB-IoT WSN with 2 Serial Port | Outdoor eMTC/NB-IoT WSN with 4-AI & 4-DI | LPWAN Wireless iDoor AP |
| Wireless Interface | Function | Wireless Sensor Node | Wireless Sensor Node | Wireless Sensor Node | Wireless Sensor Node | Wireless Access Point |
| | IEEE Standard | R13 LTE Cat M1 / NB1 | | | | IEEE 802.15.4g |
| | Frequency Band | 2, 3, 4, 5, 8, 12, 13, 20, 28 | | | | 433, 868, or 923 MHz |
| | Topology | - | | | | Star |
| | Outdoor Range | - | | | | 2000m (L.O.S.) |
| Network | GPS | - | | | | - |
| | Interface | Micro-B USB | Micro-B USB | Micro-B USB | Micro-B USB | mPCIe |
| Network | Protocol | UDP, CoAP, REST, MQTT | UDP, CoAP, REST, MQTT | UDP, CoAP, REST, MQTT | UDP, CoAP, REST, MQTT | Modbus/TCP, REST, MQTT |
| | Channel | - | 4-ch | - | 4-ch | - |
| Analog / Sensor Input | Input Type | - | V, A | - | V, A | - |
| | Input Range | - | 0~10V, 0~20mA, 4~20mA | - | 0~10V, 0~20mA, 4~20mA | - |
| Digital Input / Output | Channel | 6-ch Dry Contact DI 2-ch Sink-type DO | 4-ch Dry Contact DI | 6-ch Dry Contact DI | 4-ch Dry Contact DI | - |
| Serial Port | Port Number | 1-port RS-485 for Modbus/RTU | - | 1-port RS-485 1-port RS-232/485 | - | - |
| Power Input | Battery Power | - | | | | - |
| | External Power | Solar Rechargeable Battery | | | | - |
| | | 10 ~ 50 V _{DC} | | | | - |

IoT Wireless Sensor Devices

Preliminary



Preliminary



| Model Name | | WISE-2210 | WISE-2834 |
|--------------------|--------------------------------|---|--|
| Description | | 3-ch CT input self-powered wireless sensor node | 4-ch digital I/O Ethernet/Wi-Fi intelligent RFID gateway |
| Wireless Interface | Function | Wireless sensor device | RFID sensor |
| | Communication Standard | IEEE 802.15.4g | IEEE 802.15.4g and EPC Global Class 1 Gen 2 |
| | Frequency Band | 868, 923 MHz | 860 ~ 928 MHz |
| | Outdoor Range | 1000m (L.O.S.) | 10m (L.O.S.) |
| | Topology | Star | - |
| | Security | WPA2 Personal and Enterprise of AP | WPA2 Personal and Enterprise |
| | Antenna Connector | Reverse SMA | RFID: Reverse TNC Wi-Fi: Reverse SMA |
| CT Input | Channel | 3-ch | - |
| | Input Type | V | - |
| | Voltage Range | 1 ~ 5 V | - |
| | Current Range | 200 mA (max.) | - |
| | Resolution | 12-bit | - |
| | Sampling Rate | 10 Hz (total) | - |
| | Accuracy | Voltage: $\pm 1\%$ of FSR | - |
| Digital Input | Channel | - | 2-ch dry contact 2-ch wet contact |
| | Counter Input | - | 3 kHz |
| | Frequency Input | - | 0.1 ~ 3 kHz |
| | Isolation | - | 2,000 V _{rms} |
| Digital Output | Channel | - | 4-ch (sink-type) |
| | Output Rating (Resistive Load) | - | Open collector to 50 V, 400 mA max. |
| | Pulse Output | - | 5 kHz |
| | Isolation | - | 2,000 V _{rms} |
| Serial Port | Port Number | - | 1 |
| | Type | - | RS-485 |
| General | LED Indicators | COM, USB | Status, communication, network mode, signal quality |
| | Real-Time Clock | - | ✓ |
| | Connectors | I/O: Plug-in screw terminal block Power: Micro USB | Terminal block (I/O and RS485) |
| | Dimensions | 71 x 72.7 x 29.8 mm (W x H x D) | 190 x 120 x 30.2 mm (W x H x D) |
| Environment | Operating Temperature | -25 ~ 70°C (-13 ~ 158°F) | -25 ~ 70°C (-13 ~ 158°F) |
| | Storage Temperature | -40 ~ 85°C (-40 ~ 185°F) | -40 ~ 85°C (-40 ~ 185°F) |
| | Operating Humidity | 20 ~ 95% RH (non-condensing) | 20 ~ 95% RH (non-condensing) |
| | Storage Humidity | 0 ~ 95% RH (non-condensing) | 0 ~ 95% RH (non-condensing) |
| Power | Input Range | Micro USB: 5 V _{DC} CT: 1 ~ 5 V _{DC} | 10 ~ 30 V _{DC} |
| | Protection | - | Power reversal protection |
| | Power Consumption | 0.1 mW @ 3.3 V _{DC} | 5 W @ 24 V _{DC} |

ADAM-6000 and ADAM-6200 Series

Intelligent Ethernet I/O Modules

Transition and Vision for Remote DAQ Devices

IT and network infrastructure have become established technologies. In the future, there will be many potentially key elements such as artificial intelligence, energy-efficiency, cloud computing, cyber-security, and mobile communication technologies being progressively leveraged in automation markets. We believe that these will also contribute to ideal remote data acquisition devices in IoT world.

To fulfill the transition requirements and future applications, Advantech has developed the ADAM-6000/6200 series of Ethernet I/O modules, comprising analog I/O, digital I/O, and relay modules. ADAM-6000/6200 series modules possess a multitude of advanced features that can cope with changes in hardware design and user expectations regarding useful software functions for applications in the field. With a new design and strong capabilities, ADAM-6000/6200 series modules can provide a well-integrated I/O solution for Ethernet control systems.



Major Functionality Comparison

| | | ADAM-6000 | ADAM-6200 |
|------------------------------|------------|-----------|-----------|
| Daisy-chain with auto-bypass | | - | ✓ |
| GCL | | ✓ | ✓ |
| Peer-to-peer | | ✓ | ✓ |
| Web server (HTML5) | | ✓ | ✓ |
| Configuration backup | | ✓ | ✓ |
| Access control | | ✓ | ✓ |
| Protocol Support | Modbus/TCP | ✓ | ✓ |
| | MQTT | ✓ | ✓ |
| | SNMP | ✓ | ✓ |
| | RESTful | ✓ | ✓ |

Flexible Deployment with Daisy Chain Networking and Auto-Bypass Protection

ADAM-6200 modules have built-in Ethernet switches to allow daisy chain connections in an Ethernet network, making it easier to deploy, saving on wiring costs, and helping to improve scalability. The two Ethernet ports are fully compliant with IEEE 802.3u 10/100 Mbps via standard RJ-45 connectors.

Although the daisy chain topology brings cost-saving benefits for users, it still comes with the risk that once any device in the chain suffers a power outage, it will cause the disconnection of all devices data stream.

Auto-Bypass Protection

To prevent this critical issue from happening, Advantech has refined the hardware design of ADAM-6200 modules so that they can rapidly recover the network connection within approximately 2.5 s, thereby greatly minimizing any potential damage.



Remote Monitoring and Control with Smart Portable Devices

At the early stage of automation, it was difficult to access or obtain online equipment data when conducting on-site inspections. Mostly, the only possible way to do this was by communicating with engineers on the factory floor or in a central control room where the SCADA program was running. With these factors considered, on-site inspections and debugging were invariably arduous tasks that took considerable effort to complete.

Overcoming this, the ADAM-6200 series of modules integrates HTML5, allowing users to remotely monitor the status of all online modules without bridging a SCADA system. These modules also allow users to perform basic I/O configuration on any built-in HMI device such as a smartphone or digital pad via the Internet. Moreover, users can further develop extended applications based on the default HTML5 file embedded in the module.

With its enhanced syntax structure and integration of rich web technologies such as CSS and JavaScript, the now widely used markup language HTML5 has enhanced the design of web content. This is particularly beneficial for ADAM module users because it allows them to implement more web services and APIs and to develop more interactive applications for configuring and monitoring their hardware.



1
Software and Industry
Solutions

2
Industrial Server

3
Intelligent System

4
Intelligent HMI and
Monitors

5
Automation Computers
and Controllers

6
Industrial
Communication


7
Remote I/O & Wireless
Sensing Modules

8
Industrial I/O and
Video Solutions

ADAM-6000 GCL is the Simplest Logic Ethernet I/O


What is GCL?

Graphic Condition Logic (GCL) gives controllability to Ethernet I/O modules. Users can define control logic rules using the graphic configuration environment in ADAM series modules and download defined logic rules to ADAM-6000/6200 Ethernet I/O modules. The modules will then execute the logic rules automatically, just like a standalone controller. For each Ethernet I/O module, 16 logic rules can be defined. In the configuration environment of Adasm/Apax .NET Utility, four graphic icons show the four stages of one logic rule, referring to the input, logic, execution, and output stages (refer to the image below). Users can simply click on each icon and a dialog window will appear to configure each stage. After completing all configurations, users can simply click a button to download the defined logic rules to their module.

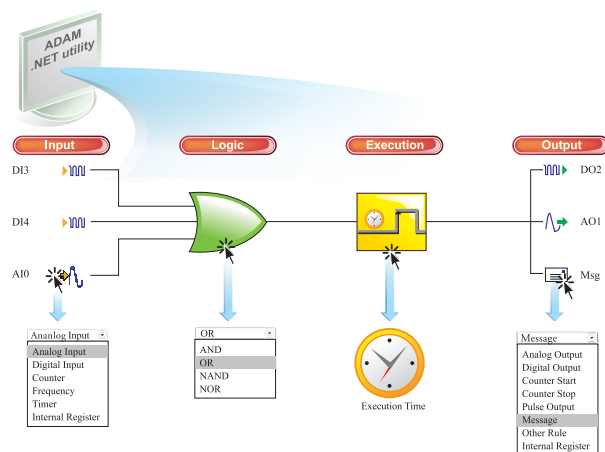

Supports Both Local and Remote Output

When users define the destination of the output stage (e.g., digital output, analog output, counter, and pulse output), the target module can be set as either the local module or another remote module, thus giving the ability to develop complex logic rules.

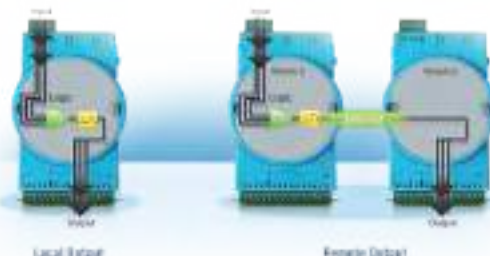

Fast Execution Time

Advantech GCL features the shortest logic rule execution time on the market. When a local output is selected (i.e., the input and output channels are on the same module), the processing time (including an hardware input delay time, logic rule, execution time, and hardware output delay time) is <1 ms. When a remote output is selected (i.e., the input and output channels are on different modules), the total processing time (including processing and communication time) is <3 ms.

Sending Messages

In GCL, you can define customized message. When the specified conditions are met, the message, module IP, and I/O status will be sent to the PC or device you define.

What Benefits Do Peer-to-Peer Modules Provide?

What is Peer-to-Peer?

Unlike client /server mode, peer-to-peer mode enabled modules to actively update their input channel status to a specific output channel. For this, a pair of modules is used: one input module and one output module. Users can define the mapping between them and the input value of one module will be transferred to the output channel of the other module.

No Controller Required

For Ethernet I/O modules without peer-to-peer functionality, a controller is needed to read data from the input module and then send the data to the output module. With peer-to-peer solutions, the controller can be removed since data will be automatically transferred. This not only simplifies the process but also helps save on system hardware costs.

No Programming Required

To utilize peer-to-peer modules, the only thing required is to configure the settings using Adam/Apax .NET Utility. Because no additional programming effort is needed, this greatly reduces system development time.

Fast Response Time


Advantech peer-to-peer modules offer the best execution times on the market; specifically, the execution time to transfer data from input to output is <1.2 ms.

Advanced Security

When peer-to-peer modules are employed, it is critical that they not be controlled by unauthorized computers or devices. ADAM-6000 series peer-to-peer modules allow users to decide which IP or MAC address has control authority. This can make ensure that output modules are controlled only by their paired input modules.


Simple and Flexible System Wiring

Long-distance wiring can introduce difficulties into any project. For some automation applications, if the PLC and the sensors are far away, a remote I/O module needs to be located near the sensors and a proprietary communication network needs to connect the PLC and the remote I/O module. However, with this setup, communication will be severely limited. Moreover, networks provided by PLC manufacturers are rarely open networks. Peer-to-peer modules can replace limited and closed networks with no limitations since they leverage the most open and flexible Ethernet networks.

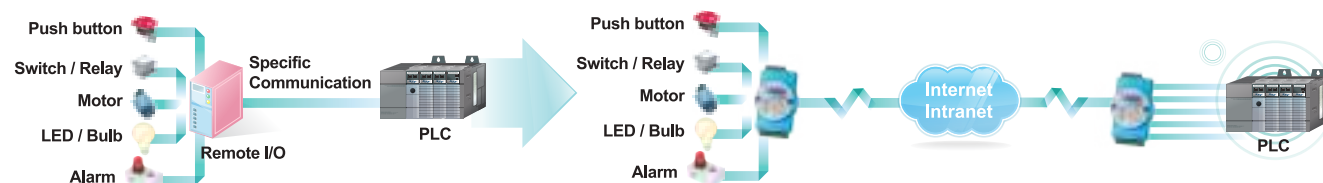

ADAM-6100 Series

EtherNet/IP and Profinet I/O Modules

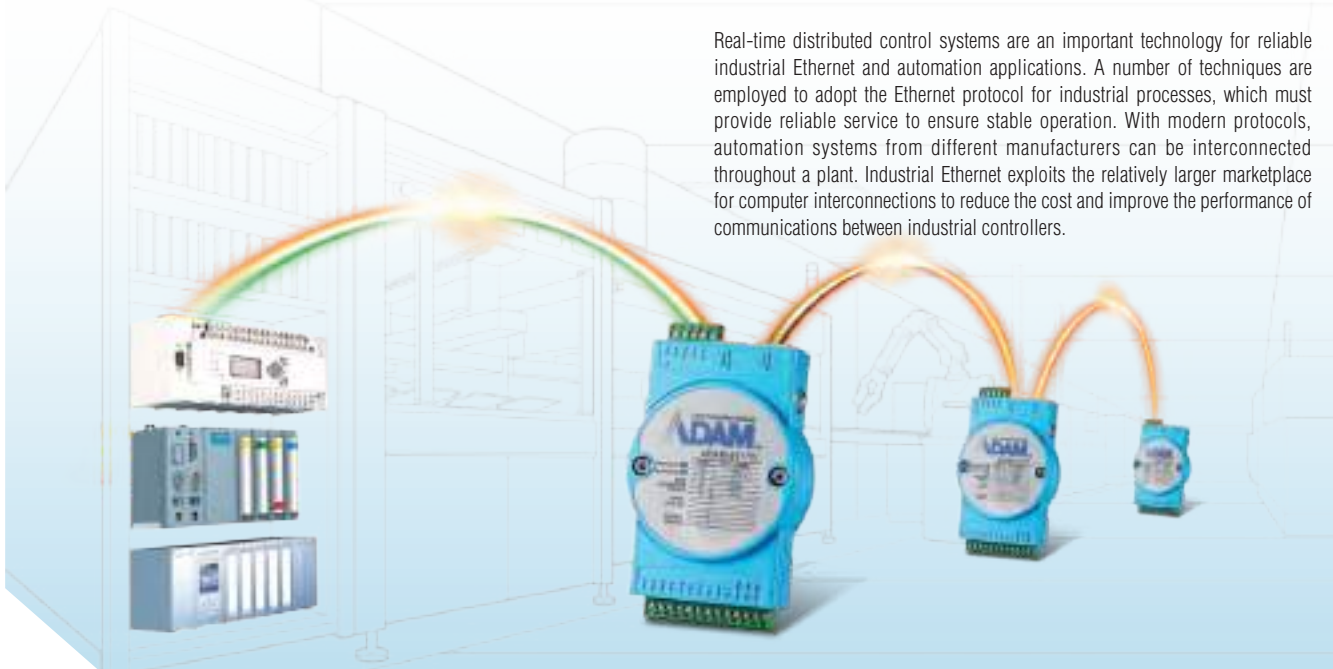

Real-time distributed control systems are an important technology for reliable industrial Ethernet and automation applications. A number of techniques are employed to adopt the Ethernet protocol for industrial processes, which must provide reliable service to ensure stable operation. With modern protocols, automation systems from different manufacturers can be interconnected throughout a plant. Industrial Ethernet exploits the relatively larger marketplace for computer interconnections to reduce the cost and improve the performance of communications between industrial controllers.

Real-Time Systems

A real-time system is one in which the correctness of a result depends not only on precise calculations but also on accurate timing. In computing, "real time" refers to a time frame that is very brief, to the point that it is virtually instantaneous. When a computer processes data in real time, it reads and handles data as it is received, producing results without any delay. A non-real-time computer process does not have a deadline. Such processes can be considered non-real-time—even if fast results are the preferred outcome. A real-time system, on the other hand, is expected to respond not just quickly, but also within a predictable period of time. In automation control systems, real-time technology provides multiple advantages, such as improved safety, quality, and efficiency. To build a real-time distributed control system, it is critical to establish reliable real-time communication among the controllers; accordingly, there is now increasing interest in the use of Ethernet protocols as the link-layer protocol, such as EtherNet/IP, PROFINET, EtherCAT, Ethernet PowerLink, SERCOS III.

EtherNet/IP

EtherNet/IP was developed in the late 1990s by Rockwell Automation for use in process control and other industrial automation applications, ensuring multi-vendor system interoperability. EtherNet/IP is a lot like standard office Ethernet, using the same TCP/IP messaging but with a new application layer added where data are arranged. This is known as object-orientated organization, which allows ordinary office Ethernet to become a markedly more versatile system. Today, EtherNet/IP is commonly used in industrial automation applications such as water processing, manufacturing, and utilities.

Profinet

PROFINET, the standard for industrial networking in automation, connects devices, systems, and cells to facilitate manufacturing that is faster, safer, less costly, and of higher quality. As it is fully compatible with office Ethernet, it can be easily integrated with existing systems and equipment while bringing enhanced features such as real-time performance and control as well as monitoring functions. Additionally, PROFINET features highly scalable architectures, remote access and maintenance of field devices over the network, and lower production/quality data monitoring costs.

Feature Highlights

Daisy Chain Connections

ADAM-6100 modules have two built-in Ethernet switches to allow daisy chain connections in an Ethernet network, making it easier to deploy while improving scalability and resistance against interference commonly found in factory settings.



Ethernet-Based Configuration Tool

Adam/Apax .NET Utility comes bundled with each ADAM-6100 module. With this utility, users can configure, set, and test ADAM-6100 modules via Ethernet.



2,500 V_{DC} Isolation Protection

With triple isolation, including power supply, I/O, and Ethernet communication, ADAM-6100 series modules ensure that I/O data are controlled correctly while preventing devices from breaking down.

Multiple Mounting Options

Advantech provides various mounting methods to fit the varying needs of different projects in the field. ADAM-6100 series modules support DIN rail mounting, wall mounting, and piggybacking.



- 1 Software and Industry Solutions
- 2 Industrial Server
- 3 Intelligent System
- 4 Intelligent HMI and Monitors
- 5 Automation Computers and Controllers
- 6 Industrial Communication
- 7 Remote I/O & Wireless Sensing Modules
- 8 Industrial I/O and Video Solutions

ADAM-6000 Series Selection Guide



| Spec. | | Model | ADAM-6015 | ADAM-6017 | ADAM-6018 | ADAM-6022 | ADAM-6024 |
|---------------------------|-------------------------|-------|-----------------------|---|----------------------------------|---|---|
| Interface | | | 10/100 Mbps Ethernet | | | | |
| Peer-to-Peer ¹ | | | | ✓ | | - | Receiver Only ² |
| GCL ¹ | | | | ✓ | | - | Receiver Only ² |
| Resolution | | | | 16 bit | | 16-bit for analog inputs 12-bit for analog outputs | 16-bit for analog inputs 12-bit for analog outputs |
| Analog Input | Channels | | 7 | 8 | 8 | 6 | 6 |
| | Sampling Rate | | 10 Hz | | | | |
| | Voltage Input | | - | ±150 mV, ±500 mV, ±1 V, ±5 V, ±10 V, 0 ~ 150 mV, 0 ~ 500 mV, 0 ~ 1 V, 0 ~ 5 V, 0 ~ 10 V | - | ±10 V | ±10 V |
| | Current Input | | - | 0 ~ 20, 4 ~ 20, ±20 mA | - | 0 ~ 20, 4 ~ 20 mA | 0 ~ 20, 4 ~ 20 mA |
| | Direct Sensor Input | | Pt, Balco, and Ni RTD | - | J, K, T, E, R, S, B thermocouple | - | - |
| | Burnout Detection | | ✓ | ✓ (4 ~ 20mA only) | ✓ | - | - |
| | Math. Functions | | Max. Min. Avg. | Max. Min. Avg. | Max. Min. Avg. | - | - |
| Analog Output | Channels | | - | - | - | 2 | 2 |
| | Current Output | | - | - | - | 0 ~ 20, 4 ~ 20 mA @ 15 V _{DC} | 0 ~ 20, 4 ~ 20 mA @ 15 V _{DC} |
| | Voltage Output | | - | - | - | 0 ~ 10 V _{DC} @ 30 mA | 0 ~ 10 V _{DC} @ 30 mA |
| Digital I/O | Input Channels | | - | - | - | 2 | 2 |
| | Output Channels | | - | 2 (sink) | 8 (sink) | 2 (sink) | 2 (sink) |
| | Extra Counter Channels | | - | - | - | - | - |
| | Counter Input | | - | - | - | - | - |
| | Frequency Input | | - | - | - | - | - |
| | Pulse Output | | - | - | - | - | - |
| | High/Low Alarm Settings | | ✓ | ✓ | ✓ | - | - |
| Isolation Protection | | | 2,000 V _{DC} | | | 2,000 V _{DC} ³ | 2,000 V _{DC} ³ |
| Remark | | | - | - | - | Built-in dual loop PID control algorithm | - |



| Spec. | | Model | ADAM-6050 | ADAM-6051 | ADAM-6052 | ADAM-6060 | ADAM-6066 |
|---------------------------|-------------------------|-------|-----------------------|-----------|------------|------------|------------------|
| Interface | | | 10/100 Mbps Ethernet | | | | |
| Peer-to-Peer ¹ | | | ✓ | ✓ | ✓ | ✓ | ✓ |
| GCL ¹ | | | ✓ | ✓ | ✓ | ✓ | ✓ |
| Digital I/O | Input Channels | | 12 | 12 | 8 | 6 | 6 |
| | Output Channels | | 6 (sink) | 2 (sink) | 8 (source) | 6-ch relay | 6-ch power relay |
| | Extra Counter Channels | | - | 2 | - | - | - |
| | Counter Input | | 3 kHz | 4.5 kHz | 3 kHz | 3 kHz | 3 kHz |
| | Frequency Input | | 3 kHz | 4.5 kHz | 3 kHz | 3 kHz | 3 kHz |
| | Pulse Output | | ✓ | ✓ | ✓ | ✓ | ✓ |
| | High/Low Alarm Settings | | - | - | - | - | - |
| Isolation Protection | | | 2,000 V _{DC} | | | | |

ADAM-6200 Series Selection Guide



| Model | | ADAM-6217 | ADAM-6224 | ADAM-6250 | ADAM-6251 | ADAM-6256 | ADAM-6260 | ADAM-6266 |
|---------------------------|---------------------|--|-----------------------------|--|-------------------|--------------------|---|------------------------------|
| Interface | | 10/100Mbps Ethernet | | | | | | |
| Peer-to-Peer ¹ | | ✓ | Receiver Only ² | ✓ | ✓ | ✓ | ✓ | ✓ |
| GCL ¹ | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Analog Input | Channels | 8 | - | - | - | - | - | - |
| | Input Impedance | >10MΩ (voltage) 120Ω (current) | - | - | - | - | - | - |
| | Voltage Input | ±150 mV, ±500 mV, ±1 V, ±5 V, ±10 V | - | - | - | - | - | - |
| | Current Input | 0 ~ 20, 4 ~ 20, ±20 mA | - | - | - | - | - | - |
| | Sampling Rate | 10 Hz | - | - | - | - | - | - |
| | Direct Sensor Input | - | - | - | - | - | - | - |
| | Burnout Detection | ✓ (4 ~ 20 mA) | - | - | - | - | - | - |
| | Resolution | 16-bit | - | - | - | - | - | - |
| | Accuracy | ±0.1% of FSR (voltage) @ 25°C ±0.2% of FSR (current) @ 25°C | - | - | - | - | - | - |
| Analog Output | Channels | - | 4 | - | - | - | - | - |
| | Voltage Output | - | 0 ~ 5, 0 ~ 10, ±5, ±10 V | - | - | - | - | - |
| | Current Output | - | 0 ~ 20, 4 ~ 20 mA | - | - | - | - | - |
| | Resolution | - | 12-bit | - | - | - | - | - |
| Digital I/O | Input Channels | - | 4 (dry contact only) | 8 | 16 | - | - | 4 |
| | Output Channels | - | - | 7 (sink) | - | 16 (sink) | - | - |
| | Relay Output | - | - | - | - | - | 6 (5 Form C + 1 Form A) | 4 (Form C) |
| | Contact Rating | - | - | - | - | - | 250 V _{AC} @ 5A 30 V _{DC} @ 5A | |
| | Counter Input | - | - | 3 kHz | 3 kHz | - | - | 3 kHz |
| | Frequency Input | - | - | 3 kHz | 3 kHz | - | - | 3 kHz |
| | Pulse Output | - | - | 5 kHz | - | 5 kHz | 5 kHz | 5 kHz |
| | LED Indicator | - | - | 8 digital outputs, 7 digital inputs | 16 digital inputs | 16 digital outputs | 6 relay | 4 digital inputs, 4 relay |
| Power Consumption | | 3.5 W | 6 W | 3 W | 2.7 W | 3.2 W | 4.5 W | 4.2 W |
| Isolation Voltage | | 2,500 V _{DC} | | | | | | |
| Watchdog Timer | | System (1.6 s) Communication (programmable) | | | | | | |
| Communication Protocol | | Modbus TCP, TCP/IP, UDP, HTTP, DHCP, MQTT, SNMP | | | | | | |
| Power Requirements | | 10 ~ 30 V _{DC} (24 V _{DC} standard) | | | | | | |
| Operating Temperature | | -10 ~ 70°C (14 ~ 158°F) | | | | | | |
| Storage Temperature | | -20 ~ 80°C (-4 ~ 176°F) | | | | | | |
| Operating Humidity | | 20 ~ 95% RH (non-condensing) | | | | | | |
| Storage Humidity | | 0 ~ 95% RH (non-condensing) | | | | | | |

Note 1: Peer-to-peer and GCL cannot be run simultaneously; only one feature can be enabled at a time.

Note 2: The ADAM-6224 can only act as a receiver and generate analog output when peer-to-peer or GCL mode is used.

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O & Wireless Sensing Modules

8

Industrial I/O and Video Solutions

ADAM-6100 Series Selection Guide



| Model | | ADAM-6117 | ADAM-6150 | ADAM-6151 | ADAM-6156 | ADAM-6160 |
|----------------------|---------------------|---|-----------------------|-----------------------|-----------------------|-----------------------|
| Interface | | 10/100 Mbps Ethernet | | | | |
| Support Protocol | | ADAM-6100EI: EtherNet/IP ADAM-6100PN: Profinet | | | | |
| Analog Input | Resolution | 16-bit | - | - | - | - |
| | Channels | 8 | - | - | - | - |
| | Sampling Rate | 10 Hz | - | - | - | - |
| | Voltage Input | ±150 mV ±500 mV ±1 V ±5 V ±10 V | - | - | - | - |
| | Current Input | 0 ~ 20, 4 ~ 20, ±20 mA | - | - | - | - |
| | Direct Sensor Input | - | - | - | - | - |
| Analog Output | Resolution | - | - | - | - | - |
| | Channels | - | - | - | - | - |
| | Current Output | - | - | - | - | - |
| | Voltage Output | - | - | - | - | - |
| Digital I/O | Input Channels | - | 8 | 16 | - | - |
| | Output Channels | - | 7 | - | 16 | 6-ch power relay |
| Isolation Protection | | 2,500 V _{DC} | 2,500 V _{DC} | 2,500 V _{DC} | 2,500 V _{DC} | 2,500 V _{DC} |
| Connectors | | 2 x RJ-45 LAN (daisy chain) Plug-in screw terminal block (I/O and power) | | | | |

ADAM-4000 Series

Introduction

ADAM-4000 series modules are compact, versatile sensor-to-computer interface units designed specifically for reliable operation in harsh environments. Their built-in microprocessors are encased in rugged industrial grade plastic and independently provide intelligent signal conditioning, analog I/O, digital I/O, data display, and RS-485 communication. The ADAM-4000 series can be categorized into three groups: controllers, communication modules, and I/O modules.



Applications

- Remote data acquisition
- Process monitoring
- Industrial process control
- Energy management
- Supervisory control
- Security systems
- Laboratory automation
- Building automation
- Product testing
- Direct digital control
- Relay control

General Features

Modbus Communication Protocol

Since Modbus is one of the most widely used communication standards in the world, Advantech has applied it as the major communication protocol for eAutomation product development. The new generation of ADAM-4000 modules now also supports Modbus/RTU as the remote data transmission protocol. Featuring Modbus-support capacity, the new ADAM-4000 series have become universal remote I/O modules that can operate with any Modbus system. HMI servers or controllers can read/write data via standard Modbus commands instead of complex ASCII code.

Watchdog Timer

A watchdog timer supervisory function will automatically reset the ADAM-4000 series modules if required, which reduces the need for maintenance. It also contributes a high level of reliability to the system.

Modular Industrial Design

You can easily mount modules on a DIN rail, panel, or piggyback them on top of each other. Signal connections can be formed through plug-in screw-terminal blocks, ensuring simple installation, modification, and maintenance.

I/O Module Features

Easy Plug-In System Integration

With the ADAM-4000's Modbus I/O and built-in Modbus/RTU protocol, any controller using the Modbus/RTU standard can be integrated as part of an ADAM-4000 control system. Any Modbus Ethernet data gateway can upgrade these I/O modules up to the Modbus/TCP Ethernet layer. Most HMI software is bundled with a Modbus driver and can access the ADAM-4000 I/O directly. Moreover, Advantech provides Modbus OPC Server and Modbus/TCP OPC Server as data exchange interfaces between the ADAM-4000 Modbus I/O and any Windows applications.

Communication Module Features

Fiber Converter

The ADAM-4541 and ADAM-4542+ have been designed specifically for transmitting data over long distances without noise interference. The ADAM-4541 is a multi-mode converter that carries signals from fiber optics to RS-232/422/485. It offers a transmission distance of up to 2,500 m with total immunity against electromagnetic noise. The ADAM-4542+ is a single-mode converter that carries signals from fiber optics to RS-232/422/485. It offers an incredible transmission distance of up to 15 km, also with total immunity against electromagnetic noise.

USB Converter

The ADAM-4561 and ADAM-4562 are one-port isolated USB to RS-232/422/485 converters. The ADAM-4561 can convert USB to RS-232/422/485 with a plug-in terminal, and its major features are the capability to use 9-wire RS-232 and to draw power from a USB port. With 9-wire RS-232 capability, this converter meets the requirements of PLCs, modems, and controller equipment. The ADAM-4562 is a USB-to-serial converter that supports Plug & Play and hot-swapping, which simplifies the configuration process while allowing the module to draw power via USB, thus making it no longer necessary to have an external power supply.

ADAM-4100 Series

Robust Remote Data Acquisition and Control Modules Overview



Applications

- Wide operating temperature: -40 ~ 85°C
- Higher Noise Immunity
ESD (IEC 61000-4-2) 8KV
EFT (IEC 61000-4-4) 4KV
Surge (IEC 61000-4-5) 4KV
- Wide power input: 10 ~ 48 V_{DC}
- Support modbus/RTU
- Multiple interface :RS-485, Micro USB

Introduction

The robust ADAM-4000 family includes ADAM-4100 series modules, the ADAM-4510I, and the ADAM-4520I modules. The ADAM-4100 series comprises compact, versatile sensor-to-computer interface units designed for reliable operation in harsh environments. Their built-in microprocessors, encased in rugged industrial-grade PC plastic, independently provide intelligent signal conditioning, analog I/O, digital I/O, LED data display, and an address mode with a user-friendly design for convenient address reading. The ADAM-4510I and ADAM-4520I modules are robust industrial-grade communication modules.

Designed for Harsh Industrial Environments

ADAM-4100 Module with LED Display


ADAM-4100 series modules have an LED display that lets you monitor the channel status. For the ADAM-4117 and ADAM-4118, the LED will be lit when the related channel is active; for the ADAM-4150 and ADAM-4168, the LED will be lit when the related channel value is high. ADAM-4100 series modules have two operating modes: initial and normal. In contrast to old modules that require additional wiring to set the mode, this can be done using a switch with ADAM-4100 modules, making it very convenient to configure. When set to initial mode, the LED display represents the node address of the module. Additionally, in systems where multiple ADAM-4100 series modules are used, you can locate individual modules using Adam/Apax .NET Utility and the LED display on the module. All of these functions are very helpful for diagnosing ADAM-4100 series systems.

Online Firmware Updates

ADAM-4100 series modules have a user-friendly and convenient design that allows for firmware updates via a local network or the Internet. You can easily update to the latest firmware using Adam/Apax .NET Utility on the host PC. This saves time and ensures that the module always runs with the latest functional enhancements.


Micro USB interface

USB has become common interface in IoT devices, and it is easy to be accessed via PC. To expand the accessibility of ADAM-4100 series modules, in addition to an RS-485 serial port, the B version of these modules also has a micro USB interface that supplies power and a communication interface. Users have the option to use the RS-485 and USB ports concurrently or independently, depending on their application. The ADAM-4100 micro USB interface can be adapted to standard micro USB cable. Advantech also offers a 90° cable (optional) with a locking screw mechanism to further enhance the connection stability.

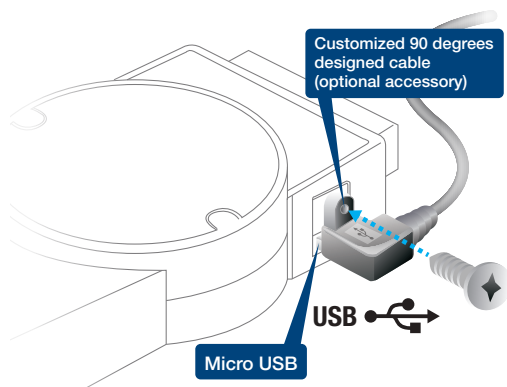

Access ADAM by Passive RFID

There is a trend in current IoT applications where increasingly more data are needed. Consequently, the demand for I/O modules is increasing. Users are pursuing efficient ways to set up and manage the modules. Thus, how to deploy I/O modules quickly and trace related usage information to avoid downtime have become key requirements in IoT applications. To fulfill these needs, ADAM-4100 series modules (B version) implement a passive internal RFID tag. This remarkable feature means that module information such as the model name, device ID, I/O value, firmware version, alarm events, and serial number are stored in the RFID tag. In contrast to typical RFID tags that contain fixed data, the RFID tag information in ADAM modules can be dynamically updated, which means that the RFID tag will reflect the latest ADAM module information. This innovative design makes ADAM modules more flexible for IoT applications.

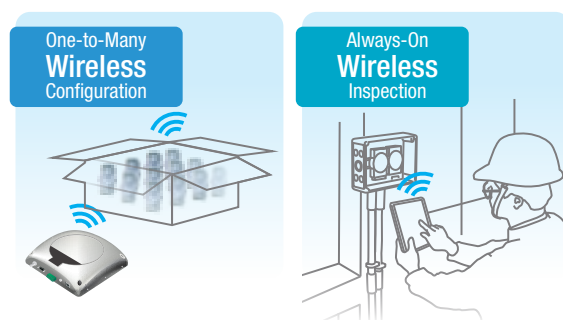

I/O Module Selection Guide

Analog Input



| Model | | ADAM-4015 | ADAM-4017+ | ADAM-4018+ | ADAM-4019+ |
|-------------------|-----------------------------------|-----------------------|---|----------------------------------|---|
| Resolution | | | | 16 bit | |
| Analog Input | Channels | 6 differential | 8 differential | 8 differential | 8 differential |
| | Sampling Rate | 10 Hz | | 10 Hz | 10 Hz |
| | Voltage Input | - | ±150 mV ±500 mV ±1 V ±5 V ±10 V | - | ±100 mV ±500 mV ±1 V ±2.5 V ±5 V ±10 V |
| | Current Input | - | 4 ~ 20, ±20 mA | 4 ~ 20, ±20 mA | 4 ~ 20, ±20 mA |
| | Direct Sensor Input | RTD | - | J, K, T, E, R, S, B thermocouple | J, K, T, E, R, S, B thermocouple |
| | Burnout Detection | ✓ | - | ✓ | ✓ (4 ~ 20 mA and all T/C) |
| | Channel Independent Configuration | ✓ | ✓ | ✓ | ✓ |
| Isolation Voltage | | 3,000 V _{DC} | | 3,000 V _{DC} | 3,000 V _{DC} |
| Watchdog Timer | | ✓ (system and comm.) | ✓ (system and comm.) | ✓ (system and comm.) | ✓ (system and comm.) |
| Modbus Support * | | ✓ | ✓ | ✓ | ✓ |

*All ADAM-4000 I/O modules support ASCII commands

Analog Output

Digital Input/Output



| Model | | ADAM-4021 | ADAM-4024 | ADAM-4050 | ADAM-4051 | ADAM-4052 |
|-----------------------|-----------------|-----------------------|-----------------------|------------|-----------------------|------------------------|
| Resolution | | 12 bit | 12 bit | - | - | - |
| Analog Output | Channels | 1 | 4 | - | - | - |
| | Voltage Output | 0 ~ 10 V | ±10 V | - | - | - |
| | Current Output | 0 ~ 20, 4 ~ 20 mA | 0 ~ 20, 4 ~ 20 mA | - | - | - |
| Digital I/O | Input Channels | - | 4 | 7 | 16 | 8 |
| | Output Channels | - | - | 8 | - | - |
| | Alarm Settings | - | ✓ | - | - | - |
| Isolation Voltage | | 3,000 V _{DC} | 3,000 V _{DC} | - | 2,500 V _{DC} | 5,000 V _{RMS} |
| Digital LED Indicator | | - | - | - | Yes | - |
| Watchdog Timer | | ✓ (system) | ✓ (system and comm.) | ✓ (system) | ✓ (system and comm.) | ✓ (system) |
| Safety Setting | | - | ✓ | - | - | - |
| Modbus Support * | | - | ✓ | - | ✓ | - |

*All ADAM-4000 I/O modules support ASCII commands

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O & Wireless Sensing Modules

8

Industrial I/O and Video Solutions

I/O Module Selection Guide

Digital Input/Output

Relay Output

Counter



| Model | | ADAM-4053 | ADAM-4055 | ADAM-4056S/ 4056SO | ADAM-4060 | ADAM-4068 | ADAM-4069 | ADAM-4080 |
|-----------------------|-----------------------------------|------------|-----------------------|-----------------------|------------|----------------------|----------------------|------------------------|
| Resolution | | - | - | - | - | - | - | - |
| Analog Input | Channels | - | - | - | - | - | - | - |
| | Sampling Rate | - | - | - | - | - | - | - |
| | Voltage Input | - | - | - | - | - | - | - |
| | Current Input | - | - | - | - | - | - | - |
| | Direct Sensor Input | - | - | - | - | - | - | - |
| | Burnout Detection | - | - | - | - | - | - | - |
| | Channel Independent Configuration | - | - | - | - | - | - | - |
| Analog Output | Channels | - | - | - | - | - | - | - |
| | Voltage Output | - | - | - | - | - | - | - |
| | Current Output | - | - | - | - | - | - | - |
| Digital I/O | Input Channels | 16 | 8 | - | - | - | - | - |
| | Output Channels | - | 8 | 12 | 4-ch relay | 8-ch relay | 8-ch power relay | 2 |
| | Alarm Settings | - | - | - | - | - | - | Yes |
| Counter (32-bit) | Channels | - | - | - | - | - | - | 2 |
| | Input Frequency | - | - | - | - | - | - | 50 kHz |
| Isolation Voltage | | - | 2,500 V _{DC} | 5,000 V _{DC} | - | - | - | 2,500 V _{RMS} |
| Digital LED Indicator | | - | ✓ | ✓ | - | ✓ | - | - |
| Watchdog Timer | | ✓ (system) | ✓ (system and comm.) | ✓ (system and comm.) | ✓ (system) | ✓ (system and comm.) | ✓ (system and comm.) | ✓ (system) |
| Safety Setting | | - | ✓ | - | ✓ | ✓ | ✓ | - |
| Modbus Support * | | - | ✓ | ✓ | - | ✓ | ✓ | supported in E version |

*All ADAM-4000 I/O modules support ASCII commands

Communication and Controller Module Selection Guide

Repeaters



| Model | ADAM-4510 ADAM-4510S |
|-----------------------|---|
| Network | RS-422 RS-485 |
| Comm. Protocol | - |
| Comm. Speed (bps) | Serial: From 1,200 to 115.2K |
| Comm. Distance | Serial: 1.2 km |
| Interface Connectors | RS-422/485: plug-in screw terminal |
| LED Indicators | Communication and power |
| Data Flow Control | - |
| Watchdog Timer | - |
| Isolation Voltage | ADAM-4510: - ADAM-4510S: 3,000 V _{DC} |
| Special Features | - |
| Built-In I/O | - |
| Power Requirements | 10 ~ 30 V _{DC} |
| Operating Temperature | -10 ~ 70°C (14 ~ 158°F) |
| Operating Humidity | 5 ~ 95% RH |
| Power Consumption | 1.4 W @ 24 V _{DC} |

Converters



| Model | ADAM-4520 | ADAM-4521 | ADAM-4541 ADAM-4542+ | ADAM-4561 ADAM-4562 |
|-----------------------|--|--|---|--|
| Network | RS-232 to RS-422/485 | | Fiber optic to RS-232/422/485 | USB to RS-232/485/422 |
| Comm. Protocol | - | | | |
| Comm. Speed (bps) | Serial: From 1,200 to 115.2K | | | |
| Comm. Distance | Serial: 1.2 km | Serial: 1.2 km | ADAM-4541: 2.5 km ADAM-4542+: 15 km | Serial: 1.2 km |
| Interface Connectors | RS-232: female DB9 RS-422/485: plug-in screw terminal | RS-232: female DB9 RS-422/485: plug-in screw terminal | RS-232/422/485: plug-in screw terminal Fiber: ADAM-4541: ST connector ADAM-4542+: SC connector | USB: type A client connector Serial: ADAM-4561: plug-in screw terminal (RS-232/422/485) ADAM-4562: DB9 (RS-232) |
| LED Indicators | Communication and power | | | |
| Data Flow Control | - | ✓ | - | ✓ |
| Watchdog Timer | - | ✓ | - | ✓ |
| Isolation Voltage | 3,000 V _{DC} | 1,000 V _{DC} | - | ADAM-4561: 3,000 V _{DC} ADAM-4562: 2,500 V _{DC} |
| Power Requirements | 10 ~ 30 V _{DC} | | | |
| Operating Temperature | -10 ~ 70°C (14 ~ 158°F) | | | |
| Operating Humidity | 5 ~ 95% RH | | | |
| Power Consumption | 1.2 W @ 24 V _{DC} | 1 W @ 24 V _{DC} | ADAM-4541: 1.5 W @ 24 V _{DC} ADAM-4542+: 3 W @ 24 V _{DC} | ADAM-4561: 1.5 W @ 5 V _{DC} ADAM-4562: 1.1 W @ 5 V _{DC} |

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O & Wireless Sensing Modules

8

Industrial I/O and Video Solutions

Robust RS-485 I/O Module Selection Guide



| Model | | ADAM-4117 | ADAM-4118 | ADAM-4150 | ADAM-4168 |
|------------------------|-----------------------------------|--|---|----------------------------|----------------------------|
| Resolution | | 16 bit | | - | - |
| Analog Input | Channels | 8 differential | | - | - |
| | Sampling Rate | 10/100 Hz (total) | | - | - |
| | Voltage Input | 0 ~ 150 mV, 0 ~ 500 mV, 0 ~ 1 V, 0 ~ 5 V, 0 ~ 10 V, 0 ~ 15 V, ± 150 mV, ± 500 mV, ± 1 V, ± 5 V, ± 10 V, ± 15 V | ± 15 mV, ± 50 mV, ± 100 mV, ± 500 mV, ± 1 V, ± 2.5 V | - | - |
| | Current Input | 0 ~ 20, 4 ~ 20, ± 20 mA | 4 ~ 20, ± 20 mA | - | - |
| | Direct Sensor Input | - | J, K, T, E, R, S, B Thermocouple | - | - |
| | Burnout Detection | ✓ (mA) | ✓ (mA and All T/C) | - | - |
| | Channel Independent Configuration | ✓ | ✓ | - | - |
| Digital I/O | Input Channels | - | - | 7 | - |
| | Output Channels | - | - | 8 | 8-ch relay |
| Counter | Channels | - | - | 7 | - |
| | Input Frequency | - | - | 3 kHz | - |
| Isolation Voltage | | 3,000 V _{DC} | | | |
| Digital LED Indicator | | Communication and Power | | | |
| Watchdog Timer | | Yes (System & Communication) | | | |
| Safety Setting | | - | - | ✓ | ✓ |
| Communication Protocol | | ASCII Command/Modbus | | | |
| Power Requirements | | 10 ~ 48 V _{DC} | | | |
| Operating Temperature | | -40 ~ 85°C (-40 ~ 185°F) | | | |
| Storage Temperature | | -40 ~ 85°C (-40 ~ 185°F) | | | |
| Operating Humidity | | 5 ~ 95% RH | | | |
| Power Consumption | | 1.2 W @ 24 V _{DC} | 0.5 W @ 24 V _{DC} | 0.7 W @ 24 V _{DC} | 1.8 W @ 24 V _{DC} |
| Page | | 16-18 | | 16-19 | |



| Model | ADAM-4510I | ADAM-4520I |
|---------------------------|------------------------------------|--|
| Network | RS-422/485 | RS-232 to RS-422/485 |
| Communication Speed (bps) | From 1,200 to 115.2k | |
| Communication Distance | Serial: 1.2 km | |
| Interface Connectors | RS-422/485: plug-in screw terminal | RS-232: female DB9 RS-422/485: plug-in screw terminal |
| Digital LED Indicators | Communication and Power | |
| Auto Data Flow Control | ✓ | |
| Isolation Voltage | 3,000 V _{DC} | |
| Power Requirements | 10 ~ 48 V _{DC} | |
| Operating Temperature | -40 ~ 85°C (-40 ~ 185°F) | |
| Storage Temperature | -40 ~ 85°C (-40 ~ 185°F) | |
| Operating Humidity | 5 ~ 95% | |
| Power Consumption | 1.4 W @ 24 V _{DC} | 1.2 W @ 24 V _{DC} |
| Page | 16-18 | |

8

Industrial I/O and Video Solutions

8-2 Industrial I/O

8-23 Intelligent Video Solutions



Advantech Data Acquisition and Control Solutions



As a leading supplier of data acquisition products worldwide, Advantech offers a wide range of I/O devices with various interfaces and functions based on PC technology, from legacy ISA to modern USB and from signal-conditioning to graphical software tools.

Advantech's industrial I/O products are reliable, accurate, affordable, and suitable for many industrial automation applications (e.g., testing and measurement) and laboratory applications (e.g., monitoring, control, machine automation, and product testing).

Signal Sensing



Equipment

Sensor



Physical Phenomenon

Signal Conditioning



Signal Conditioners

Advantech's signal conditioners provide sensor and signal conditioning on a per-module basis for various types of sensors or signals.



I/O Wiring Terminal Boards

I/O wiring terminal boards offer convenient and reliable signal wiring for a wide range of Advantech products.



Analog Signal

Data Acquisition



Embedded Computers

MIC-1800 series units are standalone embedded computers with integrated data acquisition modules and signal conditioning to provide digital I/O, analog I/O, and counter functions. The palm-sized design with built-in terminals is suitable for space-limited applications.




SuperSpeed USB 3.0 DIO Modules

SuperSpeed USB 3.0 digital I/O modules can be leveraged for a diverse range of industrial control applications.



Conditioned Signal

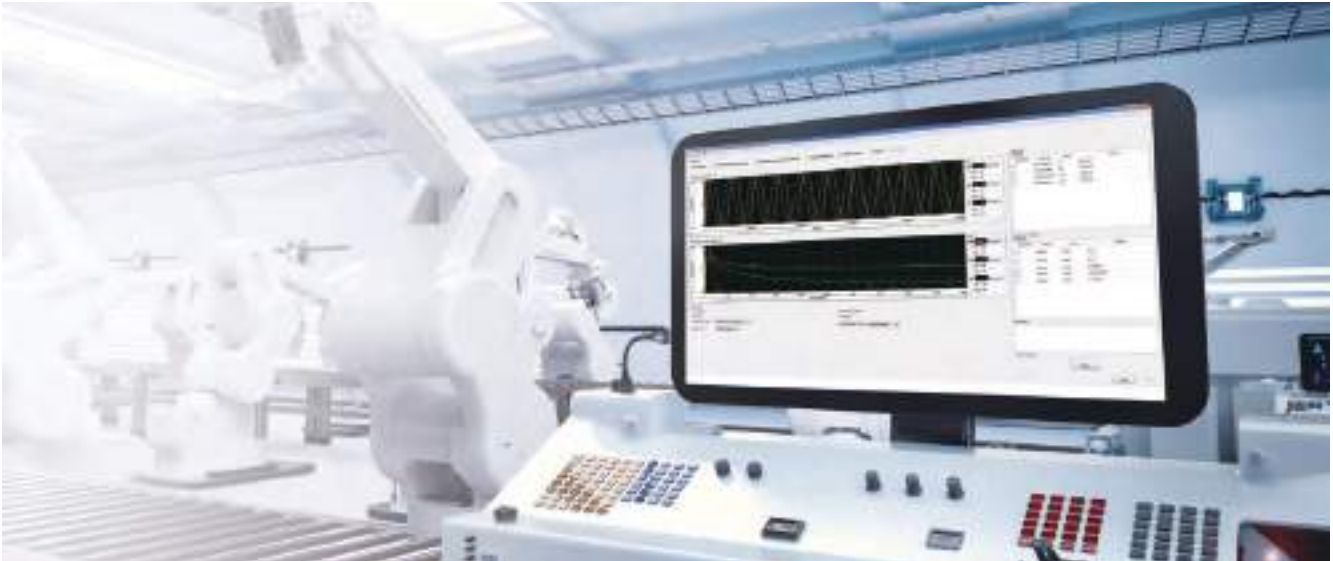

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O Modules

8

Industrial I/O and Video Solutions

and Control



Data Acquisition and Communication Cards

Advantech offers dedicated products for USB, PCI, PCI Express, CompactPCI, PC/104, and PCI-104 interfaces. Thus, regardless of whether the platform is an IPC, embedded PC, desktop computer, or laptop, your project requirements are covered.



USB Data Acquisition Modules

Advantech's USB data acquisition modules are renowned for their user-friendly design and ability to replace traditional serial and parallel devices by eliminating the need for external power and allowing for hot-swapping.



Conditioned Signal

Software

WebAccess/MCM



Machine Condition Monitoring Software

WebAccess/MCM is machine condition monitoring software that provides easy sensor signal acquisition, signal analysis, feature extraction, data management/interpretation, and alert notification.

DAQNavi



Software Development Package

DAQNavi, Advantech's next-generation driver package, delivers higher performance, compatibility, and reliability through a brand new driver and SDK.



Configurable Data Logging / Signal Analysis Software

DataLogger can be leveraged to help engineers perform data logging, recording, and visualization, while SignalMeter includes scope, AC performance, and DC performance functions to assist engineers with signal analysis.



Digital Data

Analog I/O and Multifunction Card Selection Guide



| Category | | Multifunction & Analog Input | | | | | | |
|---------------------|----------------------|-------------------------------|----------------------------|----------------------------|--|------------------------------------|------------------------------------|------------------------------------|
| Sampling / Updating | | Multiplexer | | | | | | |
| Part Number | | PCI-1710U/ 1710UL | PCI-1710HGU | PCI-1711U/ 1711UL | PCI-1712/ 1712L | PCI-1718HGU | PCI-1713U | PCI-1715U |
| Analog Input | Resolution | 12-bit | 12-bit | 12-bit | 12-bit | 12-bit | 12-bit | 12-bit |
| | Channels | 16 SE/8 diff. | 16 SE/8 diff. | 16 SE | 16 SE/8 diff. | 16 SE/8 diff. | 32 SE/16 diff. | 32 SE/16 diff. |
| | Onboard FIFO | 4,096 samples | 4,096 samples | 1,024 samples | 1,024 samples | 1,024 samples | 4,096 samples | 1,024 samples |
| | Sampling Rate | 100 kS/s | 100 kS/s | 100 kS/s | 1 MS/s | 100 kS/s | 100 kS/s | 500 kS/s |
| | Input Ranges | Unipolar Inputs | | - | 0 ~ 10, 0 ~ 5, 0 ~ 2.5, 0 ~ 1.25 V | 0 ~ 10, 0 ~ 5, 0 ~ 2.5, 0 ~ 1.25 V | 0 ~ 10, 0 ~ 5, 0 ~ 2.5, 0 ~ 1.25 V | 0 ~ 10, 0 ~ 5, 0 ~ 2.5, 0 ~ 1.25 V |
| | | Bipolar Inputs | | ±10, 5, 2.5, 1.25, 0.625 V | ±10, 5, 1, 0.5, 0.1, 0.05, 0.01, 0.005 V | ±10, 5, 2.5, 1.25, 0.625 V | ±10, 5, 2.5, 1.25, 0.625 V | ±10, 5, 2.5, 1.25, 0.625 V |
| | | Configurable Per Channel | | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Trigger Modes | Pacer/Software/External Pulse | | ✓ | ✓ | ✓ | ✓ | ✓ |
| | | Analog Slope | | - | - | ✓ | - | - |
| | | Advanced Trigger | | - | - | ✓ | - | - |
| | Data Transfer Modes | Software | | ✓ | ✓ | ✓ | ✓ | ✓ |
| | | DMA | | - | - | - | - | - |
| Analog Output | Resolution | 12-bit | 12-bit | 12-bit | 12-bit | 12-bit | - | - |
| | Channels | 2 (PCI-1710U only) | 2 | 2 (PCI-1711U only) | 2 (PCI-1712 only) | 1 | - | - |
| | Onboard FIFO | - | - | - | 32,768 samples | - | - | - |
| | Output Range | 0 ~ 5, 0 ~ 10 V | 0 ~ 5, 0 ~ 10 V | 0 ~ 5, 0 ~ 10 V | 0 ~ 5, 0 ~ 10, ±5, ±10 V | 0 ~ 5, 0 ~ 10 V | - | - |
| | Output Rate | Static update | Static update | Static update | 1 MHz | Static update | - | - |
| | DMA Transfer | - | - | - | ✓ | - | - | - |
| Digital I/O | Input Channels | 16 | 16 | 16 | 16 (shared) | 16 | - | - |
| | Output Channels | 16 | 16 | 16 | - | 16 | - | - |
| Timer/Counter | Channels | 1 | 1 | 1 | 3 | 1 | - | - |
| | Resolution | 16-bit | 16-bit | 16-bit | 16-bit | 16-bit | - | - |
| | Max. Input Frequency | 10 MHz | 10 MHz | 10 MHz | 10 MHz | 10 MHz | - | - |
| Isolation Voltage | | - | - | - | - | - | 2,500 V _{DC} | 2,500 V _{DC} |
| Auto Calibration | | - | - | - | ✓ | - | - | - |
| Board ID Switch | | ✓ | ✓ | ✓ | - | ✓ | - | ✓ |
| Dimensions (L x H) | | 175 x 100 mm (6.9" x 3.9") | 175 x 100 mm (6.9" x 3.9") | 175 x 100 mm (6.9" x 3.9") | 175 x 100 mm (6.9" x 3.9") | 175 x 100 mm (6.9" x 3.9") | 175 x 100 mm (6.9" x 3.9") | 175 x 100 mm (6.9" x 3.9") |
| Connector | | 68-pin SCSI | 68-pin SCSI | 68-pin SCSI | 68-pin SCSI | DB37 | DB37 | DB37 |
| Legacy Driver | Windows XP/2000 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | WinCE | ✓ | - | - | - | - | ✓ | - |
| | Linux | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | - |
| DAQ/Analog Driver | Windows 7/8/10 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | WinCE | ✓ | - | - | - | - | - | - |
| | Linux | - | - | ✓ | - | - | - | ✓ |
| LabVIEW Driver | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |

* All channels should be set to the same range.

✓: supported, -: not supported, △: optional



1
Software and Industry
Solutions

2
Industrial Server

3
Intelligent System

4
Intelligent HMI and
Monitors

5
Automation Computers
and Controllers

6
Industrial
Communication

7
Remote I/O Modules

8
Industrial I/O and
Video Solutions

| Category | | Multifunction & Analog Input | | | | | | |
|---------------------|----------------------|--------------------------------|----------------------------|------------------------------------|------------------------------------|-------------------------------------|----------------------------|---|
| Sampling / Updating | | Multiplexer | | | | | Simultaneous Sampling | |
| Part Number | | PCI-1716/ 1716L | PCI-1718HDU | PCI-1742U | PCI-1741U | PCI-1747U | PCI-1714U/ 1714UL | PCI-1706U |
| Analog Input | Resolution | 16-bit | 12-bit | 16-bit | 16-bit | 16-bit | 12-bit | 16-bit |
| | Channels | 16 SE/8 diff. | 16 SE/8 diff. | 16 SE/8 diff. | 16 SE/8 diff. | 64 SE/32 diff. | 4 SE | 8 diff. |
| | Onboard FIFO | 1,024 samples | 1,024 samples | 1,024 samples | 1,024 samples | 1,024 samples | 32,768/8,192 samples | 8,192 samples |
| | Sampling Rate | 250 kS/s | 100 kS/s | 1 MS/s | 200 kS/s | 250 kS/s | 30/10 MS/s | 250 kS/s |
| | Input Ranges | Unipolar Inputs | | 0 ~ 10, 0 ~ 5, 0 ~ 2.5, 0 ~ 1.25 V | 0 ~ 10, 0 ~ 5, 0 ~ 2.5, 0 ~ 1.25 V | 0 ~ 10, 0 ~ 5, 0 ~ 2.5, 0 ~ 1.25 V* | - | - |
| | | Bipolar Inputs | | ±10, 5, 2.5, 1.25, 0.625 V | ±10, 5, 2.5, 1.25, 0.625 V | ±10, 5, 2.5, 1.25, 0.625 V* | ±5, 2.5, 1, 0.5 V | ±10, 5, 2.5, 1.25 V |
| | | Configurable Per Channel | | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Trigger Modes | Pacer/Software/ External Pulse | | ✓ | ✓ | ✓ | Pacer/software | ✓ |
| | | Analog Slope | | - | - | - | ✓ | ✓ |
| | | Advanced Trigger | | - | - | - | ✓ | ✓ |
| Data Transfer Modes | Software | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | DMA | Bus mastering | - | Bus mastering | - | Bus mastering | Bus mastering | ✓ |
| Analog Output | Resolution | 16-bit | 12-bit | 16-bit | 16-bit | - | - | 12-bit |
| | Channels | 2 (PCI-1716 only) | 1 | 2 | 1 | - | - | 2 |
| | Onboard FIFO | - | - | - | - | - | - | - |
| | Output Range | 0 ~ 5, 0 ~ 10, ±5, ±10 V | 0 ~ 5, 0 ~ 10, ±5, ±10 V | 0 ~ 5, 0 ~ 10, ±5, ±10 V | ±5, ±10 V | - | - | 0 ~ 5, 0 ~ 10, ±5, ±10, 0 ~ 20, 0 ~ 24, 4 ~ 20 mA |
| | Output Rate | Static update | Static update | Static update | Static update | - | - | Static update |
| | DMA Transfer | - | - | - | - | - | - | - |
| Digital I/O | Input Channels | 16 | 16 | 16 | 16 | - | - | 16 (shared) |
| | Output Channels | 16 | 16 | 16 | 16 | - | - | |
| Timer/ Counter | Channels | 1 | 1 | 1 | 1 | - | - | 2 |
| | Resolution | 16-bit | 16-bit | 16-bit | 16-bit | - | - | 32-bit |
| | Max. Input Frequency | 10 MHz | 10 MHz | 10 MHz | 10 MHz | - | - | 10 MHz |
| Isolation Voltage | | - | - | - | - | - | - | - |
| Auto Calibration | | ✓ | - | ✓ | ✓ | ✓ | ✓ | ✓ |
| Board ID Switch | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Dimensions (L x H) | | 175 x 100 mm (6.9" x 3.9") | 175 x 100 mm (6.9" x 3.9") | 175 x 100 mm (6.9" x 3.9") | 175 x 100 mm (6.9" x 3.9") | 175 x 100 mm (6.9" x 3.9") | 175 x 100 mm (6.9" x 3.9") | 175 x 100 mm (6.9" x 3.9") |
| Connector | | 68-pin SCSI | DB37 | 68-pin SCSI | 68-pin SCSI | 68-pin SCSI | 4 x BNC | 68-pin SCSI |
| Legacy Driver | Windows XP/2000 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | WinCE | - | - | - | - | ✓ | - | - |
| | Linux | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| DAQ/Analog Driver | Windows 7/8/10 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | WinCE | - | - | - | - | - | - | - |
| | Linux | - | - | - | ✓ | ✓ | ✓ | - |
| LabVIEW Driver | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |

* All channels should be set to the same range.

✓: supported, -: not supported, △: optional

Analog I/O and Multifunction Card Selection Guide



| Category | | Multifunction & Analog Output | | | | |
|---------------------|----------------------|--|-------------------------------|-------------------------------|-------------------------------|--|
| Sampling / Updating | | Static Update | | | | Dynamic Update |
| Part Number | | PCI-1713U | PCI-1727U | PCI-1724U | PCI-1723 | PCI-1721 |
| Analog Input | Resolution | 12-bit | - | - | - | - |
| | Channels | 32 SE/16 diff. | - | - | - | - |
| | Onboard FIFO | 4,096 samples | - | - | - | - |
| | Sampling Rate | 100 kS/s | - | - | - | - |
| | Input Ranges | Unipolar Inputs 0 ~ 10, 0 ~ 5, 0 ~ 2.5, 0 ~ 1.25 V | - | - | - | - |
| | | Bipolar Inputs ±10, 5, 2.5, 1.25, 0.625 V | - | - | - | - |
| | | Configurable Per Channel | ✓ | - | - | - |
| | Trigger Modes | Pacer/ Software/ External Pulse | ✓ | - | - | - |
| | | Analog Slope | - | - | - | - |
| | | Advanced Trigger | - | - | - | - |
| | Data Transfer Modes | Software | ✓ | - | - | - |
| | | DMA | - | - | - | - |
| Analog Output | Resolution | - | 14-bit | 14-bit | 16-bit | 16-bit |
| | Channels | - | 12 | 32 | 8 | 4 (waveform output) |
| | Onboard FIFO | - | - | - | - | 1,024 samples |
| | Output Range | - | ±10, 0 ~ 20 mA | ±10, 0 ~ 20 mA | ±10, 0 ~ 20, 4 ~ 20 mA | 0 ~ 5, 0 ~ 10, ±5, ±10, 0 ~ 20, 4 ~ 20 mA |
| | Output Rate | - | Static update | Static update | Static update | 10 MHz |
| | DMA Transfer | - | - | - | - | Bus mastering |
| Digital I/O | Input Channels | - | 16 | - | 16 (shared) | 16 (shared) |
| | Output Channels | - | 16 | - | | |
| Timer/Counter | Channels | - | - | - | - | 1 |
| | Resolution | - | - | - | - | 16-bit |
| | Max. Input Frequency | - | - | - | - | 10 MHz |
| Isolation Voltage | | 2,500 V _{DC} | - | 1,500 V _{DC} | - | - |
| Auto Calibration | | - | - | - | ✓ | ✓ |
| Board ID Switch | | - | ✓ | ✓ | ✓ | ✓ |
| Dimensions (L x H) | | 175 x 100 mm (6.9" x 3.9") | 175 x 100 mm (6.9" x 3.9") | 175 x 100 mm (6.9" x 3.9") | 175 x 100 mm (6.9" x 3.9") | 175 x 100 mm (6.9" x 3.9") |
| Connector | | DB37 | 2 x 2-pin DB37 | DB62 | 68-pin SCSI | 68-pin SCSI |
| Legacy Driver | Windows XP/2000 | ✓ | ✓ | ✓ | ✓ | ✓ |
| | WinCE | ✓ | - | ✓ | - | - |
| | Linux | ✓ | ✓ | ✓ | ✓ | ✓ |
| DAQ/NI Driver | Windows 7/8/10 | ✓ | ✓ | ✓ | ✓ | ✓ |
| | WinCE | - | - | - | - | - |
| | Linux | - | ✓ | ✓ | - | ✓ |
| LabVIEW Driver | | ✓ | ✓ | ✓ | ✓ | ✓ |

* 80 kHz on Pentium® 4-based (or higher) systems.


** SS: Single DMA channel, single A/D channel scan.

✓: supported, -: not supported, △: optional

NEW

NEW

NEW



| Category | | | Multifunction & Analog Input | | | | | | |
|---------------------|----------------------|---------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|--|--|---|-------------------------------|
| Sampling / Updating | | | Multiplexer | | Simultaneous Sampling | | | | |
| Part Number | | | PCIE-1810 | PCIE-1816/H | PCIE-1812 | PCIE-1813 | PCIE-1802/ 1802L | PCIE-1840/ 1840L | |
| Analog Input | Resolution | | 12-bit | 16-bit | 16-bit | 26-bit | 24-bit | 16-bit | |
| | Channels | | 16 SE/8 diff. | 16 SE/8 diff. | 8 diff. | 4 diff. | 8 diff./ 4 diff. | 4 SE | |
| | Onboard FIFO | | 4,096 samples | 4,096 samples | 4,096 samples | 4,096 samples | 4,096 samples | 1 G samples | |
| | Sampling Rate | | 500 kS/s | 500 KSPS/ 1MSPS | 250 kS/s | 38.4 kS/s | 216 kS/s | 125/80 MSPS | |
| | Input Ranges | Unipolar Inputs | 0 ~ 10, 0 ~ 5, 0 ~ 2.5, 0 ~ 1.25 V | 0 ~ 10, 0 ~ 5, 0 ~ 2.5, 0 ~ 1.25 V | 0 ~ 10, 0 ~ 5, 0 ~ 2.5, 0 ~ 1.25 V | ±31.25 mV/V, ±62.5 mV/V, ±125 mV/V, ±250 mV/V, ±500 mV/V, and ±1 V/V (bridge inputs) | - | - | |
| | | | Bipolar Inputs | ±10, ±5, 2.5, 1.25, 0.625 V | ±10, ±5, 2.5, 1.25, 0.625 V | ±10, ±5, 2.5, 1.25, 0.625 V | ±10 V, ±5 V, ±2.5 V, ±1.25 V, ±625 mV, ±312.5 mV | ±0.2, ±0.5, ±1, ±2, ±5, ±10 V | 0.2, 0.4, 1, 2, 4, 10, 20 Vpp |
| | | | Configurable Per Channel | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Trigger Modes | Pacer/ Software/ External Pulse | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| | | Analog Slope | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| | | Advanced Trigger | Start/Stop/Delayed Start/Delayed Stop | Start/Stop/Delayed Start/Delayed Stop | Start/Stop/Delayed Start/Delayed Stop | Start/Stop/Delayed Start/Delayed Stop | Start/Stop/Delayed Start/Delayed Stop | Start/Stop/Delayed Start/Delayed Stop | |
| | Data Transfer Modes | Software | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| | | DMA | Bus mastering | Bus mastering | Bus mastering | Bus mastering | Bus mastering | Bus mastering | |
| Analog Output | Resolution | | 12-bit | 16-bit | 16-bit | 16-bit | - | - | |
| | Channels | | 2 (waveform output) | 2 (waveform output) | 2 (waveform output) | 2 (waveform output) | - | - | |
| | Onboard FIFO | | 4,096 samples | 4,096 samples | 4,096 samples | 4,096 samples | - | - | |
| | Output Range | | 0 ~ 5, 0 ~ 10, ±5, ±10 V | 0 ~ 5, 0 ~ 10, ±5, ±10 V | 0 ~ 5, 0 ~ 10, ±5, ±10 V | 0 ~ 5, 0 ~ 10, ±5, ±10 V | - | - | |
| | Output Rate | | 500 kS/s | 3 MHz | 3 MHz | 3 MHz | - | - | |
| | DMA Transfer | | Bus mastering | Bus mastering | Bus mastering | Bus mastering | - | - | |
| Digital I/O | Input Channels | | 24 (shared) | 24 (shared) | 32 (shared) | 32 (shared) | 1 | - | |
| | Output Channels | | | | | | 2 | | |
| Timer/ Counter | Channels | | 2 | 2 | 4 (encoder included) | 4 (encoder included) | - | - | |
| | Resolution | | 32-bit | 32-bit | 32-bit | 32-bit | - | - | |
| | Max. Input Frequency | | 10 MHz | 10 MHz | 10 MHz | 10 MHz | - | - | |
| Isolation Voltage | | | - | - | - | - | - | - | |
| Auto Calibration | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| Board ID Switch | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| Dimensions (L x H) | | | 175 x 100 mm (6.9" x 3.9") | 175 x 100 mm (6.9" x 3.9") | 175 x 100 mm (6.9" x 3.9") | 175 x 100 mm (6.9" x 3.9") | 175 x 100 mm (6.9" x 3.9") | 175 x 100 mm (6.9" x 3.9") | |
| Connector | | | 68-pin SCSI | 68-pin SCSI | 100-pin SCSI (female) | 100-pin SCSI (female) | 1 x 19-pin MINI SCSI (for AI) 1 x HDMI (for Ext. clock and trigger) | 4 x BNC (for AI) 1 x HDMI (for Ext. clock and trigger) | |
| Legacy Driver | Windows XP/2000 | | - | - | - | - | - | - | |
| | WinCE | | - | - | - | - | - | - | |
| | Linux | | - | - | - | - | - | - | |
| DAQ/NI Driver | Windows 7/8/10 | | ✓ | ✓ | ✓ | ✓ | - | - | |
| | WinCE | | - | - | - | - | - | - | |
| | Linux | | - | - | - | - | - | - | |
| LabVIEW Driver | | | ✓ | ✓ | ✓ | ✓ | - | - | |

* 80 kHz on Pentium® 4-based (or higher) systems.

** SS: Single DMA channel, single A/D channel scan.

✓: supported, -: not supported, △: optional

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O Modules

8

Industrial I/O and Video Solutions

Digital I/O and Counter Card Selection Guide



| Category | | | Non-Isolated Digital I/O | | | | | |
|----------------------|-------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|---------------------------|---------------|
| Bus | | | PCI | | | | | |
| Part Number | | | PCI-1735U | PCI-1737U | PCI-1739U | PCI-1751 | PCI-1753 | PCI-1757UP |
| TTL DI/O | Input Channels | | 32 | 24 | 48 | 48 | 96 | 24 |
| | Output Channels | | 32 | (shared) | (shared) | (shared) | (shared) | (shared) |
| | Output Channel | Sink Current | 24 mA @ 0.5 V | 24 mA @ 0.4 V | 24 mA @ 0.4 V | 24 mA @ 0.4 V | 24 mA @ 0.44 V | 24 mA @ 0.5 V |
| | | Source Current | 15 mA @ 2.0 V | 15 mA @ 2.4 V | 15 mA @ 2.4 V | 15 mA @ 2.4 V | 24 mA @ 3.76 V | 24 mA @ 3.7 V |
| Isolated Digital I/O | Input | Channels | - | - | - | - | - | - |
| | | Isolation Voltage | - | - | - | - | - | - |
| | | Input Range | - | - | - | - | - | - |
| | Output | Channels | - | - | - | - | - | - |
| | | Isolation Voltage | - | - | - | - | - | - |
| | | Output Range | - | - | - | - | - | - |
| | | Max. Sink Current | - | - | - | - | - | - |
| Timer/Counter | Channels | 3 | - | - | 3 | - | - | |
| | Resolution | 16-bit | - | - | 16-bit | - | - | |
| | Max. Input Frequency | 10 MHz | - | - | 10 MHz | - | - | |
| Advanced Function | Pattern Match | - | - | - | - | ✓ | - | |
| | Change of State | - | - | - | - | ✓ | - | |
| | Board ID Switch | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| | Channel-Freeze Function | - | - | - | - | - | - | |
| | Output Status Read Back | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| | Dry/Wet Contact* | - | ✓ | ✓ | ✓ | ✓ | ✓ | |
| | Dimensions (L x H) | 175 x 100 mm (6.9" x 3.9") | 175 x 100 mm (6.9" x 3.9") | 175 x 100 mm (6.9" x 3.9") | 175 x 100 mm (6.9" x 3.9") | 175 x 100 mm (6.9" x 3.9") | 120 x 65 mm (4.7" x 2.5") | |
| Connector | | 5 x 20-pin | 1 x 50-pin | 2 x 50-pin | 68-pin SCSI | 100-pin SCSI | 1 x DB25 | |
| Legacy Driver | Windows XP/2000 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| | WinCE | - | - | - | - | - | - | |
| | Linux | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| DAQnavi Driver | Windows 7/8/10 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| | WinCE | - | - | - | - | - | - | |
| | Linux | - | - | - | ✓ | - | - | |
| LabVIEW Driver | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |

* Simultaneous dry/wet contact within a group is acceptable.

✓ : supported, - : not supported, △ : optional

NEW

NEW



| Category | | | Isolated Digital I/O | | | | |
|----------------------|-------------------------|-------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|---|
| Bus | | | PCI Express | | | | |
| Part Number | | | PCIE-1730/1730H | PCIE-1752 | PCIE-1754 | PCIE-1756/ 1756H | PCIE-1760 |
| TTL D/I/O | Input Channels | | 16 | - | - | - | - |
| | Output Channels | | 16 | - | - | - | - |
| | Output Channel | Sink Current | 24 mA @ 0.5 V | - | - | - | - |
| | | Source Current | 15 mA @ 2.4 V | - | - | - | - |
| Isolated Digital I/O | Input | Channels | 16 | - | 64 | 32 | 8 |
| | | Isolation Voltage | 2,500 V _{DC} | - | 2,500 V _{DC} | 2,500 V _{DC} | 2,500 V _{DC} |
| | | Input Range | 10 ~ 30 V _{DC} | - | 10 ~ 30 V _{DC} | 10 ~ 30 V _{DC} | 4.5 ~ 12 V _{DC} |
| | Output | Channels | 16 (sink) | 64 (sink) | - | 32 (sink) | 6 x Form A 2 x Form C |
| | | Isolation Voltage | 2,500 V _{DC} | 2,500 V _{DC} | - | 2,500 V _{DC} | 2,500 V _{DC} |
| | | Output Range | 5 ~ 40 V _{DC} | 5 ~ 40 V _{DC} | - | 5 ~ 40 V _{DC} | 1 A @ 125 V _{AC} 2 A @ 30 V _{AC} |
| | | Max. Sink Current | 500 mA | 500 mA | - | 500 mA | |
| | Timer/ Counter | Channels | | - | - | - | - |
| Resolution | | - | - | - | - | 16-bit | |
| Max. Input Frequency | | - | - | - | - | 500 Hz | |
| Advanced Function | Pattern Match | | - | - | - | - | ✓ |
| | Change of State | | - | - | - | - | ✓ |
| | Board ID Switch | | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Channel-Freeze Function | | ✓ | ✓ | - | ✓ | - |
| | Output Status Read Back | | ✓ | ✓ | - | ✓ | ✓ |
| | Dry/Wet Contact* | | ✓ | - | - | - | - |
| | | | | | | | |
| Dimensions (L x H) | | | 175 x 100 mm (6.9" x 3.9") | 175 x 100 mm (6.9" x 3.9") | 175 x 100 mm (6.9" x 3.9") | 175 x 100 mm (6.9" x 3.9") | 175 x 100 mm (6.9" x 3.9") |
| Connector | | | 1 x DB37 4 x 20-pin | 100-pin SCSI | 100-pin SCSI | 100-pin SCSI | 1 x DB37 |
| Legacy Driver | Windows XP/2000 | | - | - | - | - | - |
| | WinCE | | - | - | - | - | - |
| | Linux | | - | - | - | - | - |
| DAQNavi Driver | Windows 7/8/10 | | ✓ | ✓ | ✓ | ✓ | ✓ |
| | WinCE | | - | - | - | - | - |
| | Linux | | - | - | - | - | ✓ |
| LabVIEW Driver | | | ✓ | ✓ | ✓ | ✓ | ✓ |

* Simultaneous dry/wet contact within a group is acceptable.

✓: supported, -: not supported, △: optional

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O Modules

8

Industrial I/O and Video Solutions

Digital I/O and Counter Card Selection Guide




| Category | | | Isolated Digital I/O | | | Non-Isolated Digital I/O | |
|----------------------|-------------------------|--------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|
| Bus | | | PCI Express | | | | |
| Part Number | | | PCIE-1761H | PCIE-1762H | PCIE-1765 | PCIE-1751 | PCIE-1753 |
| TTL D/I/O | Input Channels | | - | - | - | 48 (shared) | 96 (shared) |
| | Output Channels | | - | - | - | | |
| | Output Channel | Sink Current | - | - | - | 15 mA @ 0.8 V | 15 mA @ 0.8 V |
| | | Source Current | - | - | - | 15 mA @ 2.0 V | 15 mA @ 2.0 V |
| Isolated Digital I/O | Input | Channels | 8 | 16 | - | - | - |
| | | Isolation Voltage | 2,500 V _{DC} | 2,500 V _{DC} | - | - | - |
| | | Input Range | 4.5 ~ 12 V _{DC} | 10 ~ 50 V _{DC} | - | - | - |
| | Output | Channels | 6 x Form A 2 x Form C | 16** | 12 Form C | - | - |
| | | Isolation Voltage | 2,500 V _{DC} | 2,500 V _{DC} | 2,500 V _{DC} | - | - |
| | | Output Range | 1 A @ 125 V _{AC} | 0.25 A @ 250 V _{AC} | 1A @ 125 V _{AC} | - | - |
| | | Max. Sink Current | 2 A @ 30 V _{DC} | 2 A @ 30 V _{DC} | 2A @ 30 V _{DC} | - | - |
| | Timer/ Counter | Channels | | 8 x CTR 2 x PWM | - | - | 3 |
| Resolution | | 16-bit (2,500 isolation) | - | - | 32-bit | - | |
| Max. Input Frequency | | 500 Hz for CTR | - | - | 10 MHz | - | |
| Advanced Function | Pattern Match | | ✓ | - | - | ✓ | ✓ |
| | Change of State | | ✓ | - | - | ✓ | ✓ |
| | Board ID Switch | | ✓ | ✓ | - | ✓ | ✓ |
| | Channel-Freeze Function | | - | ✓ | - | - | - |
| | Output Status Read Back | | ✓ | ✓ | - | ✓ | ✓ |
| | Dry/Wet Contact* | | - | - | - | ✓ | ✓ |
| Dimensions (L x H) | | | 175 x 100 mm (6.9" x 3.9") | 175 x 100 mm (6.9" x 3.9") | 175 x 100 mm (6.9" x 3.9") | 168 x 100 mm (6.6" x 3.9") | 168 x 100 mm (6.6" x 3.9") |
| Connector | | | 1 x DB37 | 1 x DB62 | 1 x DB37 | 68-pin SCSI | 68-pin SCSI |
| Legacy Driver | Windows XP/2000 | | - | ✓ | - | - | - |
| | WinCE | | ✓ | ✓ | - | - | - |
| | Linux | | - | ✓ | - | - | - |
| DAQNavi Driver | Windows 7/8/10 | | ✓ | ✓ | ✓ | ✓ | ✓ |
| | WinCE | | - | - | - | - | - |
| | Linux | | - | ✓ | - | - | - |
| LabVIEW Driver | | | ✓ | ✓ | ✓ | ✓ | ✓ |

* Simultaneous dry/wet contact within a group is acceptable.

** Jumper selectable Form A / Form B type relay output

✓: supported, -: not supported, △: optional



| Category | | | Isolated Digital I/O | | | | | |
|----------------------|-------------------------|-------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| Bus | | | PCI | | | | | |
| Part Number | | | PCI-1730U | PCI-1733 | PCI-1734 | PCI-1750/ 1750SO | PCI-1752U/ 1752USO | PCI-1754 |
| TTL D/I/O | Input Channels | | 16 | - | - | - | - | - |
| | Output Channels | | 16 | - | - | - | - | - |
| | Output Channel | Sink Current | 24 mA @ 0.5 V | - | - | - | - | - |
| | | Source Current | 15 mA @ 2.4 V | - | - | - | - | - |
| Isolated Digital I/O | Input | Channels | 16 | 32 | - | 16 | - | 64 |
| | | Isolation Voltage | 2,500 V _{DC} | 2,500 V _{DC} | - | 2,500 V _{DC} | - | 2,500 V _{DC} |
| | | Input Range | 5 ~ 30 V _{DC} | 5 ~ 30 V _{DC} | - | 5 ~ 50 V _{DC} | - | 10 ~ 50 V _{DC} |
| | Output | Channels | 16 (sink) | - | 32 (sink) | 16 (sink/source) | 64 (sink/source) | - |
| | | Isolation Voltage | 2,500 V _{DC} | - | 2,500 V _{DC} | 2,500 V _{DC} | 2,500 V _{DC} | - |
| | | Output Range | 5 ~ 40 V _{DC} | - | 5 ~ 40 V _{DC} | 5 ~ 40 V _{DC} | 5 ~ 40 V _{DC} | - |
| | | Max. Current | 300 mA | - | 200 mA | 200 mA | 200 mA | - |
| Timer/ Counter | Channels | | - | - | - | 1 | - | - |
| | Resolution | | - | - | - | 16-bit | - | - |
| | Max. Input Frequency | | - | - | - | 1 MHz | - | - |
| Advanced Function | Pattern Match | | - | - | - | - | - | - |
| | Change of State | | - | - | - | - | - | - |
| | Board ID Switch | | ✓ | ✓ | ✓ | - | ✓ | ✓ |
| | Channel-Freeze Function | | ✓ | - | - | - | ✓ | - |
| | Output Status Read Back | | ✓ | - | ✓ | - | ✓ | - |
| | Dry/Wet Contact* | | ✓ | ✓ | - | ✓ | - | - |
| Dimensions (L x H) | | | 175 x 100 mm (6.9" x 3.9") | 175 x 100 mm (6.9" x 3.9") | 175 x 100 mm (6.9" x 3.9") | 175 x 100 mm (6.9" x 3.9") | 175 x 100 mm (6.9" x 3.9") | 175 x 100 mm (6.9" x 3.9") |
| Connector | | | 1 x DB37 4 x 20-pin | 1 x DB37 | 1 x DB37 | 1 x DB37 | 100-pin SCSI | 100-pin SCSI |
| Legacy Driver | Windows XP/2000 | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | WinCE | | ✓ | - | ✓ | ✓ | ✓ | ✓ |
| | Linux | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| DAQ/Analog Driver | Windows 7/8/10 | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | WinCE | | - | - | - | - | - | - |
| | Linux | | ✓ | - | - | ✓ | ✓ | - |
| LabVIEW Driver | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |

* Simultaneous dry/wet contact within a group is acceptable.

✓: supported, -: not supported, △: optional

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O Modules

8

Industrial I/O and Video Solutions

Digital I/O and Counter Card Selection Guide



| Category | | | Isolated Digital I/O | | | | | | |
|----------------------|-------------------------|-------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|---|---|--|
| Bus | | | PCI | | | | | | |
| Part Number | | | PCI-1756 | PCI-1758UDI | PCI-1758UDO | PCI-1758UDIO | PCI-1760U | PCI-1761 | PCI-1762 |
| TTL D/I/O | Input Channels | | - | - | - | - | - | - | - |
| | Output Channels | | - | - | - | - | - | - | - |
| | Output Channel | Sink Current | - | - | - | - | - | - | - |
| | | Source Current | - | - | - | - | - | - | - |
| Isolated Digital I/O | Input | Channels | 32 | 128 | - | 64 | 8 | 8 | 16** |
| | | Isolation Voltage | 2,500 V _{DC} | 2,500 V _{RMS} | - | 2,500 V _{DC} | 2,500 V _{DC} | 3,750 V _{DC} | 2,500 V _{DC} |
| | | Input Range | 10 ~ 50 V _{DC} | 5 ~ 25 V _{DC} | - | 5 ~ 25 V _{DC} | 4.5 ~ 12 V _{DC} | 5 ~ 50 V _{DC} | 10 ~ 50 V _{DC} |
| | Output | Channels | 32 (Sink) | - | 128 | 64 | 6 x Form A 2 x Form C | 4 x Form A 4 x Form C | 16 |
| | | Isolation Voltage | 2,500 V _{DC} | - | 2,500 V _{RMS} | 2,500 V _{DC} | 2,500 V _{DC} | 2,500 V _{DC} | 2,500 V _{DC} |
| | | Output Range | 5 ~ 40 V _{DC} | - | 5 ~ 40 V _{DC} | 5 ~ 40 V _{DC} | 1 A @ 125 V _{AC} 2 A @ 30 V _{DC} | 8 A @ 250 V _{AC} 2 A @ 30 V _{DC} | 0.25 A @ 250 V _{AC} 2 A @ 30 V _{DC} |
| | | Max. Sink Current | 200 mA | - | 90 mA | 90 mA | | | |
| | Timer/Counter | Channels | | - | - | - | - | 8 x CTR 2 x PWM | - |
| Resolution | | - | - | - | - | 16-bit (2,500 isolation) | - | - | |
| Max. Input Frequency | | - | - | - | - | 500 Hz for CTR | - | - | |
| Advanced Function | Pattern Match | | - | - | - | - | ✓ | - | - |
| | Change of State | | - | - | - | - | ✓ | - | - |
| | Board ID Switch | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Channel-Freeze Function | | ✓ | - | - | - | - | - | ✓ |
| | Output Status Read Back | | ✓ | - | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Dry/Wet Contact* | | - | - | - | - | - | - | - |
| Dimensions (L x H) | | | 175 x 100 mm (6.9" x 3.9") | 175 x 100 mm (6.9" x 3.9") | 175 x 100 mm (6.9" x 3.9") | 175 x 100 mm (6.9" x 3.9") | 175 x 100 mm (6.9" x 3.9") | 175 x 100 mm (6.9" x 3.9") | 175 x 100 mm (6.9" x 3.9") |
| Connector | | | 100-pin SCSI | Dual 100-pin mini SCSI | Dual 100-pin mini SCSI | Dual 100-pin mini SCSI | 1 x DB37 | 1 x DB37 | 1 x DB62 |
| Legacy Driver | Windows XP/2000 | | - | ✓ | ✓ | ✓ | - | ✓ | ✓ |
| | WinCE | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Linux | | - | ✓ | ✓ | ✓ | - | ✓ | ✓ |
| DAQNav Driver | Windows 7/8/10 | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | WinCE | | - | - | - | - | - | - | - |
| | Linux | | - | ✓ | ✓ | ✓ | - | ✓ | ✓ |
| LabVIEW Driver | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |

* Simultaneous dry/wet contact within a group is acceptable.

** Jumper selectable Form A / Form B type relay output

✓: supported, -: not supported, Δ: optional



| Category | | | Isolated Digital I/O | | | | Counter | |
|----------------------|-------------------------|--------------------------|--|-----------------------------|-----------------------------|--|-------------------------------|-----------------------------|
| Bus | | | PC/104 | | PCI-104 | | PCI | PC/104 |
| Part Number | | | PCM-3725 | PCM-3730 | PCM-3730I | PCM-3761I | PCI-1780U | PCM-3780 |
| TTL DI/O | Input Channels | | 8 | 16 | - | - | 8 | 24 (shared) |
| | Output Channels | | 8 | 16 | - | - | 8 | |
| | Output Channel | Sink Current | - | 0.5 V @ 8 mA | - | - | 24 mA @ 0.5 V | 24 mA @ 0.5 V |
| | | Source Current | - | 0.4 mA @ 2.4 V | - | - | 15 mA @ 2.4 V | 15 mA @ 2.0 V |
| Isolated Digital I/O | Input | Channels | 8 | 8 | 16 | 8 | - | - |
| | | Isolation Voltage | 2,500 V _{DC} | 2,500 V _{DC} | 2,500 V _{DC} | 2,500 V _{DC} | - | - |
| | | Input Range | 10 ~ 50 V _{DC} | 5 ~ 24 V _{DC} | 5 ~ 30 V _{DC} | 5 ~ 30 V _{DC} | - | - |
| | Output | Channels | 8 x Form C | 8 | 16 | 8 x Form C | - | - |
| | | Isolation Voltage | 2,000 V _{DC} | 2,500 V _{DC} | 2,500 V _{DC} | 2,000 V _{DC} | - | - |
| | | Output Range | 0.25A @ 240 V _{DC} 1A @ 30 V _{DC} | 5 ~ 40 V _{DC} | 5 ~ 30 V _{DC} | 0.25 A @ 250 V _{AC} 2 A @ 30 V _{DC} | - | - |
| | | Max. Sink Current | | 200 mA | 300 mA | | - | - |
| Timer/ Counter | Channels | | - | - | - | - | 8 x CTR | 2 |
| | Resolution | | - | - | - | - | 16-bit | 16-bit |
| | Max. Input Frequency | | - | - | - | - | 20 MHz | 20 MHz |
| Advanced Function | Pattern Match | | - | - | - | - | - | - |
| | Change of State | | - | - | - | - | - | - |
| | Board ID Switch | | - | - | - | ✓ | ✓ | - |
| | Channel-Freeze Function | | - | - | - | - | - | - |
| | Output Status Read Back | | - | - | - | ✓ | - | - |
| | Dry/Wet Contact* | | - | - | - | - | - | - |
| | Dimensions (L x H) | | 96 x 90 mm (3.8" x 3.5") | 96 x 90 mm (3.8" x 3.5") | 96 x 90 mm (3.8" x 3.5") | 96 x 90 mm (3.8" x 3.5") | 175 x 100 mm (6.9" x 3.9") | 96 x 90 mm (3.8" x 3.5") |
| Connector | | 1 x 20-pin 1 x 50-pin | 3 x 20-pin | 2 x 20-pin | 1 x 20-pin 1 x 50-pin | 68-pin SCSI | 1 x 50-pin 1 x 20-pin | |
| Legacy Driver | Windows XP/2000 | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | WinCE | | ✓ | ✓ | ✓ | ✓ | - | ✓ |
| | Linux | | ✓ | ✓ | ✓ | ✓ | ✓ | - |
| DAQNavi Driver | Windows 7/8/10 | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | WinCE | | - | - | - | - | - | - |
| | Linux | | - | - | - | ✓ | - | - |
| LabVIEW I/O Driver | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |

* Simultaneous dry/wet contact within a group is acceptable.

** Jumper-selectable Form A/B-type relay output.

✓: supported, -: not supported, △: optional

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O Modules

8


Industrial I/O and Video Solutions

Terminal Board Selection Guide

Recommended Cables, I/O Wiring Terminal Boards, and Isolated Digital I/O Terminals for Connecting to PC/104 and PCI-104 DAQ Products

| PCI and USB Product | Cable | I/O Wiring Terminal Board | Cable | Digital I/O Terminal |
|--|-------------------------------------|--|--|----------------------|
| PCI-1710U/1710UL/1710HGU PCI-1711U/1711UL PCI-1716/1716L PCI-1706U/ PCI-1742U PCIE-1810/ PCIE-1816/ PCIE-1816H | PCL-10168 PCL-10168H | PCLD-8710/ 8810I/ 8810E ADAM-3968 | PCL-10120 PCL-10121 | ADAM-3920 |
| PCI-1712/1712L | PCL-10168 PCL-10168H | PCLD-8712 | | |
| PCI-1718HDU/HGU | PCL-10137 | ADAM-3937, PCLD-880 PCLD-8115, PCLD-789D | | |
| PCI-1727U PCI-1730U PCIE-1730 | PCL-10120 PCL-10121 PCL-10137 | PCL-10502+ PCL-10120, PCL-10121 PCL-10503+ PCL-10137, ADAM-3937 | | PCLD-782 |
| | ADAM-3937 PCLD-880 | | | |
| PCI-1751/ PCIE-1751 | PCL-10168 | ADAM-3968 PCLD-8751, PCLD-8761 PCLD-8762 | PCL-10150+ ADAM-3950 PCLD-782B PCLD-785B PCLD-885 PCLD-7216 | PCLD-782B |
| PCI-1753/ PCIE-1753 | PCL-10268 | ADAM-3968/50 ADAM-3968/20 | PCL-10120 | PCLD-785 |
| PCI-1713U, PCI-1715U | PCL-10137 | ADAM-3937 PCLD-880 PCLD-881B | | |
| PCI-1720U, PCI-1733, PCI-1734 PCI-1750, PCIE-1760, PCI-1760U, PCI-1761, USB-4702 | PCL-10137 | ADAM-3937 | | PCLD-785B |
| PCI-1784U | PCL-10137H | | | |
| PCI-1752U, PCI-1754, PCI-1756 PCIE-1752, PCIE-1754, PCIE-1756 | PCL-10250 PCL-101100M | ADAM-3951 | | |
| PCIE-1812, PCIE-1813 | PCL-101100R | ADAM-39100 | | PCLD-786 |
| PCI-1758UDI/1758UDO/1758UDIO | PCL-101100S | | | |
| PCI-1724U, PCI-1762 | PCL-10162 | ADAM-3962 | | |
| PCI-1737U PCI-1739U USB-4751/L | PCL-10150 | ADAM-3950, PCLD-782B PCLD-785B, PCLD-885 PCLD-7216 | | PCLD-788 |
| PCI-1714U/1714UL | PCL-10901 | ADAM-3909 | | |
| | PCL-1010B | | | |
| PCI-1757UP | PCL-10125 | ADAM-3925 | | |
| PCI-1747U, PCI-1721 PCI-1723, PCI-1780U | PCL-10168 | ADAM-3968 | | PCLD-885 |
| PCI-1735U | PCL-10120 PCL-10121 | PCL-10502+ PCL-10120, PCL-10121 PCL-10503+ PCL-10137, ADAM-3937 | | PCLD-7216 |
| PCI-1671UP, USB-4671 | PCL-10488 | | | |

Recommended Cables, I/O Wiring Terminal Boards, and Isolated Digital I/O Terminals for Connecting to PC/104 and PCI-104 DAQ Products

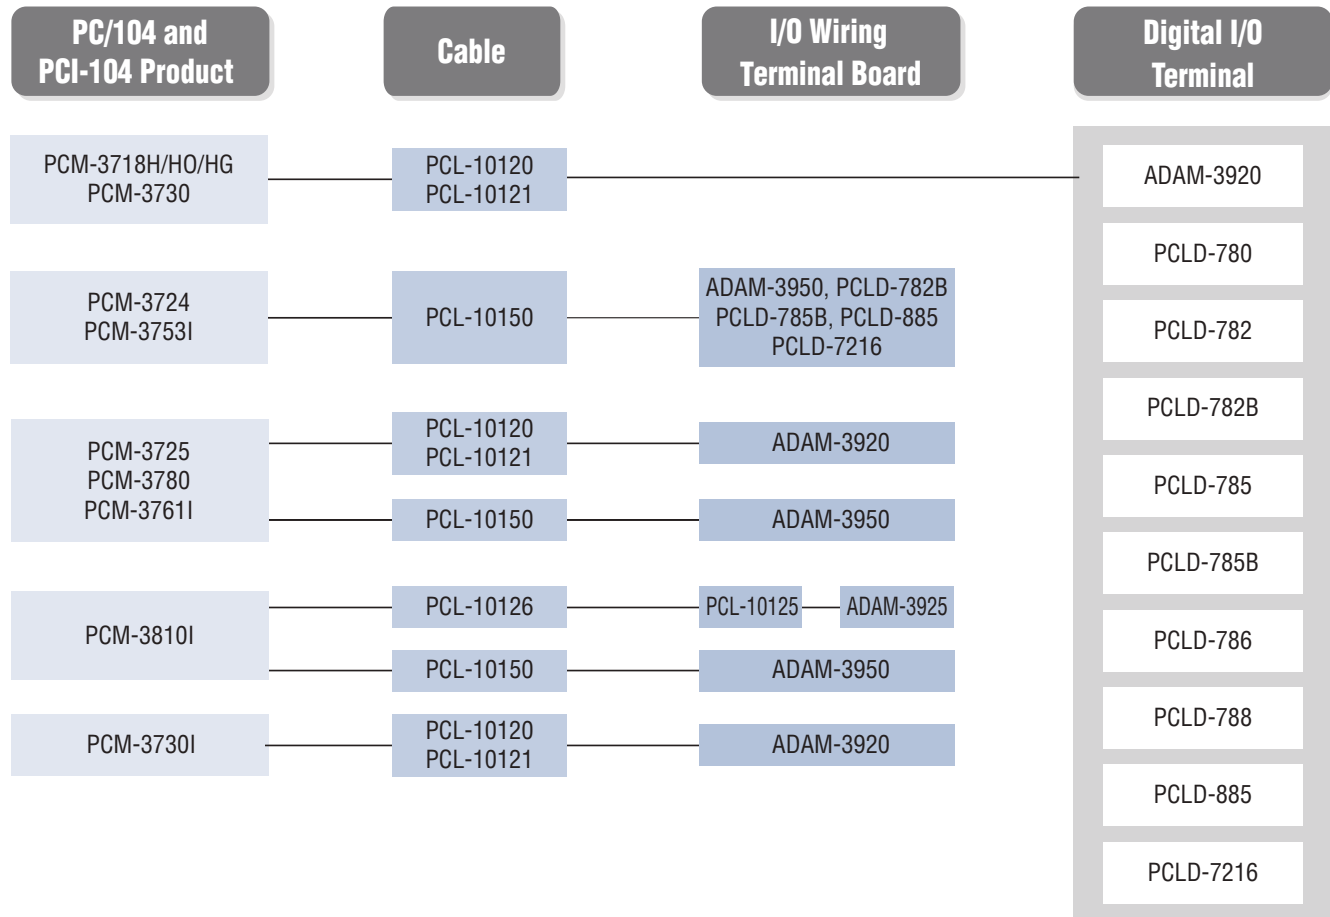

Cable Accessories

| Part Number | Description |
|----------------|-------------------------------------|
| PCL-1010B-1E | BNC to BNC wiring cable, 1 m |
| PCL-101100-1E | 100-pin SCSI high-speed cable, 1 m |
| PCL-101100R-1E | 100-pin SCSI shielded cable, 1 m |
| PCL-101100R-2E | 100-pin SCSI shielded cable, 2 m |
| PCL-101100S-1E | 100-pin mini SCSI cable, 1 m |
| PCL-101100S-2E | 100-pin mini SCSI cable, 2 m |
| PCL-101100S-3E | 100-pin mini SCSI cable, 3 m |
| PCL-101100M-3E | 100-pin SCSI shielded cable, 3 m |
| PCL-10120-0.4E | 20-pin flat cable, 0.4 m |
| PCL-10120-1E | 20-pin flat cable, 1 m |
| PCL-10120-2E | 20-pin flat cable, 2 m |
| PCL-10121-2E | 20-pin shielded cable, 2 m |
| PCL-10125-1E | DB25 cable, 1 m |
| PCL-10125-3E | DB25 cable, 3 m |
| PCL-10126-0.2E | 26-pin to DB25(f) flat cable, 0.2 m |
| PCL-10137-1E | DB37 cable, 1 m |
| PCL-10137-2E | DB37 cable, 2 m |
| PCL-10137-3E | DB37 cable, 3 m |
| PCL-10137H-1E | DB37 high-speed cable, 1 m |

| Part Number | Description |
|----------------|--|
| PCL-10137H-3E | DB37 high-speed cable, 3 m |
| PCL-10141-0.2E | 40-pin to DB37(f) flat cable, 0.2 m |
| PCL-10150-1.2E | 50-pin flat cable, 1.2 m |
| PCL-10162-1E | DB62 cable, 1 m |
| PCL-10162-3E | DB62 cable, 3 m |
| PCL-10168-1E | 68-pin SCSI shielded cable, 1 m |
| PCL-10168-2E | 68-pin SCSI shielded cable, 2 m |
| PCL-10168H-1E | 68-pin SCSI shielded cable with noise rejection, 1 m |
| PCL-10168H-2E | 68-pin SCSI shielded cable with noise rejection, 2 m |
| PCL-10250-1E | 100-pin SCSI to 2 x 50-pin SCSI cable, 1 m |
| PCL-10250-2E | 100-pin SCSI to 2 x 50-pin SCSI cable, 2 m |
| PCL-10268-1E | 100-pin SCSI to 2 x 68-pin SCSI cable, 1 m |
| PCL-10268-2E | 100-pin SCSI to 2 x 68-pin SCSI cable, 2 m |
| PCL-10488-2 | IEEE-488 cable, 2 m |
| PCL-10502-AE | Dual 20-pin to PC slot plate extender |
| PCL-10503-AE | Dual 20-pin to DB37 adapter |
| PCL-10901-3E | DB9 to PS/2 cable, 3 m |

DAQ-Embedded Computer Selection Guide



| Category | | Multifunction Platform | | | |
|-------------------|----------------------|---|---|---|---|
| CPU | | Intel Celeron 1047UE | Intel Core™ i3-3217UE | Intel Celeron 1047UE | Intel Core™ i3-3217UE |
| Memory | | DDR3 4GB | | | |
| Part Number | | MIC-1810-S4A1E | MIC-1810-S6A1E | MIC-1816-S4A1E | MIC-1816-S6A1E |
| Analog Input | Resolution | 12-bit | 12-bit | 16-bit | 16-bit |
| | Channels | 16 SE/8 diff. | 16 SE/8 diff. | 16 SE/8 diff. | 16 SE/8 diff. |
| | Onboard FIFO | 4,096 samples | 4,096 samples | 4,096 samples | 4,096 samples |
| | Sampling Rate | 500 kS/s | 500 kS/s | 1MSPS | 1MSPS |
| | Input Ranges | Unipolar Inputs | 0 ~ 10, 0 ~ 5, 0 ~ 2.5, 0 ~ 1.25 V | 0 ~ 10, 0 ~ 5, 0 ~ 2.5, 0 ~ 1.25 V | 0 ~ 10, 0 ~ 5, 0 ~ 2.5, 0 ~ 1.25 V |
| | | Bipolar Inputs | ±10, ±5, 2.5, 1.25, 0.625 V | ±10, ±5, 2.5, 1.25, 0.625 V | ±10, ±5, 2.5, 1.25, 0.625 V |
| | Trigger Modes | Configurable Per Channel | ✓ | ✓ | ✓ |
| | | Pacer/ Software/ External Pulse | ✓ | ✓ | ✓ |
| | | Analog Slope | ✓ | ✓ | ✓ |
| | Data Transfer Modes | Advanced Trigger | Start/Stop/Delayed Start/Delayed Stop | Start/Stop/Delayed Start/Delayed Stop | Start/Stop/Delayed Start/Delayed Stop |
| | | Software | ✓ | ✓ | ✓ |
| Analog Output | DMA | Bus mastering | Bus mastering | Bus mastering | Bus mastering |
| | | | | | |
| | Resolution | 12-bit | 12-bit | 16-bit | 16-bit |
| | Channels | 2 (waveform output) | 2 (waveform output) | 2 (waveform output) | 2 (waveform output) |
| | Onboard FIFO | 4,096 samples | 4,096 samples | 4,096 samples | 4,096 samples |
| | Output Range | 0 ~ 5, 0 ~ 10, ±5, ±10 V | 0 ~ 5, 0 ~ 10, ±5, ±10 V | 0 ~ 5, 0 ~ 10, ±5, ±10 V | 0 ~ 5, 0 ~ 10, ±5, ±10 V |
| Digital I/O | Output Rate | 500 kHz | 500 kHz | 3 MHz | 3 MHz |
| | DMA Transfer | Bus mastering | Bus mastering | Bus mastering | Bus mastering |
| Timer/Counter | Input Channels | 24 (shared) | 24 (shared) | 24 (shared) | 24 (shared) |
| | Output Channels | | | | |
| | | | | | |
| Legacy Driver | Channels | 2 | 2 | 2 | 2 |
| | Resolution | 32-bit | 32-bit | 32-bit | 32-bit |
| | Max. Input Frequency | 10 MHz | 10 MHz | 10 MHz | 10 MHz |
| DAQ/Analog Driver | Isolation Voltage | - | - | - | - |
| | Auto Calibration | ✓ | ✓ | ✓ | ✓ |
| | Board ID Switch | ✓ | ✓ | ✓ | ✓ |
| DAQ/Analog Driver | Dimensions (L x H) | 165 x 130 x 59 mm (6.49" x 5.12" x 2.32") | 165 x 130 x 59 mm (6.49" x 5.12" x 2.32") | 165 x 130 x 59 mm (6.49" x 5.12" x 2.32") | 165 x 130 x 59 mm (6.49" x 5.12" x 2.32") |
| | Windows XP/2000 | - | - | - | - |
| | WinCE | - | - | - | - |
| DAQ/Analog Driver | Linux | - | - | - | - |
| | Windows 7/8/10 | ✓ | ✓ | ✓ | ✓ |
| | WinCE | - | - | - | - |
| DAQ/Analog Driver | Linux | - | - | - | - |
| | LabVIEW Driver | ✓ | ✓ | ✓ | ✓ |

* 80 kHz on Pentium® 4-based (or higher) systems.

** SS: Single DMA channel, single A/D channel scan.

✓: supported, -: not supported, △: optional

Signal Conditioner Selection Guide



| Model | | ADAM-3011 | ADAM-3013 | ADAM-3014 |
|-------------|---------|--------------------------|----------------------------|---|
| Signal Type | | Thermocouple | RTD | DC input |
| Channel | | 1 | 1 | 1 |
| Input Type | Voltage | - | - | ± 10 mV, ± 50 mV, ± 100 mV, ± 0.5 V, ± 1 V, ± 5 V, ± 10 V, $0 \sim 10$ mV, $0 \sim 50$ mV, $0 \sim 100$ mV, $0 \sim 0.5$ V, $0 \sim 1$ V, $0 \sim 5$ V, $0 \sim 10$ V |
| | Current | - | - | $0 \sim 20$, ± 20 mA |
| | Others | J, K, T, E, S, R, B Type | Pt or Ni | - |
| Output | Voltage | $0 \sim 10$ V | $0 \sim 5$, $0 \sim 10$ V | $0 \sim 10$, ± 5 , ± 10 V |
| | Current | - | $0 \sim 20$ mA | - |



| Model | | ADAM-3016 | ADAM-3017 | ADAM-3112 | ADAM-3114 |
|-------------|---------|--|--|--|---|
| Signal Type | | Strain Gauge | IEPE input | AC/DC input | Current input |
| Channel | | 1 | 1 | 1 | 1 |
| Input Type | Voltage | ± 10 , ± 20 , ± 30 , ± 100 mV (electrical voltage) | $4 \sim 24$ V (IEPE sensor with up to 10 mA current source) | AC: $0 \sim 120$, $0 \sim 250$, $0 \sim 400$ V DC: $0 \sim 120$, $0 \sim 250$, $0 \sim 400$ V | - |
| | Current | - | - | - | AC: $0 \sim 5$ A _{rms} DC: $0 \sim 5$ A |
| | Others | - | - | - | - |
| Output | Voltage | $0 \sim 10$, ± 5 , ± 10 V | DC Couple: $4 \sim 24$ V AC Couple: ± 11 V | $0 \sim 5$ V _{DC} | $0 \sim 5$ V _{DC} |
| | Current | - | - | - | - |

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O Modules

8

Industrial I/O and Video Solutions

USB Digital I/O Module and USB Hub Selection Guide



| Category | | | USB 3.0 Isolated Digital I/O | | | | | |
|-----------------------------|-----------------------|--|---|---|---|---|---|---|
| Model | | | USB-5830-AE | USB-5856-AE | USB-5850-AE | USB-5855-AE | USB-5860-AE | USB-5862-AE |
| Isolated Digital I/O | Input | Channels | 16 | 32 | 16 | 32 | 8 | 16 |
| | | Input Range | Logic 0: 3 V max. Logic 1: 10 V min. (30 V max.) | Logic 0: 3 V max. Logic 1: 10 V min. (30 V max.) | Logic 0: 3 V max. Logic 1: 10 V min. (30 V max.) | Logic 0: 3 V max. Logic 1: 10 V min. (30 V max.) | Logic 0: 3 V max. Logic 1: 10 V min. (30 V max.) | Logic 0: 3 V max. Logic 1: 10 V min. (30 V max.) |
| | | Isolation Protection | 2,500 V _{DC} | 2,500 V _{DC} | 2,500 V _{DC} | 2,500 V _{DC} | 2,500 V _{DC} | 2,500 V _{DC} |
| | Output | Channels | 16 | 32 | - | - | - | - |
| | | Load Voltage | 5 ~ 40 V _{DC} | 5 ~ 40 V _{DC} | - | - | - | - |
| | | Load Current | 350mA/ch (sink) @ 25°C 250mA/ch (sink) @ 60°C | 350mA/ch (sink) @ 25°C 250mA/ch (sink) @ 60°C | - | - | - | - |
| | | Isolation Protection | 2,500 V _{DC} | 2,500 V _{DC} | - | - | - | - |
| | | Opto-Isolator Response Time | 100 μs | 100 μs | - | - | - | - |
| Relay Output | PhotoMOS SPST(Form A) | Channels | - | - | 8 | 16 | - | - |
| | | Load Voltage | - | - | 60V (AC peak or DC) | 60V (AC peak or DC) | - | - |
| | | Load Current | - | - | 1.2A/ch | 1.2A/ch | - | - |
| | | Isolation Protection | - | - | 1,500 V _{DC} | 1,500 V _{DC} | - | - |
| | | Response Time | - | - | Turn-on: 1 ms (typical) Turn-off: 0.6 ms (typical) | Turn-on: 1 ms (typical) Turn-off: 0.6 ms (typical) | - | - |
| | Relay Output Form A | Channels | - | - | - | - | 8 | 16 |
| | | Contact Rating (resistive) | - | - | - | - | 2A @ 250 V _{AC} , 2A @ 30 V _{DC} | 2A @ 250 V _{AC} , 2A @ 30 V _{DC} |
| | | Max. Switching Power | - | - | - | - | 500 VA, 60 W | 500 VA, 60 W |
| | | Max. Switching Voltage | - | - | - | - | 270 V _{AC} , 125 V _{DC} | 270 V _{AC} , 125 V _{DC} |
| | | Response Time | - | - | - | - | Operating time: 10 ms (max.) Release time: 5 ms (max.) | Operating time: 10 ms (max.) Release time: 5 ms (max.) |
| Dimensions | | 120 x 120 x 40 mm (4.72" x 4.72" x 1.57") | 168 x 120 x 40 mm (6.61" x 4.72" x 1.57") | 120 x 120 x 40 mm (4.72" x 4.72" x 1.57") | 168 x 120 x 40 mm (6.61" x 4.72" x 1.57") | 120 x 120 x 40 mm (4.72" x 4.72" x 1.57") | 168 x 120 x 40 mm (6.61" x 4.72" x 1.57") | |
| Board ID Switch | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| Operating Temperature | | 0 ~ 60 °C (32 ~ 140 °F) | | | | | | |
| Supported Operating Systems | | Windows XP/7/8/10 and Linux | | | | | | |

✓: supported, -: not supported, △: optional



| Category | | USB 2.0 Digital I/O | | | |
|-----------------------------|----------------------------|--|--|---|---|
| Model | | USB-4750-AE | USB-4751-AE | USB-4751L-AE | USB-4761-AE |
| DI/O | Input | Channels | 16 | 48 (Shared) | 24 (Shared) |
| | | Input Range | Logic 0: 2 V max. Logic 1: 5 V min. (60 V max.) | Logic 0: 0.8 V max. Logic 1: 2 V min. (5 V/TTL) | Logic 0: 0.8 V max. Logic 1: 2 V min. (5 V/TTL) |
| | | Isolation Protection | 2,500 V _{DC} | - | - |
| | Output | Channels | 16 | 48 (Shared) | 24 (Shared) |
| | | Load Voltage | 5 ~ 40 V _{DC} | Logic 0: 0.5 V max. Logic 1: 3.8 V min | Logic 0: 0.5 V max. Logic 1: 3.8 V min |
| | | Load Current | 200mA/ch (sink) | Sink: 12 mA @ 0.5 V Source: 5 mA @ 3.8 V for all channels in high status | Sink: 12 mA @ 0.5 V Source: 5 mA @ 3.8 V for all channels in high status |
| | | Isolation Protection | 2,500 V _{DC} | - | - |
| | | Opto-Isolator Response Time | 100 μs | - | - |
| Relay Output | Channels | - | - | - | 8 x Form C |
| | Contact Rating (resistive) | - | - | - | 0.25A@250V _{AC} , 1A@30V _{DC} |
| | Max. Switching Power | - | - | - | 62.5 VA, 60 W |
| | Max. Switching Voltage | - | - | - | 250 V _{AC} , 220 V _{DC} |
| | Response Time | - | - | - | Operating time: 6 ms (max.) Release time: 4 ms (max.) |
| Counter | Channels | 2 | 2 | 2 | - |
| | Isolation Protection | 2,500 V _{DC} | - | - | - |
| | Max. Input Frequency | 1 MHz | 8 MHz | 8 MHz | - |
| Dimensions | | 132 x 80 x 32 mm (5.2" x 3.15" x 1.26") | 132 x 80 x 32 mm (5.2" x 3.15" x 1.26") | 132 x 80 x 32 mm (5.2" x 3.15" x 1.26") | 132 x 80 x 32 mm (5.2" x 3.15" x 1.26") |
| Supported Operating Systems | | Windows XP/7/8/10 and Linux | | | |



| Category | | Industrial USB Hub | | |
|----------------------|-----------------------|--|--|--|
| Model | | USB-4620-AE | USB-4622-BE | USB-4630-AE |
| Connectivity | Ports | 1 x Upstream (Type B) 5 x Downstream (Type A) | 1 x Upstream (Type B) 5 x Downstream (Type A) | 1 x Upstream (Type B) 4 x Downstream (Type A) |
| | Compatibility | USB 2.0 Full Speed | USB 2.0 High Speed | USB 3.0 SuperSpeed |
| | Transfer Speed | 12 Mbps | 480 Mbps | 5 Gbps shared by all downstream ports |
| | Supply Current | 500 mA max. per port | 500 mA max. per port | External power: 900 mA max. per port USB bus power: 700 mA max. shared by all ports |
| Isolation Protection | | 3,000 V _{DC} | - | 2,500 V _{DC} |
| General | Dimensions | 132 x 80 x 32 mm (5.2" x 3.15" x 1.26") | | |
| | DC Input | 10 ~ 30 V _{DC} | | |
| | Operating Temperature | 0 ~ 60°C (32 ~ 140°F) | 0 ~ 60°C (32 ~ 140°F) | 0 ~ 70°C (32 ~ 158°F) |

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O Modules

8

Industrial I/O and Video Solutions

Multifunction DAQ USB Module Selection Guide



| Category | | USB 2.0 Multifunction | | | | |
|-----------------------------|----------------------|-------------------------------|---|---|---|--|
| Part Number | | USB-4702-AE | USB-4704-AE | USB-4711A-AE | USB-4716-AE | USB-4718 |
| Analog Input | Resolution | 12-bit | 14-bit | 12-bit | 16-bit | 16-bit |
| | Channels | 8 SE/4 diff. | 8 SE/4 diff. | 16 SE/8 diff. | 16 SE/8 diff. | 8 diff. |
| | Onboard FIFO | 512 samples | 512 samples | 1,024 samples | 1,024 samples | - |
| | Sampling Rate | 10 kS/s | 48 kS/s | 150 kS/s | 200 kS/s | 10 S/s |
| | Input Ranges | - | | | | 0 ~ 20, 4 ~ 20 mA Thermocouple J, K, T, E, R, S, B 0 ~ 1, 0 ~ 2.5, 0 ~ 0.015, 0 ~ 0.05, 0 ~ 0.1, 0 ~ 0.5 V |
| | | - | | | | 0 ~ 10, 0 ~ 5, 0 ~ 2.5, 0 ~ 1.25 V |
| | | - | | | | 0 ~ 10, 0 ~ 5, 0 ~ 2.5, 0 ~ 1.25 V |
| | Trigger Modes | ±20, 10, 5, 4, 2.5, 1.25, 1 V | ±20, 10, 5, 4, 2.5, 1.25, 1 V | ±10, 5, 2.5, 1.25 V 0.625 V | ±10, 5, 2.5, 1.25 V 0.625 V | - |
| | | ✓ | ✓ | ✓ | ✓ | ✓ |
| | | ✓ | ✓ | ✓ | ✓ | ✓ |
| Analog Output | Resolution | 12-bit | 12-bit | 12-bit | 16-bit | - |
| | Channels | 2 | 2 | 2 | 2 | - |
| | Output Range | 0 ~ 5 V | 0 ~ 5, 0 ~ 10 V | 0 ~ 5, 0 ~ 10, ±5, ±10 V | 0 ~ 5, 0 ~ 10, ±5, ±10 V | - |
| | Output Rate | Static update | Static update | Static update | Static update | - |
| Digital I/O | Input Channels | 8 | 8 | 8 | 8 | 8 (isolated) |
| | Output Channels | 8 | 8 | 8 | 8 | 8 (isolated) |
| Timer/Counter | Channels | 1 | 1 | 1 | 1 | - |
| | Resolution | 32-bit | 16-bit | 16-bit | 16-bit | - |
| | Max. Input Frequency | 5 MHz | 10 MHz | 1 KHz | 1 KHz | - |
| Auto Calibration | | ✓ | ✓ | ✓ | ✓ | - |
| Dimensions (L x H) | | 70 x 70 mm (2.76" x 2.76") | 132 x 80 x 32 mm (5.2" x 3.15" x 1.26") | 132 x 80 x 32 mm (5.2" x 3.15" x 1.26") | 132 x 80 x 32 mm (5.2" x 3.15" x 1.26") | 132 x 80 x 32 mm (5.2" x 3.15" x 1.26") |
| Connector | | DB37 | Onboard screw terminal | Onboard screw terminal | Onboard screw terminal | Onboard screw terminal |
| Supported Operating Systems | | Windows XP/7/8/10 and Linux | | | | |
| LabVIEW Driver | | ✓ | ✓ | ✓ | ✓ | ✓ |

✓: supported, -: not supported, △: optional

Serial Communication Card Selection Guide

Serial Communication Cards

NEW



| Bus | | PCI Express | | | | | | | | |
|--------------------------|-----------|-----------------------------|-----------------------|-----------------------|-----------|-----------------------|-----------------------|----------|-----------------------|----------------------------|
| Part Number | | PCI-1602 | PCI-1602UP | PCI-1604 | PCI-1604L | PCI-1610 | PCI-1612 | PCI-1620 | PCI-1622 | PCI-1680U |
| I/O Ports | | 2 | 2 | 2 | 2 | 4 | 4 | 8 | 8 | 2 |
| Communication Interfaces | RS-232 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | - |
| | RS-422 | ✓ | ✓ | - | - | - | ✓ | - | ✓ | - |
| | RS-485 | ✓ | ✓ | - | - | - | ✓ | - | ✓ | - |
| | CAN | - | - | - | - | - | - | - | - | ✓ |
| Drivers | | Windows XP/7/8/10 and Linux | | | | | | | | |
| Protection | ESD | 15 kV (air), 8 kV (contact) | | | | | | | | 8 kV (air), 4 kV (contact) |
| | Isolation | 3,000 V _{DC} | 2,500 V _{DC} | 3,000 V _{DC} | - | 3,000 V _{DC} | 3,000 V _{DC} | - | 3,000 V _{DC} | 1,000 V _{DC} |



| Bus | | PCI Express | | | | | | |
|--------------------------|-----------|-----------------------------|-----------------------|-----------|-----------------------|-----------|-----------------------|-----------------------|
| Part Number | | PCIE-1602 | PCIE-1604 | PCIE-1610 | PCIE-1612 | PCIE-1620 | PCIE-1622 | PCIE-1680 |
| I/O Ports | | 2 | 2 | 4 | 4 | 8 | 8 | 2 |
| Communication Interfaces | RS-232 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | - |
| | RS-422 | ✓ | - | - | ✓ | - | ✓ | - |
| | RS-485 | ✓ | - | - | ✓ | - | ✓ | - |
| | CAN | - | - | - | - | - | - | ✓ |
| Drivers | | Windows XP/7/8/10 and Linux | | | | | | |
| Protection | ESD | 15 kV (air), 8 kV (contact) | | | | | | |
| | Isolation | 3,000 V _{DC} | 3,000 V _{DC} | - | 3,000 V _{DC} | - | 3,000 V _{DC} | 2,500 V _{DC} |

✓: supported, -: not supported, △: optional

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O Modules

8

Industrial I/O and Video Solutions

Serial Communication Card Selection Guide

PC/104 Communication Modules



| Bus | | PC/104 | | | | | | |
|--------------------------|-----------|----------------------------|----------|-----------------------|----------|----------|----------|----------|
| Part Number | | PCM-3680 | PCM-3660 | PCM-3610 | PCM-3612 | PCM-3614 | PCM-3618 | PCM-3641 |
| I/O Ports | | 2 | 2 | 2 | 2 | 4 | 8 | 4 |
| Communication Interfaces | Ethernet | - | ✓ | - | - | - | - | - |
| | RS-232 | - | - | ✓ | - | - | - | ✓ |
| | RS-422 | - | - | ✓ | ✓ | ✓ | ✓ | - |
| | RS-485 | - | - | ✓ | ✓ | ✓ | ✓ | - |
| | CAN | ✓ | - | - | - | - | - | - |
| Protection | ESD | 8 kV (air), 4 kV (contact) | | | | | | |
| | Isolation | 2,500 V _{DC} | - | 2,500 V _{DC} | - | - | - | - |

PCI-104 Communication Modules



| Bus | | PCI-104 | |
|--------------------------|--------------|----------------------------|-----------------------------|
| Part Number | | PCM-3680I | PCM-3612I |
| I/O Ports | | 2 | 4 |
| Communication Interfaces | Current Loop | - | - |
| | RS-232 | - | V |
| | RS-422 | - | V |
| | RS-485 | - | V |
| | CAN | V | - |
| Protection | ESD | 8 kV (air), 4 kV (contact) | 15 kV (air), 8 kV (contact) |
| | Isolation | 2,500 V _{DC} | - |

| Bus | | MIOe PCI Express | |
|-------------|--|-----------------------|--------------------------------------|
| Part Number | | MIOe-3680-AE | MIOe-3674-AE |
| Protocol | | CAN 2.0 A/B | 802.3af (PoE) |
| Ports | | 2 | 4 Gigabit Ethernet MAC and PHY ports |
| Protection | | 2,500 V _{DC} | ESD 8 kV, EFT 2 kV |

Accessories



| Part Number | | 1700018791 | OPT4A | OPT8C | OPT8H | OPT8J |
|--------------------------|----------------|--|--|--|--|-----------------------|
| Length | | 30 cm | 30 cm | 1 m | 1 m | 1 m |
| Communication Interfaces | Connector Type | DB37 Male | DB37 Male | DB62 Male | DB62 Male | DB78 |
| | Qty | 1 | 1 | 1 | 1 | 1 |
| | Connector Type | DB25 Male | DB9 Male | DB25 Male | DB9 Male | DB9 Male |
| | Qty | 4 | 4 | 8 | 8 | 8 |
| Applications | | PCI-1610B, PCI-1610C, PCI-1612B, PCI-1612C, PCIE-1610B, PCIE-1612B, PCIE-1612C | PCI-1610B, PCI-1610C, PCI-1612B, PCI-1612C, PCIE-1610B, PCIE-1612B, PCIE-1612C | PCI-1620A, PCI-1620B, PCIE-1620A, PCIE-1622B | PCI-1620A, PCI-1620B, PCIE-1620A, PCIE-1622B | PCI-1622C, PCIE-1622C |

✓ : supported, - : not supported, △ : optional

Intelligent Video Solution

Innovative Video Platform with Intelligent Video Analytics

Advantech offers an extensive range of video products, including video capture cards (PCIe, mini PCIe, and M.2) and industrial-grade video processing systems, to meet various market needs. From lecture recording to medical imaging, event broadcasting, live video streaming, and 24-hour surveillance, Advantech's intelligent video platforms are capable of supporting diverse video-related applications. These integrated hardware and software solutions are also pre-installed with intelligent video analysis software and equipped with a powerful software development kit that enables developers to more efficiently implement unique application software, thereby shortening overall development time.





**Completed
Architecture**



**Efficient
Development**



**Professional
Service**



**Multiple Applications
Supported**



**Stability
Performance**



**High-Efficiency
Video Coding**



**High
Compatibility**

Medical Imaging



Advantech's video capture cards are designed to deliver precise imaging for medical applications. The inclusion of a powerful software development kit and support for various programming languages allows system integrators to easily develop unique applications.

Video Recording/Streaming



Advantech's video capture cards also support video streaming, specifically multi-stream channel recording and file exporting/merging. This allows hospitals to record and stream video in various formats for medical education and training.

Multi-Platform Broadcasting



Equipped with transcoding and multi-streaming protocols, Advantech's video card solutions can be used to broadcast multimedia content to a wide variety of client devices and facilitate multi-platform streaming operations.

Video Surveillance



Advantech provides a full range of capture card solutions for the video surveillance market. These high-performance cards support diverse video output interfaces to enable flexible support for diverse applications.

1

Software and Industry
Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and
Monitors

5

Automation Computers
and Controllers

6

Industrial
Communication

7

Remote I/O Modules

8

Industrial I/O and
Video Solutions

NEW

NEW

NEW

NEW

NEW



| Model Name | | DVP-7033HE | DVP-7035HE | DVP-7635HE | DVP-7011MHE | DVP-7012MHE | DVP-7011UHE |
|-------------------------|---------------------------|---|---|---|---|---|---|
| Video | Compression | SW H.264 | S/W H.264 | H/W H.264 | S/W H.264 | S/W H.264 | S/W H.264 |
| | Channels | 4 | 4 | 4 | 1 | 1 | 1 |
| | Host Interface | PCIe x4 (Gen2) | PCIe x4 (Gen2) | PCIe x 4 | PCIeM.2 | PCIeM.2 | PCIe x 4 |
| | Input Interface | 3G-SDI/HD-SDI/SDI | TVI/CVI/AHD/Composite (CVBS) | TVI/CVI/AHD/Composite (CVBS) | HDMI/DVI/VGA/YpPr | SDI | HDMI 2.0 |
| | Max. Display Resolution | 1920 x 1080 @ 60/50 | 1920 x 1080p @ 30/25 | 1920 x 1080p @ 30/25 | 1920 x 1080p @ 30/25 | 1920 x 1080p @ 30/25 | 4096 x 2160p @ 60/50 |
| | Max. Recording Resolution | 1920 x 1080 @ 60/50 | 1920 x 1080p @ 30/25 | 1920 x 1080p @ 30/25 | 1920 x 1080p @ 30/25 | 1920 x 1080p @ 30/25 | 4096 x 2160p @ 60/50 |
| | Max. Display Rate | 60/50 fps (NTSC/PAL) | 30/25 fps (NTSC/PAL) | 30/25 fps (NTSC/PAL) | 30/25 fps (NTSC/PAL) | 30/25 fps (NTSC/PAL) | 60/50 fps (NTSC/PAL) |
| | Max. Recording Rate | 60/50 fps (NTSC/PAL) | 30/25 fps (NTSC/PAL) | 30/25 fps (NTSC/PAL) | 30/25 fps (NTSC/PAL) | 30/25 fps (NTSC/PAL) | 60/50 fps (NTSC/PAL) |
| | Video Outputs | - | - | - | - | SDI x 1 (Loop through) | - |
| Audio | Audio Inputs | 4 x SDI + 2 x 3.5mm Audio | 2 x 3.5mm Audio | - | 1 x HDMI / Audio (L/R) | 1 x SDI / Audio (L/R) | HDMI/SDI/ Audio (L/R) |
| | Format | Stereo, 16-bit, 32 ~ 48 kHz | Stereo, 16-bit, 32 ~ 48 kHz | Stereo, 16-bit, 32 ~ 48 kHz | Stereo, 16-bit, 32 ~ 48 kHz | Stereo, 16-bit, 32 ~ 48 kHz | Stereo, 16-bit, 32 ~ 48 kHz |
| Watchdog | | Yes | - | Yes | - | - | Yes |
| Physical Characteristic | Operating Temperature | -20 ~ 70 °C (-4 ~ 158 °F) | -20 ~ 70 °C (-4 ~ 158 °F) | -20 ~ 70 °C (-4 ~ 158 °F) | -20 ~ 70 °C (-4 ~ 158 °F) | -20 ~ 70 °C (-4 ~ 158 °F) | -20 ~ 70 °C (-4 ~ 158 °F) |
| | Storing Temperature | -40 ~ 85 °C (-40 ~ 185 °F) | -40 ~ 85 °C (-40 ~ 185 °F) | -40 ~ 85 °C (-40 ~ 185 °F) | -40 ~ 85 °C (-40 ~ 185 °F) | -40 ~ 85 °C (-40 ~ 185 °F) | -40 ~ 85 °C (-40 ~ 185 °F) |
| | Dimensions (W x H x D) | 140 x 101 mm (5.51" x 3.97") | 128 x 101mm (5.03" x 3.97") PCIe Full Height | 150 x 101 mm (5.9" x 3.97") | 22 x 60 mm (0.86" x 2.36") M.2 Type B/M | 22 x 60 mm (0.86" x 2.36") M.2 Type B/M | 145 x 69 mm (5.7" x 2.71") PCIe Low profile |
| | Safety | CE/FCC | CE/FCC | CE/FCC | CE/FCC | CE/FCC | CE/FCC |
| Operating System | Operating System | Windows XP/XPe/Vista/7/Win8/Win8.1/Win10; Linux 2.6.14 or higher; 32/64-bit | Windows XP/XPe/Vista/7/Win8/Win8.1/Win10; Linux 2.6.14 or higher; 32/64-bit | Windows XP/XPe/Vista/7/Win8/Win8.1/Win10; Linux 2.6.14 or higher; 32/64-bit | Windows XP/XPe/Vista/7/Win8/Win8.1/Win10; Linux 2.6.14 or higher; 32/64-bit | Windows XP/XPe/Vista/7/Win8/Win8.1/Win10; Linux 2.6.14 or higher; 32/64-bit | Windows XP/XPe/Vista/7/Win8/Win8.1/Win10; Linux 2.6.14 or higher; 32/64-bit |

1

Software and Industry Solutions

2

Industrial Server

3

Intelligent System

4

Intelligent HMI and Monitors

5

Automation Computers and Controllers

6

Industrial Communication

7

Remote I/O Modules

8

Industrial I/O and Video Solutions

[illegible]

Advantech Headquarters

No. 1, Alley 20, Lane 26, Rueiguang Road, Neihs District, Taipei, Taiwan 11491

Tel: 886-2-2792-7818 Fax: 886-2-2794-7301 www.advantech.com

Greater China

● **Regional Service Center, China**
Advantech Plus Technology Campus
www.advantech.com.cn
No. 600, Han-Pu Road, Yu-Shan
Kunshan, Jiangsu, China
Tel: 86-512-5777-5666

● **Advantech China**
800-810-0345/800-810-8389
Email: sales@advantech.com.cn

Beijing Office

6th Street No. 7, Shang Di Zone,
Hai-Dian Dist., Beijing, China
Tel: 86-10-6298-4346

Shanghai Office

136# Jiangchang Three Road Zhabei
Dist., Shanghai, China
Tel: 86-21-3632-1616

Shenzhen Office

4F, NO.28, Keji South Road 12th, NanShan
Dist.,
Shenzhen, China
Tel: 800-810-0345

Xi An Office

Room 301, Xi an Software Park Qinfengge,
NO.68 Keji 2nd Road, High-tech District, Xi
An
Tel: 86-29-8766-9933

Hong Kong Office

Room 1601, 16/F., Westin Centre, 26 Hung To
Road, Kwun Tong, Kowloon, Hong Kong
Tel: 852-2720-5118
● Email: infohk@advantech.com

Regional Service Center, Taiwan

Taipei Manufacturing Center
7F, No.1, Lane 169, Kang-Ning Street,
Sheji City, Taipei, Taiwan
Tel: 886-2-2692-6076

Linkou IoT Campus

No. 27, Wende Road, Guishan Dist.,
Taoyuan City, 33371, Taiwan
● Tel: 886-2-2792-7818

Advantech Taiwan

0800-777-111
Email: sales@advantech.com.tw
www.advantech.tw

Taipei Neihs Office

No. 1, Alley 20, Lane 26, Rueiguang Road,
Neihs Dist., Taipei, 11491, Taiwan
Tel: 886-2-2792-7818

Hsinchu Office

2F, No.32, Chenggong 3th St., Zhubei City,
Hsinchu County 30264, Taiwan
Tel: 886-3-667-0839

Taichung Office

6F-5, No.633, Sec. 2, Taiwan Blvd., Xitun Dist.,
Taichung City, 40759, Taiwan
Tel: 886-4-2329-0371

Kaohsiung Office

21F, A1, No. 502, Jiuru 1st Rd., Sanmin Dist.,
Kaohsiung City 80765, Taiwan
Tel: 886-7-392-3600

Asia

● **Advantech Japan**
0800-500-1055
Email: ajp_sales@advantech.com
www.advantech.co.jp

Tokyo Office

6-16-3, Asakusa Taito-Ku, Tokyo 111-0032,
Japan
Tel: 81-3-6802-1021

Osaka Office

Minami-Senba M21 Bldg 6F, 1-10-20 Minami
Senba, Chuo-Ku, Osaka, 542-0081 Japan
Tel: 81-6-5267-1887

Nagoya Office

Showa Building 9F, 4-3-26 Sakae, Naka-ku
Nagoya City, Aichi 460-0008, Japan

Advantech Korea

080-363-9494
Email: pros@advantech.co.kr
www.advantech.co.kr
#1202 Ace Techno Tower, 684-1 Deungchon-
3dong, Gangseo-gu, Seoul 07573, Korea
Tel: 82-2-3663-9494

Advantech Singapore

Email: sg@advantech.com
www.advantechsg.com.sg
6 Serangoon North Ave 5, #03-08 East
Lobby, Singapore 554910
Tel: 65-6442-1000

Advantech Malaysia

Email: sales@advantech.com.my
www.advantech.com.my

Kuala Lumpur Office

L3-03 / 03A, Wisma BUB, No 11,
Lebuh Bandar Utama, Bandar Utama, 47800
Petaling Jaya, Selangor Darul Ehsan, Malaysia
Tel: 60-3-7725-4188

Penang Office

No.117 & 119 Ground Floor, Jalan Perniagaan
Gemilang 1, Pusat Perniagaan Gemilang,
14000 Bukit Mertajam, Penang
Tel: 60-4-537-9188

Advantech Thailand

Email: sales.th@advantech.com
www.advantech.co.th
65/213 Unit 5 and 7, 25th Floor
Channanphenjati Business Center, Rama 9
Road, Huaykwang, Huaykwang, Bangkok
10310, Thailand
● Tel: 66-02-2488306-9

Advantech Vietnam Technology., JSC

Email: sales.AVN@advantech.com
12A Floor VTC Online building, no.18 Tam
Trinh, Hai Ba Trung dist., Hanoi, Vietnam
● Tel: 84-24-3399-1155

Advantech Indonesia

Email: aid.ccs@advantech.com
www.advantech.co.id
Plaza Aminta 6th Floor Suite 601
Jl. TB Simatupang Kav 10
Jakarta Selatan 12310, Indonesia
● Tel : 62-21-751-1930/39

Advantech Australia

1300-308-531
Email: info@advantech.net.au
www.advantech.net.au
20-22 Smeaton Avenue Dandenong South VIC
3175, Australia
● Tel: 61-3-9797-0100

Advantech India

Bangalore Office
#79/2, City Centre, outer ring road, Ballari
Opposite Hebbal Bus Depot, Bengaluru-560024,
India
Tel: 91-80-2545-0206
Toll Free: 1-800-425-5071
Email: info.in@advantech.com

Pune Office

Office No. 104, The Core, NIBM chowk, NIBM
Rd, Kondhwa, Pune, Maharashtra 411048, India
Tel: 91-94226-02349
Toll Free: 1-800-425-5070
Email: buy.in@advantech.com

Europe

● **Advantech Europe B.V.**
00800-2426-8080/81
Email: customercare@advantech.eu
www.advantech.eu

Regional Service Center, Europe

Ekkersrijt 5708 Science Park,
Eindhoven 5692 ER Son, The Netherlands
Tel: 31-40-267-7000

Europe Technical Service/R&D Center

Fuggerstr. 9, 92224 Amberg, Germany
Tel: 49-9621-9732-100
Email: customerservice.aeu@advantech.com

Europe Repair Service Center

ul. Dzialkowa 121B, 02-234 Warsaw, Poland
Tel: 48-22-31-51-100
Email: rma@advantech.pl

Advantech Netherlands

Eindhoven Office
Ekkersrijt 5708 Science Park,
Eindhoven 5692 ER Son, The Netherlands
Tel: 31-40-267-7000

Breda Office

Bijster 20A, 4817 HX Breda, The Netherlands
Tel: 31-76-523-3100

Advantech Germany

Munich Office
Indusriestr. 15, 82110 Germering, Germany
Tel: 49-89-12599-0

Düsseldorf Office

Hochdahl Str. 14, 40724 Hilden, Germany
Tel.: 49-2103-97-885-0

Advantech France

Paris Office
1 Bld Charles de Gaulle Noblet hall C (entrée
rue du débarcadère) 92700 Colombes, France
Tel: 33-1-4119-4666

Advantech Italy

Milan Office
Via Roma, 74, 20060 Cassina de' Pecchi,
Milan, Italy
Tel: 39-02-9544-961

Advantech UK

London Office
Unit 3 Gunney Terrace, Duke of Wellington
Avenue, Royal Arsenal, Woolwich, London,
SE18 6SW, United Kingdom
Tel: 44-0-870-493-1433

Newcastle Office

Innocore House, Kingfisher Way,
Silverlink Business Park, North Shields,
NE28 9NX, United Kingdom
Tel: 44-0-191-262-4844

Advantech Spain

Madrid Office
Fangaloka Co-Working Center Pza del Sol 31,
Of. 11 28938 Mostoles – Madrid, Spain
Tel: 34-91-668-86-76

Advantech Sweden

Stockholm Office
Österögatan 1, SE-164 40 Kista, Sweden
Tel: 46-722-293423

Advantech Russia

www.advantech.ru

Moscow Office

115184 Москва, Большой Ордынский
перулок, д.4, стр.2, офис 102
Tel: 7-495-644-0364
Toll Free: 8-800-555-01-50
Email: info@advantech.ru

St. Petersburg Office

БЦ "Jensen House", 2 этаж, 3-я линия,
62литА, Санкт-Петербург, Россия, 199178
Tel: 7-812-332-5727
Toll Free: 8-800-555-81-20
Email: ARU.embedded@advantech.com

Advantech B+B SmartWorx Czech

Sokolská 71, 562 04 Ústí nad Orlicí,
Czech Republic
Tel: 420-465-521-020
Email: sales@conel.cz

Advantech B+B SmartWorx Ireland

Westlink Commercial Park, Oranmore, Co.
Galway, Ireland
Tel: 353-91-792444
Email: info@bb-smartworx.com

Americas

● **Regional Service Center, N. America**
380 Fairview Way Milpitas, CA 95035, USA
Tel: 1-408-519-3800

● **Advantech North America**
1-888-576-9668
www.advantech.com

Ohio (Cincinnati) Office

11380 Reed Hartman Highway
Cincinnati, OH 45241, USA
Tel: 1-513-742-8895
Toll Free: 1-800-800-6889
RMA/Tech Support: 1-877-451-6868
Email: info@advantech.com

Northern California (Milpitas) Office

380 Fairview Way, Milpitas, CA 95035, USA
Tel: 1-408-519-3898
Toll free: 1-888-576-9668
Email: buy@advantech.com

Southern California (Irvine) Office

13 Whatney, Irvine, CA 92618, USA
Tel: 949-420-2500
Toll Free: 1-800-866-6008
Toll Free: 1-800-557-6813
Email: ECGinfo@advantech.com
Email: CTinfo@advantech.com

Advantech B+B SmartWorx

PO Box 1040, 707 Dayton Road,
Ottawa IL 61350
Tel: 815-434-8731
Toll Free: 800-346-3119
Email: info@bb-smartworx.com

Advantech South America

Mexico Office
Ave. Baja California #245 Int. 704Col.
Hipódromo CondesaDelegación
Cauahémoc 06100, México DF. México
Tel: 52-55-6275-2727
Toll Free: 1-800-467-2415

Advantech Brazil

0800-770-5355
Email: vendas@advantech.com.br

Regional Service Center, Brazil

Rua Dr. Hoffman, 281, Morro chic, Itajuba,
37500-086, Minas Gerais, Brazil
Tel: 55-35-3623-5949

São Paulo Office

Rua Fagundes Filho, 134 - 12º floor - Cj 121,
Vila Monte Alegre, 04304-010, São Paulo,
Brazil
Tel: 55-11-5592-5367

Middle East and Africa

● **Advantech Israel**
Hamatechet 8, Industrial Zone
Kadima-Zoran, Israel
Tel: 072-2410527
Email: info@advantech.il

Mission
Enabling an Intelligent Planet

Growth Model
Segmented Business Units
Powered by Global Trusted Brand

Focus & Goal
The Global Leader of
Embedded & Automation Solutions
for iWorld System Integrators

www.advantech.com

Regional Service & Customization Centers

| | | | | |
|--|---|--|---|---|
| China Kunshan 86-512-5777-5666 | Taiwan Taipei 886-2-2792-7818 | Netherlands Eindhoven 31-40-267-7000 | Poland Warsaw 00800-2426-8080 | USA Milpitas, CA 1-408-519-3898 |
|--|---|--|---|---|

Worldwide Offices

Greater China

| | |
|--------------|------------------|
| China | |
| Toll Free | 800-810-0345 |
| Beijing | 86-10-6298-4346 |
| Shanghai | 86-21-3632-1616 |
| Shenzhen | 86-755-8212-4222 |
| Chengdu | 86-28-8545-0198 |
| Hong Kong | 852-2720-5118 |

| | |
|---------------------|-----------------|
| Taiwan | |
| Toll Free | 0800-777-111 |
| Taipei & IoT Campus | 886-2-2792-7818 |
| Taichung | 886-4-2329-0371 |
| Kaohsiung | 886-7-229-3600 |

Middle East and Africa

| | |
|--------|-------------|
| Israel | 072-2410527 |
|--------|-------------|

Asia

| | |
|--------------|------------------|
| Japan | |
| Toll Free | 0800-500-1055 |
| Tokyo | 81-3-6802-1021 |
| Osaka | 81-6-6267-1887 |
| Nagoya | 81-0800-500-1055 |

| | |
|--------------|----------------|
| Korea | |
| Toll Free | 080-363-9494 |
| Seoul | 82-2-3663-9494 |

| | |
|------------------|--------------|
| Singapore | |
| Singapore | 65-6442-1000 |

| | |
|-----------------|----------------|
| Malaysia | |
| Kuala Lumpur | 60-3-7725-4188 |
| Penang | 60-4-537-9188 |

| | |
|-----------------|-----------------|
| Thailand | |
| Bangkok | 66-02-2488306-9 |

| | |
|----------------|-----------------|
| Vietnam | |
| Hanoi | 84-24-3399-1155 |

| | |
|------------------|----------------|
| Indonesia | |
| Jakarta | 62-21-751-1939 |

| | |
|------------------|----------------|
| Australia | |
| Toll Free | 1300-308-531 |
| Melbourne | 61-3-9797-0100 |

| | |
|--------------|-----------------|
| India | |
| Bangalore | 91-80-2545-0206 |
| Pune | 91-94-2260-2349 |

Europe

| | |
|----------------|--------------------|
| Germany | |
| Toll Free | 00800-2426-8080/81 |
| Munich | 49-89-12599-0 |
| Düsseldorf | 49-2103-97-855-0 |

| | |
|---------------|----------------|
| France | |
| Paris | 33-1-4119-4666 |

| | |
|--------------|----------------|
| Italy | |
| Milano | 39-02-9544-961 |

| | |
|------------------------------|----------------|
| Benelux & Nordics | |
| Eindhoven | 31-40-267-7000 |
| Breda | 31-76-523-3100 |

| | |
|-----------|-------------------|
| UK | |
| Newcastle | 44-0-191-262-4844 |
| London | 44-0-870-493-1433 |

| | |
|---------------|-----------------|
| Poland | |
| Warsaw | 48-22-31-51-100 |

| | |
|----------------|-----------------|
| Russia | |
| Moscow | 8-800-555-01-50 |
| St. Petersburg | 8-800-555-81-20 |

| | |
|-----------------------|-----------------|
| Czech Republic | |
| Ústí nad Orlicí | 420-465-521-020 |

| | |
|----------------|---------------|
| Ireland | |
| Oranmore | 353-91-792444 |

Americas

| | |
|----------------------|----------------|
| North America | |
| Toll Free | 1-888-576-9668 |
| Cincinnati | 1-513-742-8895 |
| Milpitas | 1-408-519-3898 |
| Irvine | 1-949-420-2500 |
| Ottawa | 1-815-434-8731 |

| | |
|---------------|-----------------|
| Brazil | |
| Toll Free | 0800-770-5355 |
| São Paulo | 55-11-5592-5367 |

| | |
|---------------|-----------------|
| Mexico | |
| Toll Free | 1-800-467-2415 |
| Mexico City | 52-55-6275-2727 |

ADVANTECH

Enabling an Intelligent Planet

Please verify specifications before quoting. This guide is intended for reference purposes only.
All product specifications are subject to change without notice.
No part of this publication may be reproduced in any form or by any means, electronic, photocopying, recording or otherwise, without prior written permission of the publisher.
All brand and product names are trademarks or registered trademarks of their respective companies.
© Advantech Co., Ltd. 2018

More Information



8600000410